

PRODUCT GUIDE

2022

EXPERIENCE
THE PERFORMANCE



A red-tinted photograph of a car's front wheel and headlight. The wheel is a multi-spoke alloy design, and the headlight is visible on the left. The background is a blurred, textured surface, possibly gravel or a road. A large, bold, white text overlay is positioned on the right side of the image.

EXPE PER

RIENCE THE
FORMANCE





| | |
|-----------------------------|---|
| 30 DAY TEST DRIVE | 6 |
|-----------------------------|---|

SPORT

| | |
|--|----|
| CHAMPIRO SX2 RS EXTREME PERFORMANCE SUMMER | 10 |
| CHAMPIRO SX2 EXTREME PERFORMANCE SUMMER | 12 |
| CHAMPIRO HPY MAX PERFORMANCE SUMMER | 14 |
| CHAMPIRO UHP ^{AS} ULTRA HIGH PERFORMANCE ALL-SEASON | 16 |

COMFORT

| | |
|---|----|
| MAXTOUR LX GRAND TOURING & CUV ALL-SEASON | 18 |
| MAXTOUR ALL SEASON PASSENGER ALL-SEASON | 20 |
| CHAMPIRO TOURING A/S TOURING & CUV ALL-SEASON | 22 |

SUV / PICKUP

| | |
|---|----|
| ADVENTURO HT HIGHWAY ALL-SEASON | 24 |
| SAVERO HT2 HIGHWAY ALL-SEASON | 26 |
| ADVENTURO ATX ON / OFF ROAD ALL-TERRAIN | 28 |
| ADVENTURO AT ³ ON / OFF ROAD ALL-TERRAIN | 30 |

PRO

| | |
|--|----|
| MAXMILER PRO COMMERCIAL VAN ALL-SEASON | 32 |
| MAXMILER ST TRAILER SERVICE | 34 |

| | |
|---|----|
| TREAD ACADEMY | 36 |
| DESIGNATIONS, LOAD INDEX & SPEED RATING | 37 |
| WARRANTIES | 38 |



It's your call.

30_{DAY}
Test Drive

EXPERIENCE THE PERFORMANCE

30 DAY TEST DRIVE

UP TO 500 MILES OR 30 DAYS, WHICHEVER COMES FIRST.

Buy a set of GT Radial tires and try them on your car or light truck.

Experience the performance of GT Radial tires for yourself. If you're not completely satisfied, just return them to the dealer where you bought them. Your GT Radial dealer will refund the purchase price—it's your call.

Visit www.GTRadial-US.com/30daytestdrive for more information.

**SATISFACTION
GUARANTEED**



CHAMPRO HPV



CHAMPRO UHP^{AS}



MAXTOUR LX



MAXTOUR ALL SEASON



CHAMPRO TOURING A/S



ADVENTURO HT



SAVERO HT2



ADVENTURO ATX



ADVENTURO AT³

CHAMPIRO SX2 RS

SEE PAGE 10 EXTREME PERFORMANCE SUMMER





ON / OFF ROAD ALL-TERRAIN SEE PAGE 28

ADVENTURO ATX

CHAMPIRO SX2 RS

EXTREME PERFORMANCE SUMMER

18 Inch 

Speed Rating: W 

35 - 40 Series 

UTQG: 200 A A UTQG



Extreme Grip



Dry



Wet



Handling

Champro SX2 RS is an evolution of the previous SX2 design. Utilizing all the strong points of the original SX2, the SX2 RS applies an all-new tread compound to refine the tire's performance. Keeping the extremely aggressive and proven asymmetric tread design, it offers increased cornering stability and grip in dry and wet conditions. Whether it's track days or professional drifting competition, the SX2 RS delivers the consistent traction and precise control you need.

FEATURES / BENEFITS

Dual Shoulder Blocks

Extra large shoulder blocks improve cornering stability and grip

Wide Center Rib

Stable handling along with improved traction and braking performance

Advanced Construction

Engineered to limit sidewall flex and enhance predictable handling

Asymmetric Tread Pattern

Proven to deliver optimal performance on track and street

High Performance Tread Compound

Race inspired compound formulated for both street and track

Rim Flange Protector

Protects wheel against light curbing



EXTREME PERFORMANCE SUMMER **CHAMPIRO SX2 RS**

| Tire Size | LI / SR | UTQG | Item Number | Measuring Rim inch | Rim Width Range inch | Max. Load lbs | Max. Pressure psi | Tread Depth 32nd | Overall Diameter inch | Section Width inch | Weight lbs | Side Wall |
|------------|---------|---------|-------------|--------------------|----------------------|---------------|-------------------|------------------|-----------------------|--------------------|------------|-----------|
| 255/35R18 | 94W XL | 200 A A | 100UA3685 | 9.0 | 8.5 - 10.0 | 1,477 | 50 | 7 | 25.0 | 10.2 | 24.9 | BSW |
| 245/40ZR18 | 93W | 200 A A | 100UA3683 | 8.5 | 8.0 - 9.5 | 1,433 | 51 | 7 | 25.7 | 9.7 | 25.4 | BSW |
| 295/40ZR18 | 103W | 200 A A | 100UA3680 | 10.5 | 10.0 - 11.5 | 1,930 | 51 | 7 | 27.4 | 11.8 | 31.1 | BSW |

LI Load Index **SR** Speed Rating **UTQG** Uniform Tire Quality Grade **BSW** Black Side Wall

AN OFFICIAL TIRE OF **FORMULA DRIFT**

CHAMPIRO SX2

EXTREME PERFORMANCE SUMMER

15 / 17 / 18 Inch 

Speed Rating: W 

35 - 50 Series 

UTQG: 200 A A - 260 A A UTQG



Extreme Grip



Dry



Wet



Handling

Champro SX2 is for drivers who need higher levels of grip, traction, response and control in dry and wet conditions. With an extremely aggressive asymmetric tread design for increased cornering stability and high-grip silica compound that gives consistent performance, it is suitable for track days, spirited driving and normal street use. When you're an enthusiast, traction and control is the name of the game.

FEATURES / BENEFITS

Dual Shoulder Blocks

Extra large shoulder blocks increase cornering stability and grip

Wide Center Rib

Improved handling, traction and braking performance

Gradient Step

Reduced heat generation in central tread ribs

Asymmetric Tread Pattern

Tuned for optimal performance on track and street

Silica Compound

Increased traction and grip in both dry and wet



EXTREME PERFORMANCE SUMMER **CHAMPIRO SX2**

| Tire Size | LI / SR | UTQG | Item Number | Measuring Rim inch | Rim Width Range inch | Max. Load lbs | Max. Pressure psi | Tread Depth 32nd | Overall Diameter inch | Section Width inch | Weight lbs | Side Wall |
|------------|---------|---------|-------------|--------------------|----------------------|---------------|-------------------|------------------|-----------------------|--------------------|------------|-----------|
| 195/50ZR15 | 82W | 200 A A | A129 | 6.0 | 5.5 - 7.0 | 1,047 | 51 | 8 | 22.6 | 7.9 | 18.7 | BSW |
| 235/40ZR17 | 90W | 200 A A | A326 | 8.5 | 8.0 - 9.5 | 1,323 | 51 | 8 | 24.4 | 9.5 | 24.7 | BSW |
| 245/40ZR17 | 91W | 260 A A | B612 | 8.5 | 8.0 - 9.5 | 1,356 | 51 | 8 | 24.7 | 9.8 | 26.2 | BSW |
| 215/45ZR17 | 87W | 260 A A | B610 | 7.0 | 7.0 - 8.0 | 1,201 | 51 | 8 | 24.6 | 8.4 | 23.0 | BSW |
| 225/45ZR17 | 91W | 260 A A | B611 | 7.5 | 7.0 - 8.5 | 1,356 | 51 | 8 | 25.0 | 8.9 | 24.6 | BSW |
| 235/45ZR17 | 94W | 200 A A | A227 | 8.0 | 7.5 - 9.0 | 1,477 | 51 | 8 | 25.4 | 9.3 | 26.1 | BSW |
| 265/35ZR18 | 97W XL | 200 A A | B602 | 9.5 | 9.0 - 10.5 | 1,609 | 49 | 8 | 25.3 | 10.7 | 27.4 | BSW |
| 235/40ZR18 | 91W | 200 A A | B603 | 8.5 | 8.0 - 9.5 | 1,356 | 51 | 8 | 25.4 | 9.5 | 26.7 | BSW |

LI Load Index **SR** Speed Rating **XL** Extra Load **UTQG** Uniform Tire Quality Grade **BSW** Black Side Wall



CHAMPIRO HPY

MAX PERFORMANCE SUMMER

30_{DAY}

Test Drive

17 - 20 Inch 

Speed Rating: V / W / Y 

35 - 65 Series 

UTQG: 300 AA A UTQG



Dry



Wet



Handling



Noise

Champiro HPY is a proven ultra high performance summer tire that provides excellent control, turn-in and grip in the curves. With an asymmetric tread design, it also has great straight-line stability and a silica tread compound that performs in both wet and dry conditions. Champiro HPY is a great choice to step up the capability of any high performance sports car, sedan or SUV.

FEATURES / BENEFITS

Asymmetric Tread Pattern

Provides outstanding wet and dry cornering and low noise

Solid Center Rib

Improved straight line stability and steering response

Stiff Tread Blocks

Excellent cornering stability at high speeds

Additional Shoulder Channels

Evacuates water to reduce hydroplaning

Silica Compound

Enhanced grip on wet surfaces



| Tire Size | LI / SR | UTQG | Item Number | Measuring Rim inch | Rim Width Range inch | Max. Load lbs | Max. Pressure psi | Tread Depth 32nd | Overall Diameter inch | Section Width inch | Weight lbs | Side Wall |
|------------|---------|----------|-------------|--------------------|----------------------|---------------|-------------------|------------------|-----------------------|--------------------|------------|-----------|
| 245/40ZR17 | 95Y XL | 300 AA A | B059 | 8.5 | 8.0 - 9.5 | 1,521 | 49 | 10 | 24.7 | 9.8 | 25.5 | BSW |
| 255/40ZR17 | 98Y XL | 300 AA A | B026 | 9.0 | 8.5 - 10.0 | 1,653 | 49 | 10 | 25.0 | 10.2 | 26.3 | BSW |
| 205/45ZR17 | 88W XL | 300 AA A | B349 | 7.0 | 6.5 - 7.5 | 1,235 | 49 | 10 | 24.3 | 8.1 | 20.2 | BSW |
| 215/45ZR17 | 91Y XL | 300 AA A | B058 | 7.0 | 7.0 - 8.0 | 1,356 | 49 | 10 | 24.6 | 8.4 | 22.2 | BSW |
| 225/45ZR17 | 94Y XL | 300 AA A | B057 | 7.5 | 7.0 - 8.5 | 1,477 | 49 | 10 | 25.0 | 8.9 | 23.4 | BSW |
| 235/45ZR17 | 97Y XL | 300 AA A | B046 | 8.0 | 7.5 - 9.0 | 1,609 | 49 | 10 | 25.4 | 9.3 | 24.8 | BSW |
| 245/45ZR17 | 99Y XL | 300 AA A | B045 | 8.0 | 7.5 - 9.0 | 1,709 | 49 | 10 | 25.7 | 9.6 | 26.4 | BSW |
| 205/50ZR17 | 93W XL | 300 AA A | B350 | 6.5 | 5.5 - 7.5 | 1,433 | 49 | 10 | 25.1 | 8.4 | 21.8 | BSW |
| 225/50ZR17 | 98Y XL | 300 AA A | B027 | 7.0 | 6.0 - 8.0 | 1,653 | 49 | 10 | 25.9 | 9.2 | 26.1 | BSW |
| 235/50ZR17 | 100W XL | 300 AA A | B028 | 7.5 | 6.5 - 8.5 | 1,764 | 49 | 10 | 26.3 | 9.5 | 26.2 | BSW |
| 215/55ZR17 | 94W | 300 AA A | B109 | 7.0 | 6.0 - 7.5 | 1,477 | 44 | 10 | 26.3 | 8.9 | 23.6 | BSW |
| 225/65R17 | 102V | 300 AA A | B347 | 6.5 | 6.0 - 8.0 | 1,874 | 44 | 10 | 28.5 | 9.0 | 28.8 | BSW |
| 235/65R17 | 108V XL | 300 AA A | B344 | 7.0 | 6.5 - 8.5 | 2,205 | 49 | 10 | 29.1 | 9.4 | 30.7 | BSW |
| 255/35ZR18 | 94Y XL | 300 AA A | B030 | 9.0 | 8.5 - 10.0 | 1,477 | 49 | 10 | 25.0 | 10.2 | 24.3 | BSW |
| 265/35ZR18 | 97Y XL | 300 AA A | B048 | 9.5 | 9.0 - 10.5 | 1,609 | 49 | 10 | 25.7 | 10.7 | 27.7 | BSW |
| 205/40ZR18 | 86Y XL | 300 AA A | B352 | 7.5 | 7.0 - 8.0 | 1,168 | 49 | 10 | 24.4 | 8.3 | 20.3 | BSW |
| 225/40ZR18 | 92Y XL | 300 AA A | B023 | 8.0 | 7.5 - 9.0 | 1,389 | 49 | 10 | 25.1 | 9.1 | 23.7 | BSW |
| 235/40ZR18 | 95Y XL | 300 AA A | B022 | 8.5 | 8.0 - 9.5 | 1,521 | 49 | 10 | 25.4 | 9.5 | 24.9 | BSW |
| 245/40ZR18 | 97Y XL | 300 AA A | B024 | 8.5 | 8.0 - 9.5 | 1,609 | 49 | 10 | 25.7 | 9.8 | 24.4 | BSW |
| 225/45ZR18 | 91Y | 300 AA A | B054 | 7.5 | 7.0 - 8.5 | 1,356 | 51 | 10 | 25.9 | 8.9 | 24.8 | BSW |
| 245/45ZR18 | 100Y XL | 300 AA A | B029 | 8.0 | 7.5 - 9.0 | 1,764 | 49 | 10 | 26.7 | 9.6 | 27.8 | BSW |
| 255/45ZR18 | 103Y XL | 300 AA A | B055 | 8.5 | 8.0 - 9.5 | 1,929 | 49 | 10 | 27.0 | 10.0 | 28.8 | BSW |
| 235/50ZR18 | 101Y XL | 300 AA A | B056 | 7.5 | 6.5 - 8.5 | 1,819 | 49 | 10 | 27.4 | 9.4 | 27.7 | BSW |
| 235/55ZR18 | 104W XL | 300 AA A | B346 | 7.5 | 6.5 - 8.5 | 1,984 | 49 | 10 | 28.1 | 9.6 | 29.3 | BSW |
| 255/55ZR18 | 109Y XL | 300 AA A | B342 | 8.0 | 7.0 - 9.0 | 2,271 | 49 | 10 | 29.0 | 10.4 | 32.9 | BSW |
| 235/60R18 | 107V XL | 300 AA A | B345 | 7.0 | 6.5 - 8.5 | 2,149 | 49 | 10 | 29.1 | 9.4 | 30.4 | BSW |
| 225/35ZR19 | 88Y XL | 300 AA A | B049 | 8.0 | 7.5 - 9.0 | 1,235 | 49 | 10 | 25.2 | 9.1 | 23.3 | BSW |
| 235/35ZR19 | 91Y XL | 300 AA A | B050 | 8.5 | 8.0 - 9.5 | 1,356 | 49 | 10 | 25.5 | 9.5 | 24.2 | BSW |
| 255/35ZR19 | 96Y XL | 300 AA A | B051 | 9.0 | 8.5 - 10.0 | 1,565 | 49 | 10 | 26.0 | 10.2 | 27.5 | BSW |
| 225/40ZR19 | 93Y XL | 300 AA A | B025 | 8.0 | 7.5 - 9.0 | 1,433 | 49 | 10 | 26.1 | 9.1 | 23.0 | BSW |
| 255/40ZR19 | 96Y | 300 AA A | B053 | 9.0 | 8.5 - 10.0 | 1,565 | 51 | 10 | 27.0 | 10.2 | 29.5 | BSW |
| 255/50ZR19 | 107Y XL | 300 AA A | B343 | 8.0 | 7.0 - 9.0 | 2,149 | 49 | 10 | 29.1 | 10.4 | 32.8 | BSW |
| 255/35ZR20 | 97Y XL | 300 AA A | B052 | 9.0 | 8.5 - 10.0 | 1,609 | 49 | 10 | 27.0 | 10.2 | 28.8 | BSW |
| 255/45ZR20 | 101Y | 300 AA A | B348 | 8.5 | 8.0 - 9.5 | 1,819 | 44 | 10 | 29.1 | 10.0 | 32.0 | BSW |

LI Load Index **SR** Speed Rating **XL** Extra Load **UTQG** Uniform Tire Quality Grade **BSW** Black Side Wall

CHAMPIRO UHP^{AS}

ULTRA HIGH PERFORMANCE ALL-SEASON

30^{DAY}

Test Drive

15 - 20 Inch 

Speed Rating: V / W / Y 

40 - 55 Series 

UTQG: 500 A A UTQG

M+S Rated M+S

45^k

Limited
Warranty



Wet



Handling



Comfort

Champro UHP^{AS} is for drivers who are looking for an ultra high performance tire and also need the practicality of all-season performance and better wear life. The advanced and stylish tread design delivers in dry, wet and light snow conditions and is backed by a 45,000 mile tread life warranty. The advanced Nanometer Silica tread compound improves grip and the full depth sipes aid in providing all-season performance.

FEATURES / BENEFITS

Variable Pitch Technology

Reduced road noise for a quieter ride

Rim Protector

Protect wheel from curb damage

Large Shoulder Blocks

Increased rigidity for precise handling

Full Depth Sipes

Biting edges for grip throughout the life of the tire

Nanometer Silica Compound

Improved wet grip and reduced rolling resistance



ULTRA HIGH PERFORMANCE ALL-SEASON **CHAMPIRO UHP^{AS}**

| Tire Size | LI / SR | UTQG | Item Number | Measuring Rim inch | Rim Width Range inch | Max. Load lbs | Max. Pressure psi | Tread Depth 32nd | Overall Diameter inch | Section Width inch | Weight lbs | Side Wall |
|------------|---------|---------|-------------|--------------------|----------------------|---------------|-------------------|------------------|-----------------------|--------------------|------------|-----------|
| 195/55R15 | 85V | 500 A A | AS041 | 6.0 | 5.5 - 7.0 | 1,135 | 44 | 10 | 23.4 | 7.9 | 18.9 | BSW |
| 205/50R16 | 87V | 500 A A | AS039 | 6.5 | 5.5 - 7.5 | 1,201 | 44 | 10 | 24.1 | 8.4 | 20.5 | BSW |
| 225/50ZR16 | 92W | 500 A A | AS044 | 7.0 | 6.0 - 8.0 | 1,389 | 51 | 10 | 24.9 | 9.2 | 25.5 | BSW |
| 205/55R16 | 91V | 500 A A | AS032 | 6.5 | 5.5 - 7.5 | 1,356 | 44 | 10 | 24.9 | 8.4 | 21.8 | BSW |
| 225/55ZR16 | 95W | 500 A A | AS042 | 7.0 | 6.0 - 8.0 | 1,521 | 51 | 10 | 25.7 | 9.2 | 26.3 | BSW |
| 215/45ZR17 | 91W XL | 500 A A | AS031 | 7.0 | 7.0 - 8.0 | 1,356 | 50 | 10 | 24.6 | 8.4 | 21.5 | BSW |
| 225/45ZR17 | 94W XL | 500 A A | AS033 | 7.5 | 7.0 - 8.5 | 1,477 | 50 | 10 | 25.0 | 8.9 | 23.7 | BSW |
| 235/45ZR17 | 97W XL | 500 A A | AS036 | 8.0 | 7.5 - 9.0 | 1,609 | 50 | 10 | 25.4 | 9.3 | 25.2 | BSW |
| 245/45ZR17 | 95W | 500 A A | AS046 | 8.0 | 7.5 - 9.0 | 1,521 | 51 | 10 | 25.7 | 9.6 | 26.2 | BSW |
| 205/50ZR17 | 93W XL | 500 A A | AS037 | 6.5 | 5.5 - 7.5 | 1,433 | 50 | 10 | 25.1 | 8.4 | 23.5 | BSW |
| 215/50ZR17 | 91W | 500 A A | AS035 | 7.0 | 6.0 - 7.5 | 1,356 | 51 | 10 | 25.5 | 8.9 | 23.1 | BSW |
| 225/50ZR17 | 94W | 500 A A | AS030 | 7.0 | 6.0 - 8.0 | 1,477 | 51 | 10 | 25.9 | 9.2 | 26.6 | BSW |
| 215/55R17 | 94V | 500 A A | AS029 | 7.0 | 6.0 - 7.5 | 1,477 | 44 | 10 | 26.3 | 8.9 | 25.6 | BSW |
| 225/55ZR17 | 97W | 500 A A | AS034 | 7.0 | 6.0 - 8.0 | 1,609 | 51 | 10 | 26.8 | 9.2 | 27.1 | BSW |
| 235/55ZR17 | 99W | 500 A A | AS050 | 7.5 | 6.5 - 8.5 | 1,709 | 51 | 10 | 27.2 | 9.6 | 28.4 | BSW |
| 225/40ZR18 | 92Y XL | 500 A A | AS040 | 8.0 | 7.5 - 9.0 | 1,389 | 50 | 10 | 25.1 | 9.1 | 24.4 | BSW |
| 235/40ZR18 | 95Y XL | 500 A A | AS048 | 8.5 | 8.0 - 9.5 | 1,521 | 50 | 10 | 25.4 | 9.5 | 26.0 | BSW |
| 245/40ZR18 | 97Y XL | 500 A A | AS047 | 8.5 | 8.0 - 9.5 | 1,609 | 50 | 10 | 25.7 | 9.8 | 27.5 | BSW |
| 215/45ZR18 | 93Y XL | 500 A A | AS057 | 7.0 | 7.0 - 8.0 | 1,433 | 50 | 10 | 25.6 | 8.4 | 23.7 | BSW |
| 225/45ZR18 | 91W | 500 A A | AS043 | 7.5 | 7.0 - 8.5 | 1,356 | 51 | 10 | 25.9 | 8.9 | 24.9 | BSW |
| 235/45ZR18 | 94W | 500 A A | AS056 | 8.0 | 7.5 - 9.0 | 1,477 | 51 | 10 | 26.3 | 9.3 | 26.0 | BSW |
| 245/45ZR18 | 96Y | 500 A A | AS038 | 8.0 | 7.5 - 9.0 | 1,565 | 51 | 10 | 26.7 | 9.6 | 28.3 | BSW |
| 255/45ZR18 | 99Y | 500 A A | AS053 | 8.5 | 8.0 - 9.5 | 1,709 | 51 | 10 | 27.0 | 10.0 | 30.2 | BSW |
| 225/50ZR18 | 95W | 500 A A | AS049 | 7.0 | 6.0 - 8.0 | 1,521 | 51 | 10 | 26.9 | 9.2 | 27.9 | BSW |
| 235/50ZR18 | 101W XL | 500 A A | AS045 | 7.5 | 6.5 - 8.5 | 1,819 | 50 | 10 | 27.3 | 9.6 | 29.1 | BSW |
| 245/40ZR19 | 94Y | 500 A A | AS052 | 8.5 | 8.0 - 9.5 | 1,477 | 51 | 10 | 26.7 | 9.8 | 28.7 | BSW |
| 255/40ZR19 | 100Y XL | 500 A A | AS055 | 9.0 | 8.5 - 10.0 | 1,764 | 50 | 10 | 27.0 | 10.2 | 30.1 | BSW |
| 245/45ZR19 | 98Y | 500 A A | AS054 | 8.0 | 7.5 - 9.0 | 1,653 | 51 | 10 | 27.7 | 9.6 | 29.9 | BSW |
| 275/40ZR20 | 106Y XL | 500 A A | AS028 | 9.5 | 9.0 - 11.0 | 2,094 | 50 | 10 | 28.7 | 10.9 | 33.3 | BSW |
| 245/45ZR20 | 103Y XL | 500 A A | AS051 | 8.0 | 7.5 - 9.0 | 1,929 | 50 | 10 | 28.7 | 9.6 | 31.2 | BSW |

LI Load Index **SR** Speed Rating **XL** Extra Load **UTQG** Uniform Tire Quality Grade **BSW** Black Side Wall

MAXTOUR LX

GRAND TOURING & CUV ALL-SEASON

15 - 20 Inch 

Speed Rating: T / H / V 

45 - 70 Series 

UTQG: 600 A A UTQG

M+S Rated M+S

70k
Limited
Warranty


Road Hazard
Warranty


Wet


Noise

24HR
Roadside
Assistance

30DAY
Test Drive

Maxtour LX delivers a premium ride and all-season performance with a 70,000 mile tread life warranty. It features full depth sipes for excellent traction in the wet and light snow, and the Harmonically Optimized Pitch Sequencing design limits road noise for the life of the tire. With fitments for popular passenger cars and CUV's and Road Hazard Warranty included, you'll enjoy worry-free luxury performance.



FEATURES / BENEFITS

Asymmetric Tread Pattern

Tuned for optimal all-season performance

Full Depth Sipes

Biting edges for grip throughout the life of the tire

Stiff Tread Blocks

Precise vehicle handling and steering response

Additional Shoulder Channels

Evacuates water to reduce hydroplaning

Independent Shoulder Groove

Improved vehicle handling


Harmonically Optimized Pitch Sequencing

Reduced road noise generation for a quieter ride

| Tire Size | LI / SR | UTQG | Item Number | Measuring Rim inch | Rim Width Range inch | Max. Load lbs | Max. Pressure psi | Tread Depth 32nd | Overall Diameter inch | Section Width inch | Weight lbs | Side Wall |
|-----------|---------|---------|-------------|--------------------|----------------------|---------------|-------------------|------------------|-----------------------|--------------------|------------|-----------|
| 185/60R15 | 84H | 600 A A | AS115 | 5.5 | 5.0 - 6.5 | 1,102 | 44 | 10 | 23.7 | 7.4 | 17.2 | BSW |
| 195/65R15 | 91H | 600 A A | AS178 | 6.0 | 5.5 - 7.0 | 1,356 | 44 | 10 | 25.0 | 7.9 | 19.2 | BSW |
| 195/55R16 | 87V | 600 A A | AS116 | 6.0 | 5.5 - 7.0 | 1,201 | 44 | 10 | 24.4 | 7.9 | 18.7 | BSW |
| 205/55R16 | 91V | 600 A A | 100UA3537 | 6.5 | 5.5 - 7.5 | 1,356 | 44 | 10 | 24.9 | 8.4 | 19.7 | BSW |
| 215/55R16 | 93H | 600 A A | AS119 | 7.0 | 6.0 - 7.5 | 1,433 | 44 | 10 | 25.3 | 8.9 | 22.7 | BSW |
| 205/60R16 | 92V | 600 A A | AS117 | 6.0 | 5.5 - 7.5 | 1,389 | 44 | 10 | 25.7 | 8.2 | 22.3 | BSW |
| 215/60R16 | 95V | 600 A A | 100UA3536 | 6.5 | 6.0 - 7.5 | 1,521 | 44 | 10 | 26.1 | 8.6 | 22.0 | BSW |
| 225/60R16 | 98H | 600 A A | 100UA3538 | 6.5 | 6.0 - 8.0 | 1,653 | 44 | 10 | 26.6 | 9.0 | 23.1 | BSW |
| 205/65R16 | 95H | 600 A A | AS118 | 6.0 | 5.5 - 7.5 | 1,521 | 44 | 10 | 26.5 | 8.2 | 22.4 | BSW |
| 215/65R16 | 98H | 600 A A | 100UA3540 | 6.5 | 6.0 - 7.5 | 1,653 | 44 | 10 | 26.9 | 8.6 | 22.8 | BSW |
| 225/65R16 | 100H | 600 A A | 100UA3548 | 6.5 | 6.0 - 8.0 | 1,764 | 44 | 10 | 27.5 | 8.9 | 24.4 | BSW |
| 235/65R16 | 103T | 600 A A | AS179 | 7.0 | 6.5 - 8.5 | 1,929 | 44 | 10 | 28.0 | 9.5 | 27.3 | BSW |
| 205/70R16 | 97H | 600 A A | AS180 | 6.0 | 5.0 - 7.0 | 1,609 | 44 | 10 | 27.3 | 8.2 | 23.6 | BSW |
| 215/45R17 | 87V | 600 A A | 100UA3504 | 7.0 | 7.0 - 8.0 | 1,201 | 44 | 10 | 24.7 | 8.4 | 19.6 | BSW |
| 225/45R17 | 91V | 600 A A | 100UA3502 | 7.5 | 7.0 - 8.5 | 1,356 | 44 | 10 | 24.9 | 8.9 | 23.1 | BSW |
| 205/50R17 | 93V XL | 600 A A | 100UA3526 | 6.5 | 5.5 - 7.5 | 1,433 | 50 | 10 | 25.1 | 8.4 | 21.2 | BSW |
| 215/50R17 | 95V XL | 600 A A | 100UA3525 | 7.0 | 6.0 - 7.5 | 1,521 | 50 | 10 | 25.5 | 8.7 | 22.4 | BSW |
| 225/50R17 | 94V | 600 A A | 100UA3524 | 7.0 | 6.0 - 8.0 | 1,477 | 44 | 10 | 26.0 | 9.0 | 23.3 | BSW |
| 235/50R17 | 96V | 600 A A | AS112 | 7.5 | 6.5 - 8.5 | 1,565 | 44 | 10 | 26.3 | 9.7 | 25.6 | BSW |
| 215/55R17 | 94V | 600 A A | 100UA3521 | 7.0 | 6.0 - 7.5 | 1,477 | 44 | 10 | 26.3 | 8.8 | 23.4 | BSW |
| 225/55R17 | 97V | 600 A A | 100UA3523 | 7.0 | 6.0 - 8.0 | 1,609 | 44 | 10 | 26.9 | 9.0 | 24.3 | BSW |
| 235/55R17 | 99H | 600 A A | AS120 | 7.5 | 6.5 - 8.5 | 1,709 | 44 | 10 | 27.2 | 9.6 | 26.9 | BSW |
| 215/60R17 | 96H | 600 A A | 100UA3545 | 6.5 | 6.0 - 7.5 | 1,565 | 44 | 10 | 27.1 | 8.6 | 23.5 | BSW |
| 225/60R17 | 99H | 600 A A | 100UA3522 | 6.5 | 6.0 - 8.0 | 1,709 | 44 | 10 | 27.5 | 8.9 | 24.2 | BSW |
| 235/60R17 | 102H | 600 A A | 100UA3546 | 7.0 | 6.5 - 8.5 | 1,874 | 44 | 10 | 28.1 | 9.4 | 25.7 | BSW |
| 215/65R17 | 99H | 600 A A | 100UA3547 | 6.5 | 6.0 - 7.5 | 1,709 | 44 | 10 | 28.0 | 8.7 | 24.1 | BSW |
| 225/65R17 | 102H | 600 A A | 100UA3539 | 6.5 | 6.0 - 8.0 | 1,874 | 44 | 10 | 28.5 | 9.0 | 25.3 | BSW |
| 235/65R17 | 104H | 600 A A | 100UA3542 | 7.0 | 6.5 - 8.5 | 1,984 | 44 | 10 | 29.0 | 9.4 | 27.2 | BSW |
| 225/40R18 | 92V XL | | | | | | | | | | | BSW |
| 225/45R18 | 95V XL | 600 A A | AS107 | 7.5 | 7.0 - 8.5 | 1,521 | 50 | 10 | 26.1 | 9.0 | 26.0 | BSW |
| 235/45R18 | 94V | 600 A A | AS122 | 8.0 | 7.5 - 9.0 | 1,477 | 44 | 10 | 26.3 | 9.3 | 26.5 | BSW |
| 245/45R18 | 96V | 600 A A | AS111 | 8.0 | 7.5 - 9.0 | 1,565 | 44 | 11 | 26.7 | 9.6 | 26.2 | BSW |
| 225/50R18 | 95V | 600 A A | AS113 | 7.0 | 6.0 - 8.0 | 1,521 | 44 | 10 | 26.9 | 9.2 | 25.1 | BSW |
| 235/50R18 | 97V | 600 A A | AS123 | 7.5 | 6.5 - 8.5 | 1,609 | 44 | 10 | 27.3 | 9.7 | 26.7 | BSW |
| 215/55R18 | 95H | | | | | | | | | | | BSW |
| 225/55R18 | 98V | 600 A A | 100UA3512 | 7.0 | 6.0 - 8.0 | 1,653 | 44 | 10 | 27.8 | 9.0 | 26.3 | BSW |
| 235/55R18 | 100H | 600 A A | 100UA3527 | 7.5 | 6.5 - 8.5 | 1,764 | 44 | 10 | 28.1 | 9.7 | 26.9 | BSW |
| 225/60R18 | 100H | 600 A A | AS121 | 6.5 | 6.0 - 8.0 | 1,764 | 44 | 10 | 28.6 | 9.0 | 27.3 | BSW |
| 235/60R18 | 103V | 600 A A | 100UA3552 | 7.0 | 6.5 - 8.5 | 1,929 | 44 | 10 | 29.1 | 9.3 | 27.2 | BSW |
| 245/60R18 | 105H | 600 A A | 100UA3553 | 7.0 | 7.0 - 8.5 | 2,039 | 44 | 10 | 29.6 | 9.8 | 29.9 | BSW |
| 235/65R18 | 106H | 600 A A | 100UA3554 | 7.0 | 6.5 - 8.5 | 2,094 | 44 | 10 | 30.1 | 9.4 | 29.1 | BSW |
| 235/40R19 | 96V XL | | | | | | | | | | | BSW |
| 235/45R19 | 95H | | | | | | | | | | | BSW |
| 245/45R19 | 102V XL | 600 A A | AS110 | 8.0 | 7.5 - 9.0 | 1,874 | 50 | 10 | 27.7 | 9.6 | 27.8 | BSW |
| 235/50R19 | 99V | | | | | | | | | | | BSW |
| 255/50R19 | 107V XL | | | | | | | | | | | BSW |
| 225/55R19 | 99V | 600 A A | AS109 | 7.0 | 6.0 - 8.0 | 1,709 | 44 | 10 | 28.8 | 9.2 | 28.2 | BSW |
| 235/55R19 | 101V | 600 A A | 100UA3508 | 7.5 | 6.5 - 8.5 | 1,819 | 44 | 10 | 29.1 | 9.5 | 28.4 | BSW |
| 245/45R20 | 99V | 600 A A | AS114 | 8.0 | 7.5 - 9.0 | 1,709 | 44 | 10 | 28.7 | 9.6 | 28.4 | BSW |
| 245/50R20 | 102V | 600 A A | AS108 | 7.5 | 7.0 - 8.5 | 1,874 | 44 | 10 | 29.7 | 10.0 | 31.5 | BSW |
| 255/50R20 | 105V | | | | | | | | | | | BSW |
| 235/55R20 | 102V | 600 A A | 100UA3515 | 7.5 | 6.5 - 8.5 | 1,874 | 44 | 10 | 30.1 | 9.5 | 29.7 | BSW |

LI Load Index SR Speed Rating XL Extra Load UTQG Uniform Tire Quality Grade BSW Black Side Wall

SPECIFICATIONS NOT FINAL



MAXTOUR All Season

PASSENGER ALL-SEASON

30 DAY

Test Drive

13 - 16 Inch 

Speed Rating: T / H 

60 - 75 Series 

UTQG: 520 A A - 580 A B UTQG

M+S Rated **M+S**

60k

Limited
Warranty



Road Hazard
Warranty



Comfort

24HR

Roadside
Assistance

Maxtour All Season offers great mileage, improved all-season performance, a quiet, comfortable ride and represents an outstanding value. Backed by a 60,000 mile tread life warranty and a Road Hazard Warranty, you can drive with ease of mind when you're on Maxtour All Season.

FEATURES / BENEFITS

Variable Pitch Technology

Reduced tire noise

Zig-Zag Sipes

Additional biting edges for improved traction

Lateral Grooves

Evacuates water and slush to improve wet and light snow traction

All-Season Compound

Enhanced performance in wet and light snow conditions



PASSENGER ALL-SEASON **MAXTOUR All Season**

| Tire Size | LI / SR | UTQG | Item Number | Measuring Rim inch | Rim Width Range inch | Max. Load lbs | Max. Pressure psi | Tread Depth 32nd | Overall Diameter inch | Section Width inch | Weight lbs | Side Wall |
|-----------|---------|---------|-------------|--------------------|----------------------|---------------|-------------------|------------------|-----------------------|--------------------|------------|-----------|
| 175/70R13 | 82T | 580 A B | AS065 | 5.0 | 4.5 - 6.0 | 1,047 | 44 | 10 | 22.7 | 7.0 | 14.9 | BSW |
| 175/65R14 | 82T | 580 A B | AS064 | 5.0 | 5.0 - 6.0 | 1,047 | 44 | 10 | 23.0 | 7.0 | 15.6 | BSW |
| 175/70R14 | 84T | 580 A B | AS066 | 5.0 | 4.5 - 6.0 | 1,102 | 44 | 10 | 23.7 | 7.0 | 16.1 | BSW |
| 185/70R14 | 88H | 520 A A | AS070 | 5.5 | 4.5 - 6.0 | 1,235 | 44 | 10 | 24.3 | 7.4 | 17.3 | BSW |
| 195/70R14 | 91T | 580 A B | AS071 | 6.0 | 5.0 - 6.5 | 1,356 | 44 | 10 | 24.8 | 7.9 | 18.4 | BSW |
| 185/60R15 | 84T | 580 A B | AS067 | 5.5 | 5.0 - 6.5 | 1,102 | 44 | 10 | 23.7 | 7.4 | 17.4 | BSW |
| 195/60R15 | 88T | 580 A B | AS058 | 6.0 | 5.5 - 7.0 | 1,235 | 44 | 10 | 24.2 | 7.9 | 18.1 | BSW |
| 205/60R15 | 91H | 520 A A | AS072 | 6.0 | 5.5 - 7.5 | 1,356 | 44 | 10 | 24.7 | 8.2 | 19.8 | BSW |
| 185/65R15 | 88T | 580 A B | AS069 | 5.5 | 5.0 - 6.5 | 1,235 | 44 | 10 | 24.5 | 7.4 | 18.0 | BSW |
| 185/65R15 | 88H | 520 A A | AS068 | 5.5 | 5.0 - 6.5 | 1,235 | 44 | 10 | 24.5 | 7.4 | 18.0 | BSW |
| 195/65R15 | 91T | 580 A B | AS059 | 6.0 | 5.5 - 7.0 | 1,356 | 44 | 10 | 25.0 | 7.9 | 19.4 | BSW |
| 205/65R15 | 94T | 580 A B | AS061 | 6.0 | 5.5 - 7.5 | 1,477 | 44 | 10 | 25.5 | 8.2 | 21.7 | BSW |
| 215/65R15 | 96T | 580 A B | AS075 | 6.5 | 6.0 - 7.5 | 1,565 | 44 | 10 | 26.0 | 8.7 | 23.4 | BSW |
| 205/70R15 | 96T | 580 A B | AS073 | 6.0 | 5.0 - 7.0 | 1,565 | 44 | 10 | 26.3 | 8.2 | 22.0 | BSW |
| 205/75R15 | 97T | 580 A B | AS074 | 5.5 | 5.0 - 7.0 | 1,609 | 44 | 10 | 27.1 | 8.0 | 22.8 | BSW |
| 215/75R15 | 100T | 580 A B | AS076 | 6.0 | 5.5 - 7.0 | 1,764 | 44 | 10 | 27.7 | 8.5 | 24.1 | BSW |
| 205/60R16 | 92T | 580 A B | AS060 | 6.0 | 5.5 - 7.5 | 1,389 | 44 | 10 | 25.7 | 8.2 | 20.9 | BSW |
| 215/60R16 | 95T | 580 A B | AS062 | 6.5 | 6.0 - 7.5 | 1,521 | 44 | 10 | 26.1 | 8.7 | 23.3 | BSW |
| 225/60R16 | 98T | 580 A B | AS063 | 6.5 | 6.0 - 8.0 | 1,653 | 44 | 10 | 26.6 | 9.0 | 24.6 | BSW |

LI Load Index **SR** Speed Rating **UTQG** Uniform Tire Quality Grade **BSW** Black Side Wall

CHAMPIRO TOURING A/S

TOURING & CUV ALL-SEASON

30
DAY

Test Drive

14 - 20 Inch 

Speed Rating: T / H / V 

45 - 70 Series 

UTQG: 540 A A UTQG

M+S Rated **M+S**

60k

Limited
Warranty



Road Hazard
Warranty



Comfort

24
HR

Roadside
Assistance

Champiro Touring A/S is an all season touring tire designed for the latest passenger cars and crossover vehicles. It combines precise handling and control with a quiet and comfortable ride. Backed by a 60,000 mile limited warranty, the Champiro Touring A/S also delivers great mileage for an outstanding value.

FEATURES / BENEFITS

Full Depth Sipes

Improved grip and biting edges for all-season performance

Tread Grooves

Wide circumferential grooves ensure water drainage and improved wet performance

Large Shoulder Blocks

Increased tread pattern stiffness for improved handling and cornering

Variable Pitch Tread Blocks

Reduced tread pattern noise for a quiet ride



TOURING & CUV ALL-SEASON **CHAMPIRO TOURING A/S**

| Tire Size | LI / SR | UTQG | Item Number | Measuring Rim inch | Rim Width Range inch | Max. Load lbs | Max. Pressure psi | Tread Depth 32nd | Overall Diameter inch | Section Width inch | Weight lbs | Side Wall |
|-----------|---------|---------|-------------|--------------------|----------------------|---------------|-------------------|------------------|-----------------------|--------------------|------------|-----------|
| 185/65R14 | 86H | 540 A A | B513 | 5.5 | 5.0 - 6.5 | 1,168 | 44 | 10 | 23.5 | 7.4 | 16.7 | BSW |
| 195/60R15 | 88H | 540 A A | B510 | 6.0 | 5.5 - 7.0 | 1,235 | 44 | 10 | 24.2 | 7.9 | 18.8 | BSW |
| 175/65R15 | 84H | 540 A A | B535 | 5.0 | 5.0 - 6.0 | 1,102 | 44 | 10 | 24.0 | 7.0 | 16.9 | BSW |
| 195/65R15 | 91H | 540 A A | B506 | 6.0 | 5.5 - 7.0 | 1,356 | 44 | 10 | 25.0 | 7.9 | 19.2 | BSW |
| 205/65R15 | 94H | 540 A A | B529 | 6.0 | 5.5 - 7.5 | 1,477 | 44 | 10 | 25.5 | 8.2 | 21.5 | BSW |
| 215/70R15 | 98H | 540 A A | B507 | 6.5 | 5.5 - 7.0 | 1,653 | 44 | 10 | 26.9 | 8.7 | 23.9 | BSW |
| 205/55R16 | 91H | 540 A A | B508 | 6.5 | 5.5 - 7.5 | 1,356 | 44 | 10 | 24.9 | 8.4 | 20.2 | BSW |
| 215/55R16 | 93H | 540 A A | B530 | 7.0 | 6.0 - 7.5 | 1,433 | 44 | 10 | 25.3 | 8.9 | 22.8 | BSW |
| 205/60R16 | 92V | 540 A A | B511 | 6.0 | 5.5 - 7.5 | 1,389 | 44 | 10 | 25.7 | 8.2 | 22.3 | BSW |
| 215/60R16 | 95H | 540 A A | B509 | 6.5 | 6.0 - 7.5 | 1,521 | 44 | 10 | 26.1 | 8.7 | 23.8 | BSW |
| 215/60R16 | 95V | 540 A A | B528 | 6.5 | 6.0 - 7.5 | 1,521 | 44 | 10 | 26.1 | 8.7 | 23.8 | BSW |
| 225/60R16 | 98H | 540 A A | B512 | 6.5 | 6.0 - 8.0 | 1,653 | 44 | 10 | 26.6 | 9.0 | 24.6 | BSW |
| 235/60R16 | 100H | 540 A A | B519 | 7.0 | 6.5 - 8.5 | 1,764 | 44 | 10 | 27.1 | 9.4 | 26.6 | BSW |
| 205/65R16 | 95H | 540 A A | B595 | 6.0 | 5.5 - 7.5 | 1,521 | 44 | 10 | 26.5 | 8.2 | 22.9 | BSW |
| 215/65R16 | 98H | 540 A A | B515 | 6.5 | 6.0 - 7.5 | 1,653 | 44 | 10 | 27.0 | 8.7 | 24.7 | BSW |
| 225/65R16 | 100T | 540 A A | B534 | 6.5 | 6.0 - 8.0 | 1,764 | 44 | 10 | 27.5 | 9.0 | 25.7 | BSW |
| 235/65R16 | 103T | 540 A A | B526 | 7.0 | 6.5 - 8.5 | 1,929 | 44 | 10 | 28.0 | 9.4 | 27.4 | BSW |
| 215/45R17 | 87V | 540 A A | B754 | 7.0 | 7.0 - 8.0 | 1,201 | 44 | 10 | 24.7 | 8.4 | 20.8 | BSW |
| 225/45R17 | 91V | 540 A A | B755 | 7.5 | 7.0 - 8.5 | 1,356 | 44 | 10 | 25.0 | 8.9 | 24.2 | BSW |
| 205/50R17 | 93V XL | 540 A A | B596 | 6.5 | 5.5 - 7.5 | 1,433 | 50 | 10 | 25.1 | 8.4 | 22.5 | BSW |
| 215/50R17 | 95V XL | 540 A A | B597 | 7.0 | 6.0 - 7.5 | 1,521 | 50 | 10 | 25.5 | 8.9 | 23.9 | BSW |
| 225/50R17 | 94V | 540 A A | B598 | 7.0 | 6.0 - 8.0 | 1,477 | 44 | 10 | 25.9 | 9.2 | 24.8 | BSW |
| 235/50R17 | 96V | 540 A A | B756 | 7.5 | 6.5 - 8.5 | 1,565 | 44 | 10 | 26.3 | 9.7 | 25.1 | BSW |
| 215/55R17 | 94V | 540 A A | B514 | 7.0 | 6.0 - 7.5 | 1,477 | 44 | 10 | 26.3 | 8.9 | 24.6 | BSW |
| 225/55R17 | 97V | 540 A A | B518 | 7.0 | 6.0 - 8.0 | 1,609 | 44 | 10 | 26.8 | 9.2 | 25.8 | BSW |
| 235/55R17 | 99H | 540 A A | B523 | 7.5 | 6.5 - 8.5 | 1,709 | 44 | 10 | 27.2 | 9.6 | 27.3 | BSW |
| 215/60R17 | 96H | 540 A A | B521 | 6.5 | 6.0 - 7.5 | 1,565 | 44 | 10 | 27.2 | 8.7 | 24.4 | BSW |
| 225/60R17 | 99H | 540 A A | B520 | 6.5 | 6.0 - 8.0 | 1,709 | 44 | 10 | 27.6 | 9.0 | 26.4 | BSW |
| 235/60R17 | 102T | 540 A A | B522 | 7.0 | 6.5 - 8.5 | 1,874 | 44 | 10 | 28.1 | 9.4 | 27.3 | BSW |
| 215/65R17 | 99T | 540 A A | B525 | 6.5 | 6.0 - 7.5 | 1,709 | 44 | 10 | 28.0 | 8.7 | 25.7 | BSW |
| 225/65R17 | 102H | 540 A A | B517 | 6.5 | 6.0 - 8.0 | 1,874 | 44 | 10 | 28.5 | 9.0 | 26.6 | BSW |
| 235/65R17 | 104H | 540 A A | B516 | 7.0 | 6.5 - 8.5 | 1,984 | 44 | 10 | 29.1 | 9.4 | 28.4 | BSW |
| 225/45R18 | 95V XL | 540 A A | B757 | 7.5 | 7.0 - 8.5 | 1,521 | 50 | 10 | 26.1 | 9.0 | 26.0 | BSW |
| 235/45R18 | 94V | 540 A A | B665 | 8.0 | 7.5 - 9.0 | 1,477 | 44 | 10 | 26.3 | 9.3 | 26.6 | BSW |
| 245/45R18 | 96V | 540 A A | B758 | 8.0 | 7.5 - 9.0 | 1,565 | 44 | 10 | 26.7 | 9.6 | 26.2 | BSW |
| 225/50R18 | 95T | 540 A A | B599 | 7.0 | 6.0 - 8.0 | 1,521 | 44 | 10 | 26.9 | 9.2 | 25.3 | BSW |
| 235/50R18 | 97V | 540 A A | B759 | 7.5 | 6.5 - 8.5 | 1,609 | 44 | 10 | 27.3 | 9.7 | 26.2 | BSW |
| 225/55R18 | 98V | 540 A A | B666 | 7.0 | 6.0 - 8.0 | 1,653 | 44 | 10 | 27.8 | 9.2 | 27.1 | BSW |
| 235/55R18 | 100H | 540 A A | B537 | 7.5 | 6.5 - 8.5 | 1,764 | 44 | 10 | 28.1 | 9.6 | 28.3 | BSW |
| 225/60R18 | 100H | 540 A A | B524 | 6.5 | 6.0 - 8.0 | 1,764 | 44 | 10 | 28.6 | 9.0 | 27.3 | BSW |
| 235/60R18 | 103V | 540 A A | B760 | 7.0 | 6.5 - 8.5 | 1,929 | 44 | 10 | 29.1 | 9.5 | 29.3 | BSW |
| 245/60R18 | 105H | 540 A A | B761 | 7.0 | 7.0 - 8.5 | 2,039 | 44 | 10 | 29.6 | 9.8 | 31.3 | BSW |
| 235/65R18 | 106H | 540 A A | B762 | 7.0 | 6.5 - 8.5 | 2,094 | 44 | 10 | 30.0 | 9.5 | 30.1 | BSW |
| 245/45R19 | 102V XL | 540 A A | B763 | 8.0 | 7.5 - 9.0 | 1,874 | 50 | 10 | 27.7 | 9.6 | 27.8 | BSW |
| 255/50R19 | 107V XL | 540 A A | B764 | 8.0 | 7.0 - 9.0 | 2,149 | 50 | 10 | 29.1 | 10.4 | 30.8 | BSW |
| 225/55R19 | 99V | 540 A A | B765 | 7.0 | 6.0 - 8.0 | 1,709 | 44 | 10 | 28.8 | 9.2 | 28.2 | BSW |
| 235/55R19 | 101V | 540 A A | B766 | 7.5 | 6.5 - 8.5 | 1,819 | 44 | 10 | 29.2 | 9.7 | 28.0 | BSW |
| 245/45R20 | 99V | 540 A A | B767 | 8.0 | 7.5 - 9.0 | 1,709 | 44 | 10 | 28.7 | 9.6 | 27.2 | BSW |
| 245/50R20 | 102V | 540 A A | B768 | 7.5 | 7.0 - 8.5 | 1,874 | 44 | 10 | 29.7 | 10.0 | 29.1 | BSW |
| 235/55R20 | 102V | 540 A A | B769 | 7.5 | 6.5 - 8.5 | 1,874 | 44 | 10 | 30.1 | 9.5 | 29.7 | BSW |

LI Load Index SR Speed Rating XL Extra Load UTQG Uniform Tire Quality Grade BSW Black Side Wall

ADVENTURO HT

HIGHWAY ALL-SEASON

30
DAY

Test Drive

15 - 22 Inch 

Speed Rating: R/S/T/H/V 

45 - 85 Series 

UTQG: 600 A B UTQG

M+S Rated M+S

60K
50k

Limited Warranty
(60k for LT Sizes)



Handling



Comfort



Noise

Adventuro HT is designed with comfort and control in mind. The advanced tread design and robust 60,000 mile tread life warranty offer drivers the optimal balance of form and function. With features like full depth sipes, chamfered tread edges and a continuous center rib, you can drive with confidence and control. Dual sidewall designs also give you the ability to choose the perfect look for your vehicle.



FEATURES / BENEFITS

Full Depth Wave Sipes

Additional biting edges for improved wet and snow traction

Chamfered Tread Edges

Increased displacement of water to reduce the risk of hydroplaning

Dual Sidewall Design

Two choices for the perfect look

Continuous Center Rib

Improved braking performance and excellent stability at highway speeds

Harmonically Optimized Pitch Sequencing

Reduced road noise generation for a quieter ride

| Tire Size | LI / SR | UTQG | Item Number | Measuring Rim inch | Rim Width Range inch | Max. Load lbs | Max. Pressure psi | Tread Depth 32nd | Overall Diameter inch | Section Width inch | Weight lbs | Side Wall |
|------------|---------|---------|-------------|--------------------|----------------------|---------------|-------------------|------------------|-----------------------|--------------------|------------|-----------|
| P235/75R15 | 105T | 600 A B | 100UA3630 | 6.5 | 6.0 - 8.0 | 2,028 | 44 | 11 | 29.0 | 9.5 | 27.5 | BSW |
| P215/70R16 | 99T | 600 A B | 100UA3606 | 6.5 | 5.5 - 7.0 | 1,709 | 44 | 11 | 28.0 | 8.8 | 23.9 | BSW |
| P235/70R16 | 104T | 600 A B | 100UA3622 | 7.0 | 6.0 - 8.0 | 1,984 | 44 | 11 | 29.1 | 9.5 | 27.9 | BSW |
| P245/70R16 | 106T | 600 A B | 100UA3628 | 7.0 | 6.5 - 8.0 | 2,094 | 44 | 11 | 29.6 | 9.9 | 29.4 | BSW |
| P255/70R16 | 109T | 600 A B | 100UA3627 | 7.5 | 6.5 - 8.5 | 2,271 | 44 | 11 | 30.2 | 10.2 | 30.4 | BSW |
| P265/70R16 | 111T | 600 A B | 100UA3624 | 8.0 | 7.0 - 9.0 | 2,403 | 44 | 11 | 30.7 | 10.7 | 32.5 | BSW |
| P245/75R16 | 109T | 600 A B | 100UA3626 | 7.0 | 6.5 - 8.0 | 2,271 | 44 | 11 | 30.6 | 9.9 | 31.2 | BSW |
| P265/75R16 | 114T | 600 A B | 100UA3632 | 7.5 | 7.0 - 9.0 | 2,601 | 44 | 11 | 31.7 | 10.6 | 33.2 | BSW |
| P245/65R17 | 105T | 600 A B | 100UA3623 | 7.0 | 7.0 - 8.5 | 2,039 | 44 | 11 | 29.7 | 9.7 | 28.7 | BSW |
| P265/65R17 | 110T | 600 A B | AS124 | 8.0 | 7.5 - 9.5 | 2,337 | 44 | 11 | 30.6 | 10.7 | 34.9 | OWL |
| P245/70R17 | 108T | 600 A B | 100UA3625 | 7.0 | 6.5 - 8.0 | 2,205 | 44 | 11 | 30.7 | 9.8 | 31.1 | BSW |
| 255/70R17 | 112T | | | | | | | | | | | BSW |
| P265/70R17 | 113T | 600 A B | 100UA3621 | 8.0 | 7.0 - 9.0 | 2,535 | 44 | 11 | 31.7 | 10.8 | 34.2 | BSW |
| 255/55R18 | 109V XL | 600 A B | AS125 | 8.0 | 7.0 - 9.0 | 2,271 | 50 | 11 | 29.0 | 10.4 | 34.0 | BSW |
| P265/60R18 | 109T | 600 A B | AS126 | 8.0 | 7.5 - 9.5 | 2,271 | 44 | 11 | 30.5 | 10.7 | 35.0 | BSW |
| 255/65R18 | 111T | | | | | | | | | | | BSW |
| P265/65R18 | 112T | 600 A B | AS127 | 8.0 | 7.5 - 9.5 | 2,469 | 44 | 11 | 31.5 | 10.7 | 35.8 | OWL |
| P275/65R18 | 114T | 600 A B | AS128 | 8.0 | 7.5 - 9.5 | 2,601 | 44 | 11 | 32.1 | 11.0 | 38.0 | BSW |
| P255/70R18 | 112T | 600 A B | AS129 | 7.5 | 6.5 - 8.5 | 2,469 | 44 | 11 | 32.1 | 10.2 | 35.0 | BSW |
| P265/70R18 | 114T | 600 A B | AS130 | 8.0 | 7.0 - 9.0 | 2,601 | 44 | 11 | 32.6 | 10.7 | 38.2 | OWL |
| P245/55R19 | 103T | 600 A B | AS131 | 7.5 | 7.0 - 8.5 | 1,929 | 44 | 11 | 29.7 | 10.0 | 33.0 | BSW |
| P255/60R19 | 108H | 600 A B | AS132 | 7.5 | 7.0 - 9.0 | 2,205 | 44 | 11 | 31.1 | 10.2 | 34.6 | BSW |
| 255/50R20 | 105H | 600 A B | AS133 | 8.0 | 7.0 - 9.0 | 2,039 | 44 | 11 | 30.1 | 10.4 | 34.4 | BSW |
| 265/50R20 | 107T | 600 A B | AS134 | 8.5 | 7.5 - 9.5 | 2,150 | 44 | 11 | 30.5 | 10.9 | 36.4 | BSW |
| P255/55R20 | 107H | 600 A B | AS135 | 8.0 | 7.0 - 9.0 | 2,149 | 44 | 11 | 31.0 | 10.4 | 36.6 | BSW |
| P275/55R20 | 111H | 600 A B | 100UA3601 | 8.5 | 7.5 - 9.5 | 2,403 | 44 | 11 | 31.9 | 11.2 | 36.5 | BSW |
| P275/60R20 | 114H | 600 A B | AS136 | 8.0 | 7.5 - 9.5 | 2,601 | 44 | 11 | 33.0 | 11.0 | 39.2 | BSW |
| 285/45R22 | 114H | | | | | | | | | | | BSW |

| Tire Size | LI / SR (s/d) | LR / PR | Item Number | Measuring Rim inch | Rim Width Range inch | Max. Load (s/d) lbs | Max. Pressure psi | Tread Depth 32nd | Overall Diameter inch | Section Width inch | Weight lbs | Side Wall |
|-------------|---------------|---------|-------------|--------------------|----------------------|---------------------|-------------------|------------------|-----------------------|--------------------|------------|-----------|
| LT225/75R16 | 115/112S | E / 10 | AS137 | 6.0 | 6.0 - 7.0 | 2,680/2,470 | 80 | 13 | 29.3 | 8.8 | 37.3 | BSW |
| LT245/75R16 | 120/116S | E / 10 | AS138 | 7.0 | 6.5 - 8.0 | 3,042/2,778 | 80 | 13 | 30.5 | 9.8 | 41.8 | BSW |
| LT265/75R16 | 123/120S | E / 10 | AS139 | 7.5 | 7.0 - 8.0 | 3,415/3,085 | 80 | 13 | 31.7 | 10.5 | 47.5 | OWL |
| LT235/85R16 | 120/116S | E / 10 | AS140 | 6.5 | 6.0 - 7.5 | 3,042/2,778 | 80 | 13 | 31.7 | 9.3 | 42.9 | BSW |
| LT265/70R17 | 121/118S | E / 10 | AS141 | 8.0 | 7.0 - 8.5 | 3,195/2,910 | 80 | 13 | 31.7 | 10.7 | 47.6 | OWL |
| LT245/75R17 | 121/118S | E / 10 | AS142 | 7.0 | 6.5 - 7.5 | 3,195/2,910 | 80 | 13 | 31.5 | 9.8 | 44.4 | BSW |
| LT235/80R17 | 120/117R | E / 10 | AS143 | 6.5 | 6.0 - 7.5 | 3,085/2,835 | 80 | 13 | 31.8 | 9.3 | 42.8 | BSW |

LI Load Index SR Speed Rating XL Extra Load UTQG Uniform Tire Quality Grade (s/d) Single/Dual LR Load Range PR Ply Rating BSW Black Side Wall OWL Outline White Letter

SPECIFICATIONS NOT FINAL

SAVERO HT2

HIGHWAY ALL-SEASON

30 DAY

Test Drive

15 - 20 Inch 

Speed Rating: R / S / T / H / V 

45 - 85 Series 

UTQG: 520 A B UTQG

M+S Rated **M+S**

50k

Limited
Warranty



Comfort



Noise

Savero HT2 is an all season highway light truck and SUV tire. Active drivers will benefit from the superior pattern design that brings unparalleled handling and control in wet and dry conditions.

FEATURES / BENEFITS

Advanced Tread Design

Excellent handling and ride comfort

Carcass Tension Technology

Ensures balance of dry and wet handling

Noise Canceling Tread

Advanced tread block design effectively reduces road noise

All-Season Compound

Outstanding grip and stability



| Tire Size | LI / SR | UTQG | Item Number | Measuring Rim inch | Rim Width Range inch | Max. Load lbs | Max. Pressure psi | Tread Depth 32nd | Overall Diameter inch | Section Width inch | Weight lbs | Side Wall |
|------------|---------|---------|-------------|--------------------|----------------------|---------------|-------------------|------------------|-----------------------|--------------------|------------|-----------|
| P215/70R15 | 97S | 520 A B | B452 | 6.5 | 5.5 - 7.0 | 1,620 | 44 | 10 | 26.9 | 8.7 | 24.4 | BSW |
| P235/75R15 | 105T | 520 A B | B443 | 6.5 | 6.0 - 8.0 | 2,028 | 44 | 10 | 28.9 | 9.3 | 29.0 | OWL |
| P255/65R16 | 106S | 520 A B | B459 | 7.5 | 7.0 - 9.0 | 2,094 | 44 | 10 | 29.1 | 10.2 | 31.8 | BSW |
| P215/70R16 | 99T | 520 A B | B448 | 6.5 | 5.5 - 7.0 | 1,709 | 44 | 10 | 27.9 | 8.7 | 25.4 | BSW |
| P225/70R16 | 101T | 520 A B | B462 | 6.5 | 6.0 - 7.5 | 1,819 | 44 | 10 | 28.4 | 9.0 | 28.0 | OWL |
| P235/70R16 | 104T | 520 A B | B447 | 7.0 | 6.0 - 8.0 | 1,984 | 44 | 10 | 29.0 | 9.4 | 29.4 | OWL |
| P245/70R16 | 106T | 520 A B | B445 | 7.0 | 6.5 - 8.0 | 2,094 | 44 | 10 | 29.5 | 9.8 | 31.3 | OWL |
| P255/70R16 | 109T | 520 A B | B433 | 7.5 | 6.5 - 8.5 | 2,271 | 44 | 10 | 30.1 | 10.2 | 32.8 | OWL |
| P265/70R16 | 111T | 520 A B | B444 | 8.0 | 7.0 - 9.0 | 2,403 | 44 | 10 | 30.6 | 10.7 | 34.9 | OWL |
| P225/75R16 | 106S XL | 520 A B | B549 | 6.0 | 6.0 - 7.5 | 2,094 | 50 | 10 | 29.3 | 8.8 | 29.7 | OWL |
| P235/75R16 | 106T | 520 A B | B451 | 6.5 | 6.5 - 8.0 | 2,094 | 44 | 10 | 29.8 | 9.3 | 31.6 | BSW |
| P245/75R16 | 109T | 520 A B | B461 | 7.0 | 6.5 - 8.0 | 2,271 | 44 | 10 | 30.5 | 9.8 | 33.4 | OWL |
| P265/75R16 | 114T | 520 A B | B436 | 7.5 | 7.0 - 9.0 | 2,601 | 44 | 10 | 31.7 | 10.5 | 36.4 | OWL |
| P275/60R17 | 110T | 520 A B | B437 | 8.0 | 7.5 - 9.5 | 2,337 | 44 | 10 | 30.0 | 11.0 | 34.8 | OWL |
| 225/65R17 | 102H | 520 A B | B538 | 6.5 | 6.0 - 8.0 | 1,874 | 44 | 10 | 28.5 | 9.0 | 27.7 | BSW |
| P235/65R17 | 103T | 520 A B | B460 | 7.0 | 6.5 - 8.5 | 1,929 | 44 | 10 | 29.1 | 9.4 | 28.7 | BSW |
| P245/65R17 | 105T | 520 A B | B455 | 7.0 | 7.0 - 8.5 | 2,039 | 44 | 10 | 29.5 | 9.8 | 30.5 | BSW |
| P255/65R17 | 108S | 520 A B | B454 | 7.5 | 7.0 - 9.0 | 2,205 | 44 | 10 | 30.1 | 10.2 | 32.0 | BSW |
| P265/65R17 | 110T | 520 A B | B440 | 8.0 | 7.5 - 9.5 | 2,337 | 44 | 10 | 30.6 | 10.7 | 34.9 | OWL |
| P235/70R17 | 108S XL | 520 A B | B438 | 7.0 | 6.0 - 8.0 | 2,205 | 50 | 10 | 30.0 | 9.4 | 31.5 | OWL |
| P245/70R17 | 108T | 520 A B | B449 | 7.0 | 6.5 - 8.0 | 2,205 | 44 | 10 | 30.6 | 9.8 | 32.6 | OWL |
| P265/70R17 | 113T | 520 A B | B430 | 8.0 | 7.0 - 9.0 | 2,535 | 44 | 10 | 31.7 | 10.7 | 35.6 | OWL |
| 255/55R18 | 109V XL | 520 A B | B543 | 8.0 | 7.0 - 9.0 | 2,271 | 50 | 10 | 29.0 | 10.4 | 34.7 | BSW |
| 235/60R18 | 107V XL | 520 A B | B540 | 7.0 | 6.5 - 8.5 | 2,149 | 50 | 10 | 29.1 | 9.4 | 30.7 | BSW |
| P245/60R18 | 104T | 520 A B | B442 | 7.0 | 7.0 - 8.5 | 1,984 | 44 | 10 | 29.6 | 9.8 | 31.4 | BSW |
| P265/60R18 | 109T | 520 A B | B463 | 8.0 | 7.5 - 9.5 | 2,271 | 44 | 10 | 30.5 | 10.7 | 35.1 | OWL |
| P235/65R18 | 104T | 520 A B | B435 | 7.0 | 6.5 - 8.5 | 1,984 | 44 | 10 | 30.0 | 9.4 | 31.9 | OWL |
| 255/65R18 | 111T | 520 A B | B750 | 7.5 | 7.0 - 9.0 | 2,271 | 44 | 10 | 31.1 | 10.2 | 33.8 | BSW |
| P265/65R18 | 112S | 520 A B | B548 | 8.0 | 7.5 - 9.5 | 2,469 | 44 | 10 | 31.5 | 10.7 | 36.0 | OWL |
| P275/65R18 | 114T | 520 A B | B541 | 8.0 | 7.5 - 9.5 | 2,601 | 44 | 10 | 32.1 | 11.0 | 38.1 | BSW |
| P255/70R18 | 112T | 520 A B | B441 | 7.5 | 6.5 - 8.5 | 2,469 | 44 | 10 | 32.1 | 10.2 | 35.0 | BSW |
| P265/70R18 | 114S | 520 A B | B545 | 8.0 | 7.0 - 9.0 | 2,601 | 44 | 10 | 32.6 | 10.7 | 38.2 | OWL |
| P245/55R19 | 103S | 520 A B | B542 | 7.5 | 7.0 - 8.5 | 1,929 | 44 | 10 | 29.6 | 10.0 | 33.0 | BSW |
| P255/60R19 | 108H | 520 A B | B751 | 7.5 | 7.0 - 9.0 | 2,205 | 44 | 10 | 31.1 | 10.2 | 33.8 | BSW |
| 275/45R20 | 110V XL | 520 A B | B550 | 9.0 | 8.5 - 10.5 | 2,337 | 50 | 10 | 29.8 | 10.7 | 35.4 | BSW |
| 255/50R20 | 105H | 520 A B | B621 | 8.0 | 7.0 - 9.0 | 2,039 | 44 | 10 | 30.1 | 10.4 | 35.0 | BSW |
| 265/50R20 | 107V | 520 A B | B752 | 8.5 | 8.0 - 9.0 | 2,150 | 44 | 11 | 30.5 | 10.9 | 36.4 | BSW |
| P255/55R20 | 107H | 520 A B | B753 | 8 | 7.0 - 9.0 | 2,419 | 44 | 10 | 31.0 | 10.4 | 36.6 | BSW |
| P275/55R20 | 111H | 520 A B | B539 | 8.5 | 7.5 - 9.5 | 2,403 | 44 | 10 | 31.9 | 11.2 | 39.3 | BSW |
| P275/60R20 | 114S | 520 A B | B432 | 8.0 | 7.5 - 9.5 | 2,601 | 44 | 10 | 33.0 | 11.0 | 39.0 | OWL |

| Tire Size | LI / SR (s/d) | LR / PR | Item Number | Measuring Rim inch | Rim Width Range inch | Max. Load (s/d) lbs | Max. Pressure psi | Tread Depth 32nd | Overall Diameter inch | Section Width inch | Weight lbs | Side Wall |
|---------------|---------------|---------|-------------|--------------------|----------------------|---------------------|-------------------|------------------|-----------------------|--------------------|------------|-----------|
| 30X9.50R15LT | 104R | C / 6 | B458 | 7.5 | 6.5 - 8.5 | 1,985 | 50 | 13 | 29.5 | 9.4 | 35.9 | OWL |
| 31X10.50R15LT | 109R | C / 6 | B446 | 8.5 | 7.0 - 9.0 | 2,270 | 50 | 13 | 30.5 | 10.6 | 40.8 | OWL |
| LT235/75R15 | 104/101R | C / 6 | B453 | 6.5 | 6.0 - 7.0 | 1,985/1,820 | 50 | 13 | 28.9 | 9.3 | 35.7 | OWL |
| LT225/75R16 | 115/112R | E / 10 | B457 | 6.0 | 6.0 - 7.0 | 2,680/2,470 | 80 | 13 | 29.3 | 8.8 | 37.4 | BSW |
| LT245/75R16 | 120/116S | E / 10 | B456 | 7.0 | 6.5 - 8.0 | 3,042/2,778 | 80 | 13 | 30.5 | 9.8 | 42.7 | OWL |
| LT265/75R16 | 123/120R | E / 10 | B434 | 7.5 | 7.0 - 8.0 | 3,415/3,085 | 80 | 13 | 31.7 | 10.5 | 47.5 | OWL |
| LT215/85R16 | 115/112R | E / 10 | B544 | 6.0 | 5.5 - 7.0 | 2,680/2,470 | 80 | 13 | 30.4 | 8.5 | 38.5 | BSW |
| LT235/85R16 | 120/116R | E / 10 | B450 | 6.5 | 6.0 - 7.5 | 3,042/2,778 | 80 | 13 | 31.7 | 9.3 | 42.9 | BSW |
| LT245/70R17 | 119/116R | E / 10 | B439 | 7.0 | 6.5 - 8.0 | 3,000/2,755 | 80 | 13 | 30.6 | 9.8 | 41.4 | BSW |
| LT265/70R17 | 121/118R | E / 10 | B431 | 8.0 | 7.0 - 8.5 | 3,195/2,910 | 80 | 13 | 31.7 | 10.7 | 46.9 | OWL |
| LT245/75R17 | 121/118S | E / 10 | B547 | 7.0 | 6.5 - 7.5 | 3,195/2,910 | 80 | 13 | 31.5 | 9.8 | 44.4 | BSW |
| LT235/80R17 | 120/117R | E / 10 | B546 | 6.5 | 6.0 - 7.5 | 3,085/2,835 | 80 | 13 | 31.8 | 9.3 | 42.8 | BSW |

LI Load Index SR Speed Rating XL Extra Load UTQG Uniform Tire Quality Grade (s/d) Single/Dual LR Load Range PR Ply Rating BSW Black Side Wall OWL Outline White Letter

ADVENTURO ATX

ON / OFF ROAD ALL-TERRAIN

30 DAY

Test Drive

15 - 18 / 20 Inch 

Speed Rating: R / S / T / H 

55 - 80 Series 

UTQG: 520 A B 

M+S Rated 

50k

Limited Warranty
(P-Metric Only)



3PMS



Handling



Comfort



On / Off Road

The Adventuro ATX offers excellent balance between on and off road performance. With a Three-Peak Mountain Snowflake (3PMS) rating, the ATX is your solution for improved traction in winter conditions. The sidewall cleats and stair step grooves are designed to deliver premium off-road performance, while a cut and chip resistant compound ensures the integrity of the tread is not compromised. The Adventuro ATX—aggressively refined.

FEATURES / BENEFITS

Sidewall Cleats

Additional grip in deep soil and on loose surfaces

Interlocked Center Rib

Dependable on-road handling and stability

Wide Shoulder Channels

Improved performance on wet roads

Stair Step Grooves

Enhanced off-road traction

Three-Peak Mountain Snowflake (3PMS) Rating

Improved snow traction over a standard all-season rated tire



ON / OFF ROAD ALL-TERRAIN **ADVENTURO ATX**

| Tire Size | LI / SR | UTQG | Item Number | Measuring Rim inch | Rim Width Range inch | Max. Load lbs | Max. Pressure psi | Tread Depth 32nd | Overall Diameter inch | Section Width inch | Weight lbs | Side Wall |
|------------|---------|---------|-------------|--------------------|----------------------|---------------|-------------------|------------------|-----------------------|--------------------|------------|-----------|
| P235/75R15 | 108S XL | 520 A B | 100UA3700 | 6.5 | 6.0 - 8.0 | 2,183 | 50 | 13 | 29.1 | 9.5 | 30.2 | BSW |
| P235/70R16 | 104T | 520 A B | 100UA3723 | 7.0 | 6.0 - 8.0 | 1,984 | 44 | 13 | 29.2 | 9.6 | 29.9 | BSW |
| P245/70R16 | 106T | 520 A B | 100UA3724 | 7.0 | 6.5 - 8.0 | 2,094 | 44 | 13 | 29.8 | 9.8 | 31.8 | BSW |
| P255/70R16 | 109T | 520 A B | 100UA3725 | 7.5 | 6.5 - 8.5 | 2,271 | 44 | 13 | 30.3 | 10.2 | 34.9 | BSW |
| P265/70R16 | 111T | 520 A B | 100UA3702 | 8.0 | 7.0 - 9.0 | 2,403 | 44 | 13 | 30.9 | 10.7 | 36.4 | BSW |
| P245/75R16 | 109T | 520 A B | 100UA3701 | 7.0 | 6.0 - 8.0 | 2,271 | 44 | 13 | 30.8 | 10.0 | 34.1 | BSW |
| P265/75R16 | 114T | 520 A B | 100UA3726 | 7.5 | 7.0 - 9.0 | 2,601 | 44 | 13 | 31.9 | 10.6 | 37.1 | BSW |
| P245/65R17 | 105T | 520 A B | 100UA3704 | 7.0 | 7.0 - 8.5 | 2,039 | 44 | 13 | 29.8 | 9.6 | 31.2 | BSW |
| P265/70R17 | 113T | 520 A B | 100UA3706 | 8.0 | 7.0 - 9.0 | 2,535 | 44 | 13 | 31.9 | 10.8 | 38.3 | BSW |
| 265/60R18 | 110H | 520 A B | 100UA3707 | 8.0 | 7.5 - 9.5 | 2,337 | 44 | 13 | 30.7 | 10.7 | 36.1 | BSW |
| 265/65R18 | 114T | 520 A B | 100UA3708 | 8.0 | 7.5 - 9.5 | 2,601 | 44 | 13 | 31.8 | 10.6 | 38.4 | BSW |
| 275/65R18 | 116T | 520 A B | AS151 | 8.0 | 7.5 - 9.5 | 2,756 | 44 | 13 | 32.1 | 11.0 | 39.2 | BSW |
| P275/55R20 | 111H | 520 A B | 100UA3711 | 8.5 | 7.5 - 9.5 | 2,403 | 44 | 13 | 32.2 | 11.2 | 40.0 | BSW |
| P275/60R20 | 114H | 520 A B | 100UA3727 | 8.0 | 7.5 - 9.5 | 1,180 | 44 | 13 | 33.0 | 11.0 | 40.9 | BSW |

| Tire Size | LI / SR (s/d) | LR / PR | Item Number | Measuring Rim inch | Rim Width Range inch | Max. Load (s/d) lbs | Max. Pressure psi | Tread Depth 32nd | Overall Diameter inch | Section Width inch | Weight lbs | Side Wall |
|---------------|---------------|---------|-------------|--------------------|----------------------|---------------------|-------------------|------------------|-----------------------|--------------------|------------|-----------|
| 31x10.50R15 | 109S | C / 6 | AS154 | 8.5 | 7.0 - 9.0 | 2,270 | 50 | 16 | 30.5 | 10.6 | 40.9 | OWL |
| LT245/75R16 | 120/116S | E / 10 | AS153 | 7.0 | 6.5 - 8.0 | 3,042/2,778 | 80 | 16 | 30.5 | 9.8 | 42.7 | OWL |
| LT265/75R16 | 123/120S | E / 10 | AS152 | 7.5 | 7.0 - 8.0 | 3,415/3,085 | 80 | 16 | 31.7 | 10.5 | 48.5 | OWL |
| LT285/75R16 | 126/123R | E / 10 | AS155 | 8.0 | 7.5 - 9.0 | 3,750/3,415 | 80 | 16 | 32.8 | 11.3 | 51.4 | OWL |
| LT265/70R17 | 121/118S | E / 10 | AS150 | 8.0 | 7.0 - 8.5 | 3,195/2,910 | 80 | 16 | 31.7 | 10.7 | 48.1 | OWL |
| LT285/70R17 | 121/118S | E / 10 | AS158 | 8.5 | 7.5 - 9.0 | 3,195/2,910 | 80 | 16 | 32.8 | 11.5 | 52.8 | OWL |
| LT245/75R17 | 121/118S | E / 10 | AS156 | 7.0 | 6.5 - 7.5 | 3,195/2,910 | 80 | 16 | 31.5 | 9.8 | 46.1 | OWL |
| LT235/80R17 | 120/117S | E / 10 | AS157 | 6.5 | 6.0 - 7.5 | 3,085/2,835 | 80 | 16 | 31.8 | 9.3 | 44.0 | OWL |
| LT275/65R18 | 123/120S | E / 10 | AS159 | 8.0 | 7.5 - 9.0 | 3,415/3,085 | 80 | 16 | 32.1 | 11.0 | 49.9 | OWL |
| LT265/70R18 | 124/121S | E / 10 | AS160 | 8.0 | 7.0 - 9.0 | 3,525/3,195 | 80 | 16 | 32.6 | 10.5 | 52.3 | OWL |
| LT275/70R18 | 125/122S | E / 10 | AS161 | 8.0 | 7.0 - 8.5 | 3,640/3,305 | 80 | 16 | 33.2 | 11.0 | 52.0 | OWL |
| LT275/65R20 | 126/123S | E / 10 | AS162 | 8.0 | 7.5 - 9.5 | 3,750/3,415 | 80 | 16 | 34.1 | 10.5 | 59.5 | OWL |
| 35x12.50R20LT | 121R | E / 10 | AS163 | 10.0 | 8.5 - 11.0 | 3,195 | 65 | 16 | 34.5 | 12.5 | 64.8 | OWL |

LI Load Index **SR** Speed Rating **XL** Extra Load **UTQG** Uniform Tire Quality Grade **(s/d)** Single/Dual **LR** Load Range **PR** Ply Rating **BSW** Black Side Wall **OWL** Outline White Letter

ADVENTURO AT³

ON / OFF ROAD ALL-TERRAIN

30DAY

Test Drive

15 - 18 / 20 Inch 

Speed Rating: R / S / T / H 

55 - 85 Series 

UTQG: 520 A B UTQG

M+S Rated **M+S**

50k

Limited Warranty
(P-Metric Only)



Handling



Comfort



On / Off Road

Adventuro AT³ is an all-terrain tire for pickup and SUV drivers wanting aggressive looks and civilized on-road manners. The enhanced tread compound and dual-purpose tread design provides excellent handling, wet grip and a comfortable ride and is backed by a 50,000 mile tread life warranty. Superb off-road capabilities are maintained with features that provide stability and grip on soft and loose surfaces as well as a self-cleaning tread design.

FEATURES / BENEFITS

Dual-Purpose Tread Design

Balanced on-road and off-road performance

Interlocked Center Rib

Superior handling, stability and grip on both soft and loose surfaces

Five-Pitch Technology

Reduced tire noise

3D Chamfered-Edge Grooves

Self-cleaning tread design for off-road performance

Enhanced Compound

Provides wet and dry grip, longer tread life and improved cut/chip resistance



| Tire Size | LI / SR | UTQG | Item Number | Measuring Rim inch | Rim Width Range inch | Max. Load lbs | Max. Pressure psi | Tread Depth 32nd | Overall Diameter inch | Section Width inch | Weight lbs | Side Wall |
|------------|---------|---------|-------------|--------------------|----------------------|---------------|-------------------|------------------|-----------------------|--------------------|------------|-----------|
| P235/75R15 | 105S | 520 A B | AS087 | 6.5 | 6.0 - 8.0 | 2,028 | 44 | 13 | 28.9 | 9.3 | 30.2 | OWL |
| P235/70R16 | 104T | 520 A B | AS081 | 7.0 | 6.0 - 8.0 | 1,984 | 44 | 13 | 29.0 | 9.5 | 30.9 | OWL |
| P265/70R16 | 111T | 520 A B | AS079 | 8.0 | 7.0 - 9.0 | 2,403 | 44 | 13 | 30.6 | 10.7 | 34.8 | OWL |
| P245/75R16 | 109T | 520 A B | AS083 | 7.0 | 6.0 - 8.0 | 2,271 | 44 | 13 | 30.5 | 9.8 | 33.9 | OWL |
| P245/65R17 | 105T | 520 A B | AS082 | 7.0 | 7.0 - 8.5 | 2,039 | 44 | 13 | 29.5 | 9.8 | 31.8 | OWL |
| P265/65R17 | 110T | 520 A B | AS085 | 8.0 | 7.5 - 9.5 | 2,337 | 44 | 13 | 30.6 | 10.7 | 34.4 | OWL |
| P245/70R17 | 108T | 520 A B | AS084 | 7.0 | 6.5 - 8.0 | 2,205 | 44 | 13 | 30.6 | 9.8 | 33.7 | OWL |
| P265/70R17 | 113T | 520 A B | AS077 | 8.0 | 7.0 - 9.0 | 2,535 | 44 | 13 | 31.7 | 10.7 | 36.9 | OWL |
| P285/70R17 | 117T | 520 A B | AS091 | 8.5 | 7.5 - 9.5 | 2,833 | 44 | 13 | 32.8 | 11.5 | 42.4 | OWL |
| P235/75R17 | 108S | 520 A B | AS089 | 6.5 | 6.0 - 8.0 | 2,205 | 44 | 13 | 30.9 | 9.3 | 33.2 | OWL |
| P265/60R18 | 109T | 520 A B | AS088 | 8.0 | 7.5 - 9.5 | 2,271 | 44 | 13 | 30.5 | 10.7 | 35.8 | OWL |
| P265/65R18 | 112S | 520 A B | AS086 | 8.0 | 7.5 - 9.5 | 2,469 | 44 | 13 | 31.5 | 10.7 | 36.3 | OWL |
| P275/65R18 | 114T | 520 A B | AS078 | 8.0 | 7.5 - 9.5 | 2,601 | 44 | 13 | 32.1 | 11.0 | 39.2 | OWL |
| P265/70R18 | 114S | 520 A B | AS090 | 8.0 | 7.0 - 9.0 | 2,601 | 44 | 13 | 32.6 | 10.7 | 38.3 | OWL |
| P275/55R20 | 111H | 520 A B | AS080 | 8.5 | 7.5 - 9.5 | 2,403 | 44 | 13 | 31.9 | 11.2 | 39.8 | BSW |

| Tire Size | LI / SR (s/d) | LR / PR | Item Number | Measuring Rim inch | Rim Width Range inch | Max. Load (s/d) lbs | Max. Pressure psi | Tread Depth 32nd | Overall Diameter inch | Section Width inch | Weight lbs | Side Wall |
|---------------|---------------|---------|-------------|--------------------|----------------------|---------------------|-------------------|------------------|-----------------------|--------------------|------------|-----------|
| 31X10.50R15LT | 109S | C / 6 | AS093 | 8.5 | 7.0 - 9.0 | 2,270 | 50 | 16 | 30.5 | 10.6 | 40.9 | OWL |
| LT245/75R16 | 120/116S | E / 10 | AS101 | 7.0 | 6.5 - 8.0 | 3,042/2,778 | 80 | 16 | 30.5 | 9.8 | 42.7 | OWL |
| LT265/75R16 | 123/120S | E / 10 | AS092 | 7.5 | 7.0 - 8.0 | 3,415/3,085 | 80 | 16 | 31.7 | 10.5 | 48.5 | OWL |
| LT285/75R16 | 126/123R | E / 10 | AS094 | 8.0 | 7.5 - 9.0 | 3,750/3,415 | 80 | 16 | 32.8 | 11.3 | 51.4 | OWL |
| LT215/85R16 | 115/112S | E / 10 | AS104 | 6.0 | 5.5 - 7.0 | 2,680/2,470 | 80 | 16 | 30.4 | 8.5 | 39.8 | OWL |
| LT235/85R16 | 120/116S | E / 10 | AS099 | 6.5 | 6.0 - 7.5 | 3,042/2,778 | 80 | 16 | 31.7 | 9.3 | 44.9 | BSW |
| LT245/70R17 | 119/116S | E / 10 | AS103 | 7.0 | 6.5 - 8.0 | 3,000/2,755 | 80 | 16 | 30.6 | 9.8 | 44.0 | OWL |
| LT265/70R17 | 121/118S | E / 10 | AS102 | 8.0 | 7.0 - 8.5 | 3,195/2,910 | 80 | 16 | 31.7 | 10.7 | 48.1 | OWL |
| LT285/70R17 | 121/118S | E / 10 | AS095 | 8.5 | 7.5 - 9.0 | 3,195/2,910 | 80 | 16 | 32.8 | 11.5 | 52.8 | OWL |
| LT245/75R17 | 121/118S | E / 10 | AS097 | 7.0 | 6.5 - 7.5 | 3,195/2,910 | 80 | 16 | 31.5 | 9.8 | 46.1 | OWL |
| LT235/80R17 | 120/117S | E / 10 | AS100 | 6.5 | 6.0 - 7.5 | 3,085/2,835 | 80 | 16 | 31.8 | 9.3 | 44.0 | OWL |
| LT275/65R18 | 123/120S | E / 10 | AS098 | 8.0 | 7.5 - 9.0 | 3,415/3,085 | 80 | 16 | 32.1 | 11.0 | 49.9 | OWL |
| LT285/65R18 | 125/122S | E / 10 | AS105 | 8.5 | 8.0 - 10.0 | 3,640/3,305 | 80 | 16 | 32.6 | 11.5 | 51.4 | OWL |
| LT275/70R18 | 125/122S | E / 10 | AS096 | 8.0 | 7.0 - 8.5 | 3,640/3,305 | 80 | 16 | 33.2 | 11.0 | 52.0 | OWL |

LI Load Index **SR** Speed Rating **XL** Extra Load **UTQG** Uniform Tire Quality Grade **(s/d)** Single/Dual **LR** Load Range **PR** Ply Rating **BSW** Black Side Wall **OWL** Outline White Letter

MAXMILER Pro

COMMERCIAL VAN ALL-SEASON

15 - 17 Inch 

Speed Rating: Q / R / T / H 

55 - 65 / 75 - 85 Series 

UTQG: 700 A A UTQG

M+S Rated **M+S**



Noise



Durability



Stability

Maxmiler Pro is designed for today's light commercial vehicles like Ford Transit, Nissan NV and RAM ProMaster. The durable reinforced sidewall is built to carry the heavy loads of compact and full-size multi-purpose vans. The tread pattern delivers all-season performance for highway use with the toughness needed for some off-road driving near the jobsite. Maxmiler Pro—your partner in business to get the job done.

FEATURES / BENEFITS

Square Footprint

Even pressure distribution which resists irregular wear and improves tire mileage

Large Siped Shoulder Blocks

Improved stability, braking and wet/dry grip

Wide Tread Grooves

Enhanced water evacuation for excellent hydroplaning resistance

Reinforced Sidewall

Heavy load carrying capacity for commercial multi-purpose vans

Low Rolling Resistance

Reduced fuel consumption



COMMERCIAL VAN ALL-SEASON **MAXMILER Pro**

| Tire Size | LI / SR | UTQG | Item Number | Measuring Rim inch | Rim Width Range inch | Max. Load lbs | Max. Pressure psi | Tread Depth 32nd | Overall Diameter inch | Section Width inch | Weight lbs | Side Wall |
|------------|---------|---------|-------------|--------------------|----------------------|---------------|-------------------|------------------|-----------------------|--------------------|------------|-----------|
| P205/65R15 | 95T XL | 700 A A | B624 | 6.0 | 5.5 - 7.5 | 1,521 | 50 | 11 | 25.5 | 8.2 | 24.0 | BSW |
| 215/55R16 | 97H XL | 700 A A | B625 | 7.0 | 6.0 - 7.5 | 1,609 | 50 | 11 | 25.3 | 8.9 | 24.3 | BSW |

| Tire Size | LI / SR (s/d) | LR / PR | Item Number | Measuring Rim inch | Rim Width Range inch | Max. Load (s/d) lbs | Max. Pressure psi | Tread Depth 32nd | Overall Diameter inch | Section Width inch | Weight lbs | Side Wall |
|-------------|---------------|---------|-------------|--------------------|----------------------|---------------------|-------------------|------------------|-----------------------|--------------------|------------|-----------|
| 185/60R15C | 94/92T | - | B623 | 5.5 | 5.5 - 6.0 | 1,475/1,390 | 55 | 12 | 23.7 | 7.4 | 21.4 | BSW |
| 235/65R16C | 121/119R | - | B626 | 7.0 | 6.5 - 7.5 | 3,195/3,000 | 85 | 13 | 28.0 | 9.4 | 38.1 | BSW |
| 225/75R16C | 121/120R | - | B627 | 6.0 | 6.0 - 7.0 | 3,195/3,085 | 85 | 13 | 29.3 | 8.8 | 38.1 | BSW |
| LT245/75R16 | 120/116Q E | E / 10 | B631 | 7.0 | 6.5 - 8.0 | 3,042/2,778 | 80 | 14 | 30.5 | 9.8 | 44.3 | BSW |
| LT215/85R16 | 115/112Q E | E / 10 | B628 | 6.0 | 5.5 - 7.0 | 2,680/2,470 | 80 | 13 | 30.4 | 8.7 | 39.9 | BSW |
| LT235/85R16 | 120/116R E | E / 10 | B630 | 6.5 | 6.0 - 7.5 | 3,042/2,778 | 80 | 13 | 31.7 | 9.3 | 45.0 | BSW |
| LT245/75R17 | 121/118R E | E / 10 | B632 | 7.0 | 6.5 - 7.5 | 3,195/2,910 | 80 | 14 | 31.5 | 9.8 | 46.3 | BSW |
| LT235/80R17 | 120/117R E | E / 10 | B629 | 6.5 | 6.0 - 7.5 | 3,085/2,835 | 80 | 13 | 31.8 | 9.3 | 44.8 | BSW |

LI Load Index **SR** Speed Rating **XL** Extra Load **UTQG** Uniform Tire Quality Grade **(s/d)** Single/Dual **LR** Load Range **PR** Ply Rating **BSW** Black Side Wall

MAXMILER ST

TRAILER SERVICE

13 - 16 Inch 

Speed Rating: M 

75 - 85 Series 

M+S Rated 



Durability



Stability

Maxmiler ST is specifically made for trailer applications. It features sturdy sidewall construction to help reduce trailer sway and enhance load carrying capacity for stable and reliable towing. The robust full width tread design increases contact with the road for better braking performance. Dual steel belts in the tread also enhance handling, stability and puncture resistance.

FEATURES / BENEFITS

Full Width Tread

Improved road contact, strong grip and better braking performance

High Modulus Steel Belts

Enhanced handling, stability and puncture resistance

Robust Shoulder Blocks

Increased traction and stability

High-Tech Polyester Casing

Greater durability and reduced trailer sway


Jointless Nylon Edge Plies

Increased strength and treadwear






| Tire Size | LI / SR (s/d) | LR / PR | Item Number | Measuring Rim inch | Rim Width Range inch | Max. Load (s/d) lbs | Max. Pressure psi | Tread Depth 32nd | Overall Diameter inch | Section Width inch | Weight lbs | Side Wall |
|-------------|---------------|---------|-------------|--------------------|----------------------|---------------------|-------------------|------------------|-----------------------|--------------------|------------|-----------|
| ST175/80R13 | 91/87M | C / 6 | 100A2778 | 5.0 | 4.5 - 5.5 | 1,360/1,200 | 50 | 10 | 24.0 | 7.0 | 16.6 | BSW |
| ST205/75R14 | 100/96M | C / 6 | 100A2779 | 5.5 | 5.0 - 6.0 | 1,760/1,570 | 50 | 10 | 26.1 | 8.0 | 22.5 | BSW |
| ST215/75R14 | 102/98M | C / 6 | 100A2781 | 6.0 | 5.5 - 7.0 | 1,870/1,650 | 50 | 11 | 26.7 | 8.5 | 24.3 | BSW |
| ST205/75R15 | 107/102M | D / 8 | 100A2780 | 5.5 | 5.0 - 6.5 | 2,150/1,870 | 65 | 10 | 27.1 | 8.0 | 24.8 | BSW |
| ST225/75R15 | 117/112M | E / 10 | 100A2782 | 6.0 | 6.0 - 7.0 | 2,830/2,470 | 80 | 11 | 28.3 | 8.8 | 31.4 | BSW |
| ST235/80R16 | 123/119M | E / 10 | 100A2783 | 6.5 | 6.0 - 7.5 | 3,420/3,000 | 80 | 16 | 30.8 | 9.3 | 40.6 | BSW |
| ST235/85R16 | 125/121M | E / 10 | 100A2784 | 6.5 | 6.0 - 7.0 | 3,640/3,200 | 80 | 16 | 31.7 | 9.3 | 42.7 | BSW |

LI Load Index **SR** Speed Rating **(s/d)** Single/Dual **LR** Load Range **PR** Ply Rating **BSW** Black Side Wall

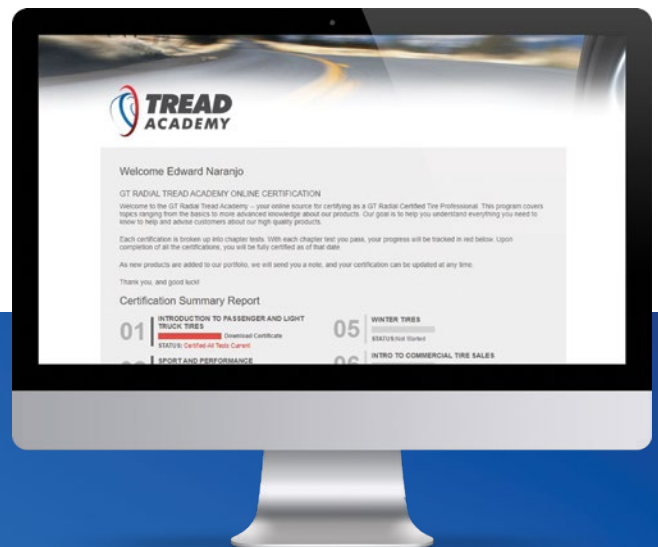

EXPERIENCE TREAD ACADEMY!

TreadAcademy.com is a resource for tire professionals to learn about and get certified on GT Radial's product offering.

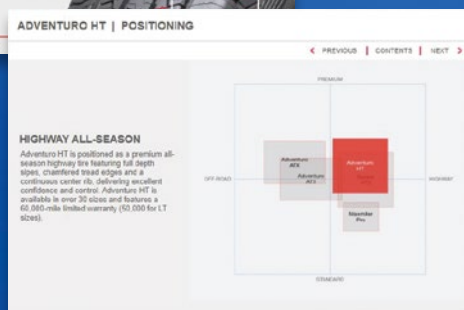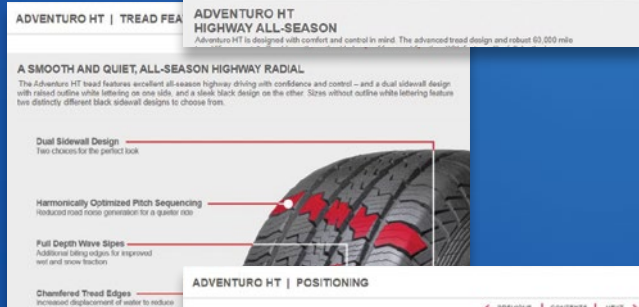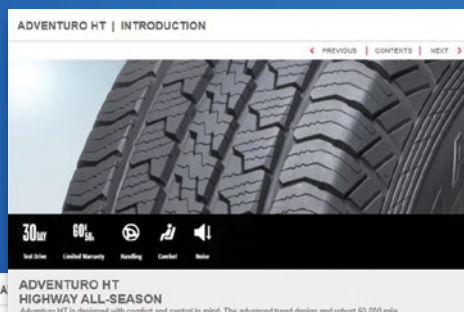

GT RADIAL CERTIFIED PROFESSIONAL

Designed for tire dealers and technicians, our GT Radial Certified Professional program is a quick and straight forward way to learn the specifics about our products and take your certification test right here. Certification will help prepare your team with tools to sell and support GT Radial products with confidence.

PASSENGER AND LIGHT TRUCK CERTIFICATION


Passenger and Light Truck tire certification starts with an introductory module that covers the basics, and includes product modules for just about every product we sell.

DEALER TOOLS AND MORE

Product guides and catalogs are just a click away... including tech bulletins for passenger and light truck tires.

TREADACADEMY.COM

Designations, Load Index & Speed Rating

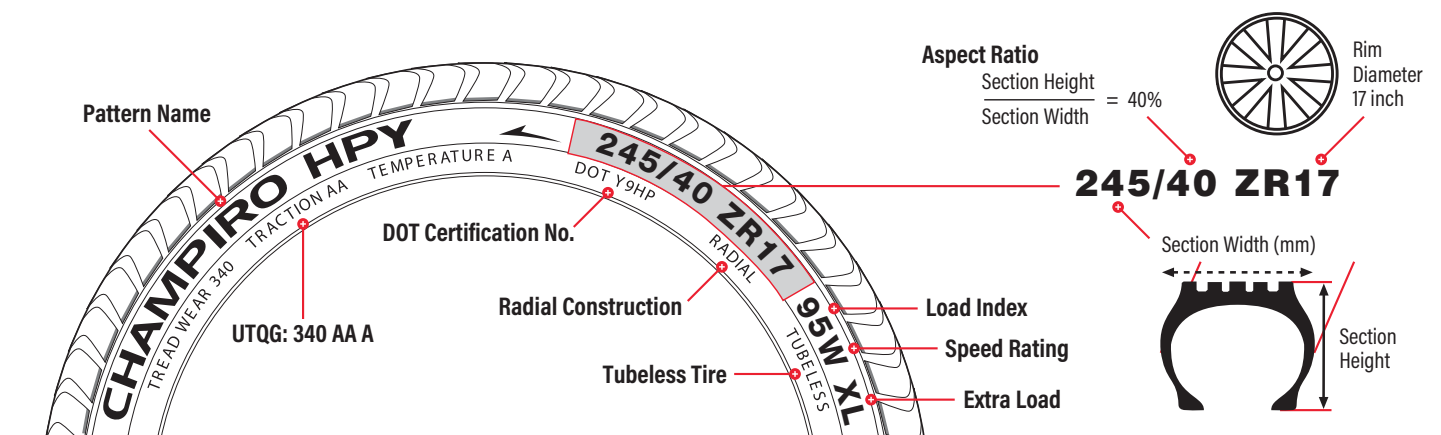

Before fitting, it is essential to check the different markings to ensure that the tire meets the maximum load and speed possibilities and/or the regulations in force.

SAFETY WARNING

1. Never inflate beyond 40PSI (275kPa) to seat beads.
2. Tires should always be installed by qualified technicians following USTMA (formerly RMA) installation procedures.
3. Never mount tires on rims which are damaged or not smooth and clean.
4. Never mount a tire with a torn bead.
5. Never inflate a tire that is lying on the floor or other flat surface.
6. Always use a tire mounting machine with hold-down device or safety cage, or bolt to vehicle axle.

MOUNT ONLY ON A RIM OF EXACT SAME DIAMETER AS THE TIRE.

Speed Rating System

| SR | MPH | KM/H |
|-----|-----------|-----------|
| B | 31 | 50 |
| C | 37 | 60 |
| D | 40 | 65 |
| E | 43 | 70 |
| F | 50 | 80 |
| G | 56 | 90 |
| J | 62 | 100 |
| K | 68 | 110 |
| L | 75 | 120 |
| M | 81 | 130 |
| N | 87 | 140 |
| P | 93 | 150 |
| Q | 100 | 160 |
| R | 106 | 170 |
| S | 113 | 180 |
| T | 118 | 190 |
| U | 124 | 200 |
| H | 130 | 210 |
| V | 149 | 240 |
| W | 168 | 270 |
| Y | 186 | 300 |
| (Y) | Above 186 | Above 300 |

Load Capacity Index

| LI | LBS | KG | LI | LBS | KG |
|-----|-------|-----|-----|-------|-------|
| 67 | 677 | 307 | 101 | 1,819 | 825 |
| 68 | 694 | 315 | 102 | 1,874 | 850 |
| 69 | 716 | 325 | 103 | 1,929 | 875 |
| 70 | 739 | 335 | 104 | 1,984 | 900 |
| 71 | 761 | 345 | 105 | 2,039 | 925 |
| 72 | 783 | 355 | 106 | 2,094 | 950 |
| 73 | 805 | 365 | 107 | 2,150 | 975 |
| 74 | 827 | 375 | 108 | 2,205 | 1,000 |
| 75 | 852 | 387 | 109 | 2,271 | 1,030 |
| 76 | 882 | 400 | 110 | 2,337 | 1,060 |
| 77 | 908 | 412 | 111 | 2,403 | 1,090 |
| 78 | 937 | 425 | 112 | 2,469 | 1,120 |
| 79 | 964 | 437 | 113 | 2,535 | 1,150 |
| 80 | 992 | 450 | 114 | 2,601 | 1,180 |
| 81 | 1,018 | 462 | 115 | 2,679 | 1,215 |
| 82 | 1,047 | 475 | 116 | 2,756 | 1,250 |
| 83 | 1,073 | 487 | 117 | 2,833 | 1,285 |
| 84 | 1,102 | 500 | 118 | 2,910 | 1,320 |
| 85 | 1,135 | 515 | 119 | 2,998 | 1,360 |
| 86 | 1,168 | 530 | 120 | 3,086 | 1,400 |
| 87 | 1,201 | 545 | 121 | 3,197 | 1,450 |
| 88 | 1,235 | 560 | 122 | 3,307 | 1,500 |
| 89 | 1,279 | 580 | 123 | 3,417 | 1,550 |
| 90 | 1,323 | 600 | 124 | 3,527 | 1,600 |
| 91 | 1,356 | 615 | 125 | 3,658 | 1,650 |
| 92 | 1,389 | 630 | 126 | 3,748 | 1,700 |
| 93 | 1,433 | 650 | 127 | 3,858 | 1,750 |
| 94 | 1,477 | 670 | 128 | 3,968 | 1,800 |
| 95 | 1,521 | 690 | 129 | 4,079 | 1,850 |
| 96 | 1,565 | 710 | 130 | 4,189 | 1,900 |
| 97 | 1,609 | 730 | 131 | 4,299 | 1,950 |
| 98 | 1,653 | 750 | 132 | 4,409 | 2,000 |
| 99 | 1,764 | 775 | 133 | 4,542 | 2,060 |
| 100 | 1,819 | 800 | 134 | 4,674 | 2,120 |

Load Capacity Index

| Load Range | Ply Rating | Load Range | Ply Rating |
|------------|------------|------------|------------|
| A | 2 | G | 14 |
| B | 4 | H | 16 |
| C | 6 | J | 18 |
| D | 8 | L | 20 |
| E | 10 | M | 22 |
| F | 12 | N | 24 |

Warranties

5YR

5 Year Limited Warranty

This Standard Limited Warranty Policy and Procedures ("Standard Limited Warranty") applies to all new consumer (PCR/LTR) tires purchased on or after January 1, 2018, sold or distributed under the GT Radial brand bearing the corresponding D.O.T. tire identification number.

To be eligible, the tire must meet the following criteria:

- Purchased in the United States or Canada
- The tires were operated under normal service conditions and used on the same vehicle on which they were originally installed and according to the vehicle manufacturer's recommendations
- The consumer is the original purchaser of the tire
- The tires are of correct size, load and speed rating for the make and type of vehicle
- The tires were used on the proper road surfaces for which they were designed
- The tires are not subject to an exclusion (see "What is not covered by the Standard Limited Warranty")
- The warranty claim procedure, found under "Owner's Obligation," is completed in full

What is covered by the Standard Limited Warranty

Upon examination by the GT Radial representative, any eligible GT Radial tire that has become unusable due to a condition attributable to materials and/or workmanship within 60 months from the date of manufacturing of the tire (DOT), and before the tire wears down to 2/32 inch (1.6 mm), and not subject to the exclusions in section "What is not covered by the Standard Limited Warranty," will be replaced with an equivalent new GT Radial product on the basis set forth in this Limited Warranty.

Adjustment on ride comfort or out-of-round is allowed only during the first 2/32 inch of the original tread depth and within 12 months from the date of purchase (whichever comes first) supported with proof of purchase.

Any GT Radial tire that satisfies the above conditions which has become unusable due to conditions attributable to materials and/or workmanship will be replaced free of charge through a GT Radial Authorized Dealer. The cost of mounting and balancing and other service charges, disposal fees, or applicable taxes are payable by the consumer (i.e., vehicle owner / end user).

Any GT Radial tire that has been worn beyond the first 2/32 inch of the original usable tread depth which is adjusted under this Standard Limited Warranty due to materials and/or workmanship will be replaced with an equivalent new GT Radial product subject to a pro-rated charge through a GT Radial Authorized Dealer. The cost of mounting, balancing, and other service charges, disposal fees, or applicable taxes are payable by the consumer.

What is not covered by the Standard Limited Warranty

This Standard Limited Warranty does not apply to consumer (PCR/LTR) tires which have become unserviceable under (but not limited to) the following conditions:

- Incorrect size or load rating for the vehicle
- Road hazard injury (e.g., a cut, snag, bruise, impact damage or puncture) for selected products covered by the Road Hazard Warranty please refer to Road Hazard Warranty section
- Improper use or operation, including: improper inflation pressure, overloading, curbing, use of improper rim or wheel, improper mounting or demounting, tire/wheel spinning, misuse, misapplication, negligence, tire alteration, or use in competition or racing
- Use in commercial applications for tread wear
- Improper maintenance of tire, wheel, or vehicle components: misalignment, imbalance, worn components, or other vehicle conditions, characteristics or defects
- Highway tires that are operated in on-off highway applications
- Tires subjected to severe under-inflated or run-flat conditions
- Improperly repaired tire
- Uneven or rapid wear which is caused by mechanical irregularity in the vehicle such as wheel misalignment, (measured tread difference of 2/32 inch or more across the tread on the same tire)
- Accident, fire, chemical corrosion, or vandalism
- Flat spotting caused by improper storage or brake lock
- Contamination or degradation by petroleum products or other chemicals, solid or gaseous materials other than air, nitrogen or carbon dioxide (for example, water based sealers or balancing substances)
- Ozone or weather cracking after 48 months from manufacturing date
- With the serial number buffed, cut or illegible
- Purchased or used outside the United States or Canada
- With less than 2/32nds of an inch remaining tread in any groove
- With a ride disturbance complaint that occurs after the first 2/32nds of tread wear
- Damaged through use of any tube or flap
- Damaged through improper use of tire chains
- Use of Run Flat technology tires without a properly operating low air pressure warning system (TPMS - Tire Pressure Monitoring System)

See Owner's Obligation section for claim eligibility.



Limited Mileage Warranty

This Limited Mileage Warranty applies to all new consumer (PCR/LTR) tires purchased on or after January 1, 2018, sold or distributed under the GT Radial brand bearing the corresponding D.O.T. tire identification number.

The following GT Radial brand pattern designs are covered by a limited warranty for tread wear as follows:

| Tire Pattern | Mileage Warranty* |
|----------------------------|------------------------------------|
| CHAMPIRO UHP ^{AS} | 45,000 Miles |
| MAXTOUR LX | 70,000 Miles |
| MAXTOUR ALL SEASON | 60,000 Miles |
| CHAMPIRO TOURING A/S | 60,000 Miles |
| ADVENTURO HT | 60,000 Miles (50,000 for LT sizes) |
| SAVERO HT2 | 50,000 Miles |
| ADVENTURO ATX | 50,000 Miles (P-Metric only) |
| ADVENTURO AT ³ | 50,000 Miles (P-Metric only) |

*Half stated mileage warranty for rear of split fitment

Eligibility

GT Radial will provide a prorated mileage credit towards the purchase of a comparable GT Radial tire.

Vehicles with staggered fitments (e.g., front and rear tire sizes are different) cannot be rotated. Therefore, GT Radial warrants tires mounted in the rear axles of vehicles with staggered fitments only up to 50% of the warranted miles under the Standard GT Radial Mileage warranty.

To be eligible, the consumer (PCR/LTR) tire must meet the following criteria:

- Purchased in the United States or Canada
- Is properly serviced and maintained, with periodic rotation, all evidenced by acceptable service records
- Tread is evenly worn down to the top of the treadwear indicator bars
- Was mounted within 60 months from the date of purchase
- The tire is of the correct size and load rating for the make and type of vehicle
- The tire has been used on road surfaces for which the tire has been designed
- Original proof of purchase with installation miles must be provided
- The tire is not subject to exclusion (see Section "What is not covered by the Limited Mileage Warranty")

Driving habits, driving conditions, road conditions, and vehicle maintenance all play a part in the tread life of a tire. If a tire does not reach the warranted mileage, and the owner of the tire has complied with the terms and conditions of the Limited Mileage Warranty, GT Radial will replace the tire as follows:

If the eligible tire wears out (down to 2/32 of an inch remaining tread depth), before warranty miles are achieved, as measured on the properly functioning odometer of the vehicle under normal passenger car, SUV/CUV, or Light Truck use, GT Radial will make an allowance for the difference of the warranted mileage versus the actual mileage achieved toward the purchase of a comparable new GT Radial brand tire, prorated on warranted mileage.

The Authorized Dealer will calculate the replacement allowance by multiplying the percentage of the warranted mileage not received by the retailer's selling price at the time and place of the adjustment.

What is not covered by the Limited Mileage Warranty

- Tires of incorrect size or load rating for the vehicle
- Tires not rotated in accordance with the prescribed rotation patterns and mileage levels as recommended by either the vehicle manufacturer or GT Radial
- Tires damaged due to road hazard injury (e.g., a cut, snag, bruise, impact damage or puncture)
- Improper use or operation, including: improper inflation pressure, overloading, curbing, use of improper rim or wheel, improper mounting or demounting, tire/wheel spinning, misuse, misapplication, negligence, tire alteration, or use in competition or racing
- Tires used in commercial applications including, but not limited to, police, taxi service, national account, government, or contract sales
- Tires installed on any vehicle other than the vehicle on which the tires were originally installed
- Improper maintenance of tire, wheel or vehicle components: misalignment, imbalance, worn components, or other vehicle conditions, characteristics or defects
- Highway tires that are operated in on-off highway application
- Tires subjected to severe under-inflated or run-flat conditions
- Improperly repaired tire
- Uneven or rapid wear which is caused by mechanical irregularity in the vehicle such as wheel misalignment, (measured tread difference of 2/32 inch or more across the tread on the same tire)
- Tires damaged by an accident, fire, chemical corrosion, tire alteration, or vandalism
- Tires which have flat spotting caused by improper storage or brake lock
- Contamination or degradation by petroleum products or other chemicals, solid or gaseous materials other than air, nitrogen, or carbon dioxide (for example, water based sealers or balancing substances)
- With the serial number buffed, cut, or illegible
- Purchased or used outside the United States or Canada

See Owner's Obligation section for claim eligibility.



Road Hazard Warranty

This warranty applies to any new GT Radial MAXTOUR LX, CHAMPIRO TOURING A/S or MAXTOUR ALL SEASON brand replacement tire purchased on or after January 1, 2018 used in normal service on the vehicle on which it was originally fitted and in accordance with the maintenance recommendations and safety warning contained in the vehicle's original owners manual for the first 12,000 Miles / 20,000 Kilometers or 12 months from the date of purchase, whichever comes first. At that time, all warranties, express or implied, expire.

If an eligible tire is rendered unserviceable due to a non-repairable road hazard (cut, tear, impact break or puncture) during the first 12,000 Miles / 20,000 Kilometers of original tread life as measured on the properly functioning odometer of the vehicle or twelve (12) months from the date of purchase, whichever comes first, it will be replaced with a comparable new GT Radial MAXTOUR LX, CHAMPIRO TOURING A/S or MAXTOUR ALL SEASON, prorated on warranted mileage.

The retailer will calculate the replacement allowance by multiplying the percentage of the warranted mileage not received by the retailer's selling price at the time and place of adjustment. A comparable new GT Radial MAXTOUR LX, CHAMPIRO TOURING A/S or MAXTOUR ALL SEASON is a tire of the same line, or in the event that a tire of the same line is not available, a tire of the same basic construction and quality which differs only in sidewall or tread design.

If a higher price tire is accepted as a replacement tire or you wish to upgrade to a more expensive tire at the time of adjustment, you will be responsible for any additional costs of the replacement tire versus the original tire.

A \$10 per tire processing fee applies to each replacement transaction. The \$10 per tire processing fee will be deducted from the adjustment credit memo per tire, per transaction. In addition, all service charges (mounting, balancing or new valve) and applicable taxes are not included.

What is not covered by the Warranty

- Tires purchased before January 1, 2018
- Ozone or weather cracking
- The addition of liquid, solid or gaseous materials other than air, nitrogen or carbon dioxide (e.g., water based sealers or balancing substances)
- Flat spotting caused by improper storage
- Use in commercial applications for tread wear claims
- Uneven or rapid wear which is caused by mechanical irregularity in the vehicle such as wheel misalignment
- Tires used in commercial application including but not limited to: police, taxi and limousine applications
- Tire damage of any kind caused by misuse, improper maintenance, overloading, racing, improper inflation, chain damage, high speed spin out(s), or the mechanical condition of the vehicle
- Purchased or used outside the United States or Canada
- Continued use while tire is flat or severely under inflated
- Tires with DOT number cut or buffed. Tires must have Department of Transportation identification numbers
- Tire damage due to wreck, collision, chemical contamination, fire or vandalism
- Any GT Radial MAXTOUR LX, CHAMPIRO TOURING A/S or MAXTOUR ALL SEASON tire that becomes unserviceable due to workmanship or material defects covered by the GT Radial Tire Limited Warranty
- Any GT Radial MAXTOUR LX, CHAMPIRO TOURING A/S or MAXTOUR ALL SEASON tire altered to change its appearance after date of purchase
- Tire damaged due to improper mounting/tire/wheel imbalance or demounting

See Owner's Obligation section for claim eligibility.



24 Hour Roadside Assistance

Roadside assistance is available 24 hours a day, 365 days a year, anywhere in the United States and Canada, for 2 years from the date of purchase of your GT Radial MAXTOUR LX, CHAMPIRO TOURING A/S and MAXTOUR ALL SEASON tires. In the event of a flat tire, you must call the toll-free number below and a qualified service provider will replace the flat tire with your inflated spare. If you do not carry an inflated spare and a tow or other services are necessary, you will be solely responsible for any charges incurred.

Services exclude RVs, fleet vehicles, off-road vehicles, or vehicles off the road (winch-out), trailers, any vehicles in tow, vehicle over one ton capacity, commercial vehicles, vehicles already at a repair facility or any vehicle which at the sole determination of the service provider, is in such condition that service is likely to result in damage to the vehicle. Theft, vandalism and accident related incidents are not covered. Service may not be available in areas where state/provincial providers are exclusively utilized.

To ensure prompt dispatch of service, please have the following information available:

1. Your VIN (Vehicle Identification Number)
2. Description of Vehicle - license plate #, make, model & year
3. Your name and number you are calling from
4. Location of vehicle - street address and/or nearest cross street

For Dispatch Only: 1-800-999-9460

| Pattern | Account Numbers |
|----------------------|-----------------|
| MAXTOUR LX | 690063 |
| MAXTOUR ALL SEASON | 690118 |
| CHAMPIRO TOURING A/S | 690128 |

Tire Registration

The registration of a consumer (PCR/LTR) tire is a very important safety precaution required by Federal law.

Tire registration will allow GT Radial to notify the owner in the unlikely event of a product return program. The Authorized Dealer will provide a tire registration card to record the D.O.T. tire identification number, along with the dealer's name and address.

The Owner is required to fill in his or her name and address, and mail to the address printed on the card or register the tire online by using the QR Code below or by visiting:
<https://www.gtradial-us.com/customer-information/tire-registration/>

WTY5145001-01-22



Owner's Obligation

To make an eligible claim for the 5 Year Limited, Mileage, or Road Hazard Warranties:

- The owner must rotate the tires in accordance with prescribed rotation patterns as recommended by either the vehicle manufacturer or GT Radial
- Owner is responsible for proper maintenance of tire and vehicle, and maintaining proper tire pressure
- When making a claim, the owner must present the tire(s) to be adjusted, with an original sales invoice showing the tire description, mounting mileage, and the date the tire(s) were installed, to an authorized GT Radial retailer. Once replaced, the tire(s) adjusted become property of GT Radial
- Owner is responsible for paying all applicable taxes
- Owner is also responsible for paying local tire-disposal fees and any parts or service, regardless of mileage or months of service. This includes payment for tire rotation, alignment, towing, road service, valve stems and tire repairs
- No claim will be recognized unless submitted on a GT Radial claim form



2022



/GTRadialUSA



@GTRadialUSA



/GTRadialNorthAmerica

WWW.GTRADIAL.COM

contact@gtradial-us.com

5144039-01-22