

**WINTER**

**PRODUCT GUIDE**

2023

EXPERIENCE THE PERFORMANCE





# EXPE PER

**RIENCE THE  
FORMANCE**









# WINTER

|                               |  |   |    |
|-------------------------------|--|---|----|
| <b>ICEPRO<sup>3</sup></b>     |  | STUDDABLE WINTER .....                        | 4  |
| <b>CHAMPIRO ICEPRO</b>        |  | STUDDABLE WINTER .....                        | 6  |
| <b>ICEPRO SUV<sup>3</sup></b> |  | STUDDABLE WINTER SUV & PICKUP .....           | 8  |
| <b>CHAMPIRO ICEPRO SUV</b>    |  | STUDDABLE WINTER SUV .....                    | 10 |
| <b>ICEPRO LT<sup>3</sup></b>  |  | STUDDABLE WINTER LIGHT TRUCK .....            | 12 |
| <b>CHAMPIRO WINTERPRO HP</b>  |  | STUDLESS WINTER PERFORMANCE .....             | 14 |
| <b>WINTERPRO<sup>2</sup></b>  |  | STUDLESS WINTER .....                         | 16 |
| <b>MAXMILER ICE</b>           |  | STUDDABLE WINTER COMMERCIAL VAN .....         | 18 |
|                               |  | POSITIONING CHARTS .....                      | 20 |
|                               |  | DESIGNATIONS, LOAD INDEX & SPEED RATING ..... | 21 |
|                               |  | WARRANTY & OWNER'S OBLIGATION .....           | 22 |

# IcePro<sup>3</sup>

STUDDABLE WINTER

14 - 18 Inch 

Speed Rating: T / H 

40 - 70 Series 

M+S Rated 



Wet



Comfort



Noise



Winter



Studdable

IcePro<sup>3</sup> is the next generation of studdable winter tire with coverage for a wide range of passenger and crossover vehicles. Improvements in stud pin hole design and distribution maximize ice traction while an optimized tread pattern enhances grip and reduces noise generation. Designed to handle the harshest ice and snow conditions, the IcePro<sup>3</sup> can be used with or without studs.



## FEATURES / BENEFITS

### Directional Tread Pattern

Exceptional grip and traction in deep snow and reduced road noise generation

### Optimal Stud Distribution

Optimized distribution of up to 140 stud pin holes improve traction and braking on ice when studs are used

### Wide Tread Grooves

Effectively removes slush and ice from tread contact area

### High Silica Compound

Delivers excellent mileage and enhanced ice and snow performance in low temperatures



| Tire Size | LI / SR | Item Number | Factory Studded Item # | Measuring Rim inch | Rim Width Range inch | Max. Load lbs | Max. Pressure psi | Tread Depth 32nd | Overall Diameter inch | Section Width inch | Weight lbs | Side Wall | Stud Type   |
|-----------|---------|-------------|------------------------|--------------------|----------------------|---------------|-------------------|------------------|-----------------------|--------------------|------------|-----------|-------------|
| 175/65R14 | 86T XL  | 100A3139    | 100A3139S              | 5.0                | 5.0 - 6.0            | 1,168         | 50                | 11               | 23.0                  | 7.0                | 17.6       | BSW       | TIKKA A8-10 |
| 185/65R14 | 90T XL  | 100A3142    | 100A3142S              | 5.5                | 5.0 - 6.5            | 1,323         | 50                | 11               | 23.5                  | 7.4                | 18.8       | BSW       | TIKKA A8-10 |
| 175/70R14 | 88T XL  | 100A3140    | 100A3140S              | 5.0                | 4.5 - 6.0            | 1,235         | 50                | 11               | 23.7                  | 7.0                | 18.5       | BSW       | TIKKA A8-10 |
| 185/70R14 | 92T XL  | 100A3144    | 100A3144S              | 5.5                | 4.5 - 6.0            | 1,389         | 50                | 11               | 24.3                  | 7.4                | 20.4       | BSW       | TIKKA A8-10 |
| 185/60R15 | 88T XL  | 100A3141    | 100A3141S              | 5.5                | 5.0 - 6.5            | 1,235         | 50                | 11               | 23.7                  | 7.4                | 19.6       | BSW       | TIKKA A8-10 |
| 195/60R15 | 92T XL  | 100A3145    | 100A3145S              | 6.0                | 5.5 - 7.0            | 1,389         | 50                | 11               | 24.2                  | 7.9                | 20.5       | BSW       | TIKKA A8-10 |
| 175/65R15 | 84T     | 100A3966    | 100A3966S              | 5.0                | 5.0 - 6.0            | 1,102         | 44                | 11               | 24.0                  | 7.0                | 18.4       | BSW       | TIKKA A8-10 |
| 185/65R15 | 88T     | 100A3143    | 100A3143S              | 5.5                | 5.0 - 6.5            | 1,235         | 44                | 11               | 24.5                  | 7.4                | 18.5       | BSW       | TIKKA A8-10 |
| 195/65R15 | 95T XL  | 100A3146    | 100A3146S              | 6.0                | 5.5 - 7.0            | 1,521         | 50                | 11               | 25.0                  | 7.9                | 21.0       | BSW       | TIKKA A8-10 |
| 205/55R16 | 94T XL  | 100A3138    | 100A3138S              | 6.5                | 5.5 - 7.5            | 1,477         | 50                | 11               | 24.9                  | 8.4                | 21.8       | BSW       | TIKKA A8-10 |
| 215/55R16 | 97T XL  | 100A3149    | 100A3149S              | 7.0                | 6.0 - 7.5            | 1,609         | 50                | 11               | 25.3                  | 8.9                | 24.5       | BSW       | TIKKA A8-10 |
| 205/60R16 | 96T XL  | 100A3147    | 100A3147S              | 6.0                | 5.5 - 7.5            | 1,565         | 50                | 11               | 25.7                  | 8.2                | 23.4       | BSW       | TIKKA A8-10 |
| 215/60R16 | 99T XL  | 100A3151    | 100A3151S              | 6.5                | 6.0 - 7.5            | 1,709         | 50                | 11               | 26.1                  | 8.7                | 25.7       | BSW       | TIKKA A8-10 |
| 225/60R16 | 98T     | 100A3158    | 100A3158S              | 6.5                | 6.0 - 8.0            | 1,653         | 44                | 11               | 26.6                  | 9.0                | 25.2       | BSW       | TIKKA A8-10 |
| 205/65R16 | 95T     | 100A3159    | 100A3159S              | 6.0                | 5.5 - 7.5            | 1,521         | 44                | 11               | 26.5                  | 8.2                | 23.9       | BSW       | TIKKA A8-10 |
| 215/65R16 | 98T     | 100A3153    | 100A3153S              | 6.5                | 6.0 - 7.5            | 1,653         | 44                | 11               | 27.0                  | 8.7                | 25.2       | BSW       | TIKKA A8-10 |
| 205/70R16 | 97H     | 100A3963    | 100A3963S              | 6.0                | 5.0 - 7.0            | 1,609         | 44                | 11               | 27.3                  | 8.2                | 25.9       | BSW       | TIKKA A8-10 |
| 215/45R17 | 91T XL  | 100A3959    | 100A3959S              | 7.0                | 7.0 - 8.0            | 1,356         | 50                | 11               | 24.6                  | 8.4                | 24.3       | BSW       | TIKKA A8-10 |
| 225/45R17 | 94T XL  | 100A3154    | 100A3154S              | 7.5                | 7.0 - 8.5            | 1,477         | 50                | 11               | 25.0                  | 8.9                | 24.1       | BSW       | TIKKA A8-10 |
| 205/50R17 | 93H XL  | 100A3961    | 100A3961S              | 6.5                | 5.5 - 7.5            | 1,433         | 50                | 11               | 25.1                  | 8.4                | 24.4       | BSW       | TIKKA A8-10 |
| 215/50R17 | 95T XL  | 100A3148    | 100A3148S              | 7.0                | 6.0 - 7.5            | 1,521         | 50                | 11               | 25.5                  | 8.9                | 23.8       | BSW       | TIKKA A8-10 |
| 225/50R17 | 98T XL  | 100A3155    | 100A3155S              | 7.0                | 6.0 - 8.0            | 1,653         | 50                | 11               | 25.9                  | 9.2                | 25.0       | BSW       | TIKKA A8-10 |
| 215/55R17 | 98T XL  | 100A3150    | 100A3150S              | 7.0                | 6.0 - 7.5            | 1,653         | 50                | 11               | 26.3                  | 8.9                | 26.1       | BSW       | TIKKA A8-10 |
| 225/55R17 | 101T XL | 100A3156    | 100A3156S              | 7.0                | 6.0 - 8.0            | 1,819         | 50                | 11               | 26.8                  | 9.2                | 27.4       | BSW       | TIKKA A8-10 |
| 235/55R17 | 99H     | 100A3957    | 100A3957S              | 7.5                | 6.5 - 8.5            | 1,709         | 44                | 11               | 27.2                  | 9.6                | 29.5       | BSW       | TIKKA A8-10 |
| 215/60R17 | 96T     | 100A3152    | 100A3152S              | 6.5                | 6.0 - 7.5            | 1,565         | 44                | 11               | 27.2                  | 8.7                | 25.3       | BSW       | TIKKA A8-10 |
| 225/60R17 | 99T     | 100A3157    | 100A3157S              | 6.5                | 6.0 - 8.0            | 1,709         | 44                | 11               | 27.6                  | 9.0                | 26.5       | BSW       | TIKKA A8-10 |
| 225/40R18 | 92H XL  | 100A3728    | 100A3728S              | 8.0                | 7.5 - 9.0            | 1,389         | 50                | 11               | 25.1                  | 9.0                | 25.0       | BSW       | TIKKA A8-10 |
| 225/45R18 | 95T XL  | 100A3960    | 100A3960S              | 7.5                | 7.0 - 8.5            | 1,521         | 50                | 11               | 25.9                  | 8.9                | 26.9       | BSW       | TIKKA A8-10 |
| 235/45R18 | 94T     | 100A3805    | 100A3805S              | 8.0                | 7.5 - 9.0            | 1,477         | 44                | 12               | 26.3                  | 9.3                | 27.1       | BSW       | TIKKA A8-10 |
| 245/45R18 | 100T XL | 100A3965    | 100A3965S              | 8.0                | 7.5 - 9.0            | 1,764         | 50                | 11               | 26.7                  | 9.6                | 29.8       | BSW       | TIKKA A8-10 |
| 225/50R18 | 95T     | 100A3962    | 100A3962S              | 7.0                | 6.0 - 8.0            | 1,521         | 44                | 11               | 26.9                  | 9.2                | 26.7       | BSW       | TIKKA A8-10 |
| 235/50R18 | 101T XL | 100A3729    | 100A3729S              | 7.5                | 6.5 - 8.5            | 1,819         | 50                | 11               | 27.3                  | 9.6                | 27.6       | BSW       | TIKKA A8-10 |
| 215/55R18 | 95T     | 100A3964    | 100A3964S              | 7.0                | 6.0 - 7.5            | 1,521         | 44                | 11               | 27.3                  | 8.9                | 26.1       | BSW       | TIKKA A8-10 |
| 235/55R18 | 100H    | 100A3958    | 100A3958S              | 7.5                | 6.5 - 8.5            | 1,764         | 44                | 11               | 28.1                  | 9.6                | 36.8       | BSW       | TIKKA A8-10 |

**LI** Load Index **SR** Speed Rating **XL** Extra Load **BSW** Black Side Wall

# CHAMPIRO IcePro

STUDDABLE WINTER

14 - 17 Inch 

Speed Rating: T 

45 / 55 - 75 Series 

M+S Rated **M+S**



CHAMPIRO IcePro is a studdable winter tire with sizes for passenger and crossover vehicles. Designed to handle the harshest ice and snow conditions, it can be used with or without studs, depending on the level of traction required.

## FEATURES / BENEFITS

### Studdable Design

Delivers reliability in extreme weather conditions

### Special Stud Distribution

Enhanced grip when studs are installed and reduced noise levels

### Wide Tread Grooves

Effectively removes slush and ice from tread contact area

### Silica Compound

Improved ice performance and snow traction





STUDDABLE WINTER **CHAMPIRO IcePro**

| Tire Size | LI / SR | Item Number | Factory Studded Item # | Measuring Rim inch | Rim Width Range inch | Max. Load lbs | Max. Pressure psi | Tread Depth 32nd | Overall Diameter inch | Section Width inch | Weight lbs | Side Wall | Stud Type   |
|-----------|---------|-------------|------------------------|--------------------|----------------------|---------------|-------------------|------------------|-----------------------|--------------------|------------|-----------|-------------|
| 185/60R14 | 82T     |             | 100A1983S              | 5.5                | 5.0 - 6.5            | 1,047         | 44                | 12               | 22.8                  | 7.4                | 17.2       | BSW       | TIKKA A8-11 |
| 185/55R15 | 86T XL  | 100A1984    | 100A1984S              | 6.0                | 5.0 - 6.5            | 1,168         | 50                | 12               | 23.0                  | 7.6                | 19.0       | BSW       | TIKKA A8-10 |
| 195/55R15 | 89T XL  |             | 100A1985S              | 6.0                | 5.5 - 7.0            | 1,279         | 50                | 12               | 23.4                  | 7.9                | 20.4       | BSW       | TIKKA A8-11 |
| 205/65R15 | 94T     | 100A195     | 100A195S               | 6.0                | 5.5 - 7.0            | 1,477         | 44                | 12               | 25.5                  | 8.2                | 23.4       | BSW       | TIKKA A8-11 |
| 205/70R15 | 96T     |             | 100A198S               | 6.0                | 5.5 - 7.0            | 1,565         | 44                | 12               | 26.3                  | 8.2                | 24.2       | BSW       | TIKKA A8-11 |
| 205/75R15 | 97T     |             | 100A1986S              | 5.5                | 5.0 - 7.0            | 1,609         | 44                | 12               | 27.1                  | 8.0                | 23.9       | BSW       | TIKKA A8-11 |
| 225/55R16 | 99T XL  |             | 100A1987S              | 7.0                | 6.0 - 8.0            | 1,709         | 50                | 13               | 25.7                  | 9.2                | 25.3       | BSW       | TIKKA A8-11 |
| 225/65R16 | 100T    | 100A1670    | 100A1670S              | 6.5                | 6.0 - 8.0            | 1,764         | 44                | 13               | 27.5                  | 9.0                | 27.9       | BSW       | TIKKA A8-11 |
| 235/45R17 | 97T XL  | 100A1989    | 100A1989S              | 8.0                | 7.5 - 9.0            | 1,609         | 50                | 12               | 25.4                  | 9.3                | 25.9       | BSW       | TIKKA A8-11 |

**LI** Load Index **SR** Speed Rating **XL** Extra Load **BSW** Black Side Wall



# IcePro SUV<sup>3</sup>

STUDDABLE WINTER SUV & PICKUP

16 - 20 Inch 

Speed Rating: S / T 

50 - 70 Series 

M+S Rated 



Wet



Comfort



Noise



Winter



Studdable

IcePro SUV<sup>3</sup> is the next generation of studdable winter tire with sizes for pickup trucks and SUVs. It features high-volume pin hole distribution throughout the tread to maximize ice traction and braking performance. The IcePro SUV<sup>3</sup> can be used with or without studs and is designed to provide excellent grip and handling in extreme winter conditions while reducing on road noise.



## FEATURES / BENEFITS

### Directional Tread Pattern

Pickup and SUV-specific pattern design delivers exceptional grip and traction in deep snow and reduced road noise generation

### Optimal Stud Distribution

Optimized distribution of up to 156 stud pin holes improve traction and braking on ice when studs are used

### Wide Tread Grooves

Effectively removes slush and ice from tread contact area

### High Silica Compound

Delivers excellent mileage and enhanced ice and snow performance in low temperatures



| Tire Size | LI / SR | Item Number | Factory Studded Item # | Measuring Rim inch | Rim Width Range inch | Max. Load lbs | Max. Pressure psi | Tread Depth 32nd | Overall Diameter inch | Section Width inch | Weight lbs | Side Wall | Stud Type   |
|-----------|---------|-------------|------------------------|--------------------|----------------------|---------------|-------------------|------------------|-----------------------|--------------------|------------|-----------|-------------|
| 215/70R16 | 100T    | 100A3160    | 100A3160S              | 6.5                | 5.5 - 7.0            | 1,764         | 44                | 12               | 27.9                  | 8.7                | 27.5       | BSW       | TIKKA A8-10 |
| 235/70R16 | 109T XL | 100A3165    | 100A3165S              | 7.0                | 6.0 - 8.0            | 2,271         | 50                | 12               | 29.0                  | 9.5                | 32.4       | BSW       | TIKKA A8-10 |
| 235/60R17 | 106T XL | 100A3973    | 100A3973S              | 7.0                | 6.5 - 8.5            | 2,094         | 50                | 12               | 28.1                  | 9.4                | 29.2       | BSW       | TIKKA A8-10 |
| 215/65R17 | 99T     | 100A3725    | 100A3725S              | 6.5                | 6.0 - 8.0            | 1,709         | 44                | 12               | 28.0                  | 8.7                | 27.5       | BSW       | TIKKA A8-10 |
| 225/65R17 | 102T    | 100A3161    | 100A3161S              | 6.5                | 6.0 - 8.0            | 1,874         | 44                | 12               | 28.5                  | 9.0                | 29.0       | BSW       | TIKKA A8-10 |
| 235/65R17 | 108T XL | 100A3163    | 100A3163S              | 7.0                | 6.5 - 8.5            | 2,205         | 50                | 12               | 29.1                  | 9.5                | 32.2       | BSW       | TIKKA A8-10 |
| 265/70R17 | 115T    | 100A3670    | 100A3670S              | 8.0                | 7.0 - 9.0            | 2,679         | 44                | 12               | 31.7                  | 10.7               | 40.4       | BSW       | TIKKA A8-10 |
| 225/55R18 | 102T XL | 100A3974    | 100A3974S              | 7.0                | 6.0 - 8.0            | 1,874         | 50                | 12               | 27.8                  | 9.2                | 27.5       | BSW       | TIKKA A8-10 |
| 225/60R18 | 104T XL | 100A3972    | 100A3972S              | 6.5                | 6.0 - 8.0            | 1,984         | 50                | 12               | 28.6                  | 9.0                | 30.2       | BSW       | TIKKA A8-10 |
| 235/60R18 | 107T XL | 100A3162    | 100A3162S              | 7.0                | 6.5 - 8.5            | 2,149         | 50                | 12               | 29.1                  | 9.5                | 31.8       | BSW       | TIKKA A8-10 |
| 245/60R18 | 105T    | 100A3167    | 100A3167S              | 7.0                | 7.0 - 8.5            | 2,039         | 44                | 12               | 29.6                  | 9.8                | 32.1       | BSW       | TIKKA A8-10 |
| 265/60R18 | 110T    | 100A3726    | 100A3726S              | 8.0                | 7.5 - 9.0            | 2,337         | 44                | 12               | 30.1                  | 10.7               | 36.1       | BSW       | TIKKA A8-10 |
| 235/65R18 | 106T    | 100A3164    | 100A3164S              | 7.0                | 6.5 - 8.5            | 2,094         | 44                | 12               | 30.0                  | 9.5                | 32.3       | BSW       | TIKKA A8-10 |
| 255/65R18 | 115T XL | 100A3976    | 100A3976S              | 7.5                | 7.0 - 9.0            | 2,679         | 50                | 12               | 31.1                  | 10.2               | 37.9       | BSW       | TIKKA A8-10 |
| 265/65R18 | 116T XL | 100A3969    | 100A3969S              | 8.0                | 7.5 - 9.5            | 2,756         | 50                | 12               | 31.5                  | 10.7               | 40.1       | BSW       | TIKKA A8-10 |
| 275/65R18 | 116T    | 100A3971    | 100A3971S              | 8.0                | 7.5 - 9.5            | 2,756         | 44                | 12               | 32.1                  | 11.0               | 42.5       | BSW       | TIKKA A8-10 |
| 255/70R18 | 113T    | 100A3968    | 100A3968S              | 7.5                | 6.5 - 8.5            | 2,535         | 44                | 12               | 32.1                  | 10.2               | 38.1       | BSW       | TIKKA A8-10 |
| 265/70R18 | 116T    | 100A3975    | 100A3975S              | 8.0                | 7.0 - 9.0            | 2,756         | 44                | 12               | 32.6                  | 10.7               | 41.5       | BSW       | TIKKA A8-10 |
| 235/55R19 | 101T    | 100A3804    | 100A3804S              | 7.5                | 6.5 - 8.5            | 1,819         | 44                | 12               | 29.2                  | 9.6                | 30.9       | BSW       | TIKKA A8-10 |
| 245/50R20 | 102T    | 100A3970    | 100A3970S              | 7.5                | 7.0 - 8.5            | 1,874         | 44                | 12               | 29.7                  | 10.0               | 31.9       | BSW       | TIKKA A8-10 |
| 275/55R20 | 117S XL | 100A3727    | 100A3727S              | 8.5                | 8.0 - 9.5            | 2,833         | 50                | 12               | 31.9                  | 11.2               | 41.7       | BSW       | TIKKA A8-10 |
| 275/60R20 | 116T XL | 100A3967    | 100A3967S              | 8.0                | 7.5 - 9.5            | 2,756         | 50                | 12               | 33.0                  | 11.0               | 43.2       | BSW       | TIKKA A8-10 |

**LI** Load Index **SR** Speed Rating **XL** Extra Load **BSW** Black Side Wall

# CHAMPIRO IcePro SUV

STUDDABLE WINTER SUV

15 - 19 Inch 

Speed Rating: T / H 

50 / 55 / 65 - 75 Series 

M+S Rated **M+S**



CHAMPIRO IcePro SUV is a studdable winter tire offering sizes for SUVs. It can be used with or without studs, depending on how much traction is required and is designed to provide excellent grip and handling in extreme winter weather conditions.



## FEATURES / BENEFITS

### Studdable Design

Delivers reliability in extreme weather conditions

### Special Stud Distribution

Enhanced grip when studs are installed and reduced noise levels

### Wide Tread Grooves

Effectively removes slush and ice from tread contact area

### Silica Compound

Improved ice performance and snow traction



STUDDABLE WINTER SUV **CHAMPIRO IcePro SUV**

| Tire Size | LI / SR | Item Number | Factory Studded Item # | Measuring Rim inch | Rim Width Range inch | Max. Load lbs | Max. Pressure psi | Tread Depth 32nd | Overall Diameter inch | Section Width inch | Weight lbs | Side Wall | Stud Type   |
|-----------|---------|-------------|------------------------|--------------------|----------------------|---------------|-------------------|------------------|-----------------------|--------------------|------------|-----------|-------------|
| 215/70R15 | 98T     |             | 100A183S               | 6.5                | 6.0 - 7.0            | 1,653         | 44                | 13               | 26.9                  | 8.7                | 28.9       | BSW       | TIKKA A8-11 |
| 225/70R16 | 103T    |             | 100A176S               | 6.5                | 6.0 - 7.0            | 1,929         | 44                | 13               | 28.4                  | 9.0                | 32.2       | BSW       | TIKKA A8-11 |
| 245/70R16 | 107H    |             | 100A1783S              | 7.0                | 6.5 - 8.0            | 2,149         | 44                | 13               | 29.5                  | 9.8                | 31.8       | BSW       | TIKKA A8-11 |
| 265/70R16 | 112T    | 100A1991    | 100A1991S              | 8.0                | 7.0 - 9.0            | 2,469         | 44                | 13               | 30.6                  | 10.7               | 36.5       | BSW       | TIKKA A8-11 |
| 225/75R16 | 108H XL |             | 100A1784S              | 6.0                | 6.0 - 7.5            | 2,205         | 50                | 13               | 29.3                  | 8.8                | 29.1       | BSW       | TIKKA A8-11 |
| 245/75R16 | 111T    |             | 100A1785S              | 7.0                | 6.5 - 8.0            | 2,403         | 44                | 13               | 30.5                  | 9.8                | 33.9       | BSW       | TIKKA A8-11 |
| 245/65R17 | 107T    | 100A1674    | 100A1674S              | 7.0                | 6.5 - 8.5            | 2,149         | 44                | 13               | 29.5                  | 9.8                | 33.1       | BSW       | TIKKA A8-11 |
| 245/70R17 | 110T    |             | 100A179S               | 7.0                | 6.5 - 7.5            | 2,337         | 44                | 13               | 30.6                  | 9.8                | 37.1       | BSW       | TIKKA A8-11 |
| 255/55R18 | 109T XL |             | 100A1672S              | 8.0                | 7.0 - 9.0            | 2,271         | 50                | 13               | 29.0                  | 10.4               | 33.8       | BSW       | TIKKA A8-11 |
| 255/50R19 | 103T    |             | 100A1994S              | 8.0                | 7.0 - 9.0            | 1,929         | 44                | 13               | 29.1                  | 10.4               | 33.3       | BSW       | TIKKA A8-11 |

**LI** Load Index **SR** Speed Rating **XL** Extra Load **BSW** Black Side Wall

INTRODUCING

# ICEPRO LT<sup>3</sup>

STUDDABLE WINTER LIGHT TRUCK

16 - 18 / 20 Inch 

Speed Rating: Q / R 

65 - 80 Series 

M+S Rated **M+S**



The new IcePro LT<sup>3</sup> is designed for the harshest winter conditions. The rugged tread pattern features dual traction lugs, optimized locking sipes and channel traction edges to ensure the IcePro LT<sup>3</sup> has excellent winter performance with or without studs. The icicle sidewall design will look great on your truck or SUV. Whether you are plowing your driveway, going off-road to the jobsite or driving on the highway, the IcePro LT<sup>3</sup> will help you get the job done safely this winter.



## FEATURES / BENEFITS

### Square Shoulder Design

Increased tread depth in the shoulder for better traction and durability

### Optimized Locking Sipes

Provides stiffness for cornering yet flexible for winter traction

### Staggered Continuous Center Rib

Large biting edges to increase winter grip

### Channel Traction Edges

Improves grip in deep snow conditions

### Dual Traction Lugs

Grouped lugs in the central zone create more open areas for maximum winter performance



STUDDABLE WINTER LIGHT TRUCK **ICEPROLT<sup>3</sup>**

| Tire Size   | LI / SR<br>(s/d) | LR / PR | Item<br>Number | Measuring<br>Rim<br>inch | Rim Width<br>Range<br>inch | Max.<br>Load<br>lbs | Max.<br>Pressure<br>psi | Tread<br>Depth<br>32nd | Overall<br>Diameter<br>inch | Section<br>Width<br>inch | Weight<br>lbs | Side<br>Wall | Stud<br>Type | Quantity |
|-------------|------------------|---------|----------------|--------------------------|----------------------------|---------------------|-------------------------|------------------------|-----------------------------|--------------------------|---------------|--------------|--------------|----------|
| LT225/75R16 | 115/112 R        | E / 10  | 100A4231       | 6.0                      | 6.0 - 7.0                  | 2,680/2,470         | 80                      | 16.5                   | 29.3                        | 8.8                      | 34.9          | BSW          | TSMI 15#     | 112      |
| LT245/75R16 | 120/116 R        | E / 10  | 100A4232       | 7.0                      | 6.5 - 8.0                  | 3,042/2,778         | 80                      | 16.5                   | 30.5                        | 9.8                      | 40.2          | BSW          | TSMI 15#     | 118      |
| LT245/70R17 | 119/116 R        | E / 10  | 100A4233       | 7.0                      | 6.5 - 8.0                  | 3,000/2,755         | 80                      | 16.5                   | 30.6                        | 9.8                      | 38.5          | BSW          | TSMI 15#     | 118      |
| LT265/70R17 | 121/118 R        | E / 10  | 100A4234       | 8.0                      | 7.0 - 8.5                  | 3,195/2,910         | 80                      | 16.5                   | 31.7                        | 10.7                     | 42.5          | BSW          | TSMI 15#     | 122      |
| LT245/75R17 | 121/118 R        | E / 10  | 100A4235       | 7.0                      | 6.5 - 7.5                  | 3,195/2,910         | 80                      | 16.5                   | 31.5                        | 9.8                      | 39.5          | BSW          | TSMI 15#     | 122      |
| LT235/80R17 | 120/117 Q        | E / 10  | 100A4236       | 6.5                      | 6.0 - 7.5                  | 3,085/2,835         | 80                      | 16.5                   | 31.8                        | 9.3                      | 38.6          | BSW          | TSMI 15#     | 122      |
| LT275/65R18 | 123/120 R        | E / 10  | 100A4237       | 8.0                      | 7.5 - 9.0                  | 3,415/3,085         | 80                      | 16.5                   | 32.1                        | 11.0                     | 44.2          | BSW          | TSMI 15#     | 122      |
| LT265/70R18 | 124/121 R        | E / 10  | 100A4238       | 8.0                      | 7.0 - 9.0                  | 3,525/3,195         | 80                      | 16.5                   | 32.6                        | 10.7                     | 44.2          | BSW          | TSMI 15#     | 126      |
| LT275/70R18 | 125/122 R        | E / 10  | 100A4239       | 8.0                      | 7.0 - 8.5                  | 3,640/3,305         | 80                      | 16.5                   | 33.2                        | 11.0                     | 46.1          | BSW          | TSMI 15#     | 126      |
| LT275/65R20 | 126/123 R        | E / 10  | 100A4240       | 8.0                      | 7.5 - 9.5                  | 3,750/3,415         | 80                      | 16.5                   | 34.1                        | 11.0                     | 51.1          | BSW          | TSMI 15#     | 130      |

**LI** Load Index **SR** Speed Rating **XL** Extra Load **BSW** Black Side Wall

# CHAMPIRO WinterPro HP

STUDLESS WINTER PERFORMANCE

16 - 19 Inch 

Speed Rating: V 

40 - 55 Series 

M+S Rated 



CHAMPIRO WinterPro HP is a studless performance winter tire developed to retain the handling and precision of performance sports cars, sedans and coupes in varied winter conditions. It features an asymmetric tread pattern that disperses water and slush, and a sunflower oil enriched tread compound for excellent traction and braking on snow and ice.

## FEATURES / BENEFITS

### High Performance Design

Built on a high performance tire platform for handling and precision in winter conditions

### Asymmetric Tread Pattern

Provides excellent performance in varied winter conditions

### Wide Tread Grooves

Evacuates water, slush and packed snow while maintaining maximum contact with the road

### Lateral Cross-Cut Grooves

Disperses water and slush and provides more biting angles for improved snow and ice grip

### Sunflower Oil Compound

Tread compound enriched with sunflower oil improves wet braking, handling and snow performance





STUDLESS WINTER PERFORMANCE **CHAMPIRO WinterPro HP**

| Tire Size | LI / SR | Item Number | Measuring Rim inch | Rim Width Range inch | Max. Load lbs | Max. Pressure psi | Tread Depth 32nd | Overall Diameter inch | Section Width inch | Weight lbs | Side Wall |
|-----------|---------|-------------|--------------------|----------------------|---------------|-------------------|------------------|-----------------------|--------------------|------------|-----------|
| 205/55R16 | 94V XL  | 100A2714    | 6.5                | 5.5 - 7.5            | 1,477         | 49                | 11               | 24.9                  | 8.5                | 24.7       | BSW       |
| 235/45R17 | 97V XL  | 100A2730    | 8.0                | 7.5 - 9.0            | 1,609         | 49                | 11               | 25.4                  | 9.3                | 25.2       | BSW       |
| 245/45R17 | 99V XL  | 100A2731    | 8.0                | 7.5 - 9.0            | 1,709         | 49                | 11               | 25.7                  | 9.6                | 26.8       | BSW       |
| 245/40R18 | 97V XL  | 100A2738    | 8.5                | 8.0 - 9.5            | 1,609         | 49                | 11               | 25.7                  | 9.8                | 26.7       | BSW       |
| 255/55R18 | 109V XL | 100A2739    | 8.0                | 7.0 - 9.0            | 2,271         | 49                | 11               | 29.0                  | 10.4               | 30.9       | BSW       |
| 255/50R19 | 107V XL | 100A2740    | 8.0                | 7.0 - 9.0            | 2,149         | 49                | 11               | 29.1                  | 10.4               | 32.2       | BSW       |

**LI** Load Index **SR** Speed Rating **XL** Extra Load **BSW** Black Side Wall



# WINTERPRO<sup>2</sup>

STUDLESS WINTER

13 - 19 Inch 

Speed Rating: H / V 

35 - 70 / 80 Series 

M+S Rated **M+S**



WINTERPRO<sup>2</sup> is the latest studless winter tire with fitments for a wide range of passenger and crossover vehicles. It features a directional pattern design for enhanced traction and stability and an innovative tread compound that delivers lower rolling resistance and better wear life. WINTERPRO<sup>2</sup> provides optimal wet, ice and snow performance and also excels on dry roads.



## FEATURES / BENEFITS

### Variable Pitch Technology

Reduced road noise for a quieter ride

### Unique Sipe Design

Two types of tread sipe styles and alternating sipe depths for improved snow performance and durability

### Directional Tread Pattern

Enhanced traction, stability and directional control

### Large Contact Patch

Improved grip, handling and control

### Innovative Compound

Silica and Nanoscopic carbon black tread compound improves winter performance, lowers rolling resistance and increases wear life



| Tire Size | LI / SR | Item Number | Measuring Rim inch | Rim Width Range inch | Max. Load lbs | Max. Pressure psi | Tread Depth 32nd | Overall Diameter inch | Section Width inch | Weight lbs | Side Wall |
|-----------|---------|-------------|--------------------|----------------------|---------------|-------------------|------------------|-----------------------|--------------------|------------|-----------|
| 155/70R13 | 75T     | 100A3186    | 4.5                | 4.0 - 5.0            | 853           | 44                | 11               | 21.6                  | 6.2                | 12.9       | BSW       |
| 165/70R13 | 79T     | 100A3189    | 5                  | 4.0 - 5.5            | 963           | 44                | 11               | 22.1                  | 6.7                | 14.1       | BSW       |
| 175/70R13 | 82T     | 100A3192    | 5                  | 4.5 - 5.5            | 1,047         | 44                | 11               | 22.7                  | 7                  | 15.1       | BSW       |
| 155/80R13 | 79T     | 100A3193    | 4.5                | 4.0 - 5.0            | 963           | 44                | 11               | 22.8                  | 6.2                | 13.8       | BSW       |
| 185/60R14 | 82T     | 100A3179    | 5.5                | 5.0 - 6.5            | 1,047         | 44                | 11               | 22.8                  | 7.4                | 16.1       | BSW       |
| 155/65R14 | 75T     | 100A3188    | 4.5                | 4.5 - 5.5            | 853           | 44                | 11               | 22                    | 6.2                | 13.7       | BSW       |
| 165/65R14 | 79T     | 100A3191    | 5                  | 4.5 - 6.0            | 963           | 44                | 11               | 22.4                  | 6.7                | 14.7       | BSW       |
| 175/65R14 | 86T XL  | 100A3203    | 5                  | 5.0 - 6.0            | 1,168         | 50                | 11               | 23                    | 7                  | 16.4       | BSW       |
| 185/65R14 | 86T     | 100A3182    | 5.5                | 5.0 - 6.5            | 1,168         | 44                | 11               | 23.5                  | 7.4                | 17.7       | BSW       |
| 165/70R14 | 81T     | 100A3172    | 5                  | 4.0 - 5.5            | 1,019         | 44                | 11               | 23.1                  | 6.7                | 15         | BSW       |
| 175/70R14 | 84T     | 100A3178    | 5                  | 4.5 - 5.5            | 1,102         | 44                | 11               | 23.7                  | 7                  | 16.5       | BSW       |
| 185/70R14 | 88T     | 100A3199    | 5.5                | 4.5 - 6.0            | 1,235         | 44                | 11               | 24.3                  | 7.4                | 17.9       | BSW       |
| 195/50R15 | 82H     | 100A3201    | 6                  | 5.5 - 7.0            | 1,047         | 44                | 11               | 22.7                  | 7.9                | 17.5       | BSW       |
| 185/55R15 | 82T     | 100A3190    | 6                  | 5.0 - 6.5            | 1,047         | 44                | 11               | 23                    | 7.6                | 17.2       | BSW       |
| 195/55R15 | 85H     | 100A3195    | 6                  | 5.5 - 7.0            | 1,135         | 44                | 11               | 23.4                  | 7.9                | 18.3       | BSW       |
| 185/60R15 | 88T XL  | 100A3173    | 5.5                | 5.0 - 6.5            | 1,235         | 50                | 11               | 23.7                  | 7.4                | 17.3       | BSW       |
| 195/60R15 | 88T     | 100A3185    | 6                  | 5.5 - 7.0            | 1,235         | 44                | 11               | 24.2                  | 7.9                | 18.8       | BSW       |
| 175/65R15 | 84T     | 100A3181    | 5                  | 5.0 - 6.0            | 1,102         | 44                | 11               | 24                    | 7                  | 16.8       | BSW       |
| 185/65R15 | 88T     | 100A3169    | 5.5                | 5.0 - 6.5            | 1,235         | 44                | 11               | 24.4                  | 7.4                | 18.7       | BSW       |
| 195/65R15 | 91H     | 100A3109    | 6                  | 5.5 - 7.0            | 1,356         | 44                | 11               | 25                    | 7.9                | 19.9       | BSW       |
| 205/65R15 | 94T     | 100A3198    | 6                  | 5.5 - 7.5            | 1,477         | 44                | 11               | 25.5                  | 8.2                | 22.3       | BSW       |
| 195/55R16 | 91H XL  | 100A3477    | 6                  | 5.5 - 7.0            | 1,356         | 50                | 11               | 24.4                  | 7.9                | 18.8       | BSW       |
| 205/55R16 | 91H     | 100A3168    | 6.5                | 5.5 - 7.5            | 1,356         | 44                | 11               | 24.9                  | 8.4                | 21.9       | BSW       |
| 215/55R16 | 97H XL  | 100A3194    | 7                  | 6.0 - 7.5            | 1,609         | 50                | 11               | 25.3                  | 8.9                | 23.6       | BSW       |
| 225/55R16 | 99H XL  | 100A3196    | 7                  | 6.0 - 8.0            | 1,709         | 50                | 11               | 25.7                  | 9.2                | 24.7       | BSW       |
| 195/60R16 | 89H     | 100A3476    | 6                  | 5.5 - 7.0            | 1,279         | 44                | 11               | 25.2                  | 7.9                | 19.1       | BSW       |
| 205/60R16 | 96H XL  | 100A3176    | 6                  | 5.5 - 7.5            | 1,565         | 50                | 11               | 25.7                  | 8.2                | 20.9       | BSW       |
| 215/60R16 | 99H XL  | 100A3175    | 6.5                | 6.0 - 7.5            | 1,709         | 50                | 11               | 26.1                  | 8.7                | 22.6       | BSW       |
| 215/65R16 | 98H     | 100A3184    | 6.5                | 6.0 - 7.5            | 1,653         | 44                | 11               | 27                    | 8.7                | 25         | BSW       |
| 215/70R16 | 100H    | 100A3205    | 6.5                | 5.5 - 7.0            | 1,764         | 44                | 11               | 27.9                  | 8.7                | 25.7       | BSW       |
| 205/40R17 | 84V XL  | TBD         |                    |                      |               |                   |                  |                       |                    |            | BSW       |
| 205/45R17 | 88V XL  | TBD         |                    |                      |               |                   |                  |                       |                    |            | BSW       |
| 215/45R17 | 91V XL  | TBD         |                    |                      |               |                   |                  |                       |                    |            | BSW       |
| 225/45R17 | 94V XL  | 100A3940    | 7.5                | 7.0 - 8.5            | 1,477         | 50                | 11               | 25                    | 8.9                | 22.7       | BSW       |
| 205/50R17 | 93V XL  | TBD         |                    |                      |               |                   |                  |                       |                    |            | BSW       |
| 215/50R17 | 95V XL  | 100A3200    | 7                  | 6.0 - 7.5            | 1,521         | 50                | 11               | 25.5                  | 8.9                | 23.8       | BSW       |
| 225/50R17 | 98V XL  | 100A3941    | 7                  | 6.0 - 8.0            | 1,653         | 50                | 11               | 25.9                  | 9.2                | 25.4       | BSW       |
| 205/55R17 | 95H XL  | 100A3202    | 6.5                | 5.5 - 7.5            | 1,521         | 50                | 11               | 25.9                  | 8.4                | 22         | BSW       |
| 215/55R17 | 98V XL  | 100A3197    | 7                  | 6.0 - 7.5            | 1,653         | 50                | 11               | 26.3                  | 8.9                | 23.5       | BSW       |
| 225/55R17 | 101V XL | TBD         |                    |                      |               |                   |                  |                       |                    |            | BSW       |
| 235/55R17 | 103V XL | 100A3946    | 7.5                | 6.5 - 8.5            | 1,929         | 50                | 11               | 27.2                  | 9.6                | 27         | BSW       |
| 215/60R17 | 96H     | 100A3943    | 6.5                | 6.0 - 7.5            | 1,565         | 51                | 11               | 27.2                  | 8.7                | 24.2       | BSW       |
| 225/60R17 | 99V     | TBD         |                    |                      |               |                   |                  |                       |                    |            | BSW       |
| 235/60R17 | 106H XL | 100A3479    | 7                  | 6.5 - 8.5            | 2,094         | 50                | 11               | 28.1                  | 9.4                | 29.1       | BSW       |
| 215/65R17 | 99V     | 100A3944    | 6.5                | 6.0 - 7.5            | 1,709         | 51                | 11               | 28                    | 8.7                | 25.9       | BSW       |
| 225/65R17 | 106H XL | 100A3945    | 6.5                | 6.0 - 8.0            | 2,094         | 50                | 11               | 28.5                  | 9                  | 27.3       | BSW       |
| 235/65R17 | 108H XL | 100A3478    | 7                  | 6.5 - 8.5            | 2,205         | 50                | 11               | 29.1                  | 9.5                | 30.2       | BSW       |
| 245/65R17 | 111H XL | 100A3110    | 7                  | 7.0 - 8.5            | 2,403         | 50                | 11               | 29.5                  | 9.8                | 32.6       | BSW       |
| 225/40R18 | 92V XL  | 100A3939    | 8                  | 7.5 - 9.0            | 1,389         | 50                | 11               | 25.1                  | 9.1                | 23.3       | BSW       |
| 225/45R18 | 95V XL  | TBD         |                    |                      |               |                   |                  |                       |                    |            | BSW       |
| 235/45R18 | 98V XL  | 100A3942    | 8                  | 7.5 - 9.0            | 1,653         | 50                | 11               | 26.3                  | 9.3                | 25.7       | BSW       |
| 245/45R18 | 100V XL | TBD         |                    |                      |               |                   |                  |                       |                    |            | BSW       |
| 225/50R18 | 99H XL  | TBD         |                    |                      |               |                   |                  |                       |                    |            | BSW       |
| 235/50R18 | 101V XL | TBD         |                    |                      |               |                   |                  |                       |                    |            | BSW       |
| 235/55R18 | 104H XL | TBD         |                    |                      |               |                   |                  |                       |                    |            | BSW       |
| 235/60R18 | 107V XL | TBD         |                    |                      |               |                   |                  |                       |                    |            | BSW       |
| 235/35R19 | 91V XL  | TBD         |                    |                      |               |                   |                  |                       |                    |            | BSW       |
| 235/45R19 | 99V XL  | TBD         |                    |                      |               |                   |                  |                       |                    |            | BSW       |
| 235/55R19 | 105V XL | 100A3947    | 7.5                | 6.5 - 8.5            | 2,039         | 50                | 11               | 29.2                  | 9.6                | 29.2       | BSW       |

LI Load Index SR Speed Rating XL Extra Load BSW Black Side Wall

INTRODUCING

# MAXMILER *Ice*

STUDDABLE WINTER COMMERCIAL VAN

15 - 16 Inch 

Speed Rating: R / T 

65 - 75 Series 

M+S Rated 



Wet



Handling



Comfort



Noise



Winter



Studdable

The GT Radial Maxmiler Ice is our first studdable winter tire for multi-purpose vans. The tire is designed for superior winter grip due to the zig-zag sipes, self-cleaning pattern and ability to feature up to 130 studs. The Maxmiler Ice has the load carrying capacity for some of today's most popular vans, like the Ford Transit. The special Arctic tread compound ensures maximum stud retention while also delivering long lasting mileage performance for a winter tire.

## FEATURES / BENEFITS

### Self-Cleaning Pattern

Ensures resistance to snow and slush accumulation

### Optimized Stud Pattern (up to 130)

Allows excellent traction in icy conditions

### Zig-Zag Siping

Additional biting edges for improved winter traction

### Continuous Center Rib

Provides good stability and steering response

### Arctic Tread Compound

Provides superior winter grip and long mileage





STUDDABLE WINTER COMMERCIAL VAN **MAXMILER ICE**


| Tire Size  | LI/SR     | Item Number | Factory Studded Item # | Measuring Rim inch | Rim Width Range inch | Max. Load lbs | Max. Pressure psi | Tread Depth 32nd | Overall Diameter inch | Section Width inch | Weight lbs | Side Wall | Stud Type   | Quantity |
|------------|-----------|-------------|------------------------|--------------------|----------------------|---------------|-------------------|------------------|-----------------------|--------------------|------------|-----------|-------------|----------|
| 195/70R15C | 104/102 R | 100A2593    | 100A2593S              | 6.0                | 5.0 - 6.0            | 1,985/1,875   | 65                | 12.5             | 25.8                  | 7.9                | 25.3       | BSW       | TIKKA H8-10 | 126      |
| 205/65R16C | 107/105 T | 100A2592    | 100A2592S              | 6.0                | 5.5 - 7.5            | 2,150/2,040   | 69                | 12.5             | 26.5                  | 8.2                | 27.1       | BSW       | TIKKA H8-10 | 130      |
| 215/65R16C | 109/107 R | 100A2595    | 100A2595S              | 6.5                | 6.0 - 7.5            | 2,270/2,150   | 69                | 12.5             | 27.0                  | 8.7                | 28.3       | BSW       | TIKKA H8-10 | 132      |
| 235/65R16C | 121/119 R | 100A2600    | 100A2600S              | 7.0                | 6.5 - 7.5            | 3,195/3,000   | 84                | 12.5             | 28.0                  | 9.4                | 36.7       | BSW       | TIKKA H8-10 | 138      |
| 185/75R16C | 104/102 R | 100A2602    | 100A2602S              | 5.0                | 5.0 - 6.0            | 1,985/1,875   | 69                | 12.5             | 26.9                  | 7.2                | 25.1       | BSW       | TIKKA H8-10 | 132      |

**LI** Load Index **SR** Speed Rating **XL** Extra Load **BSW** Black Side Wall



## EXPERIENCE TREAD ACADEMY!

TreadAcademy.com is a resource for tire professionals to learn about and get certified on GT Radial's product offering.

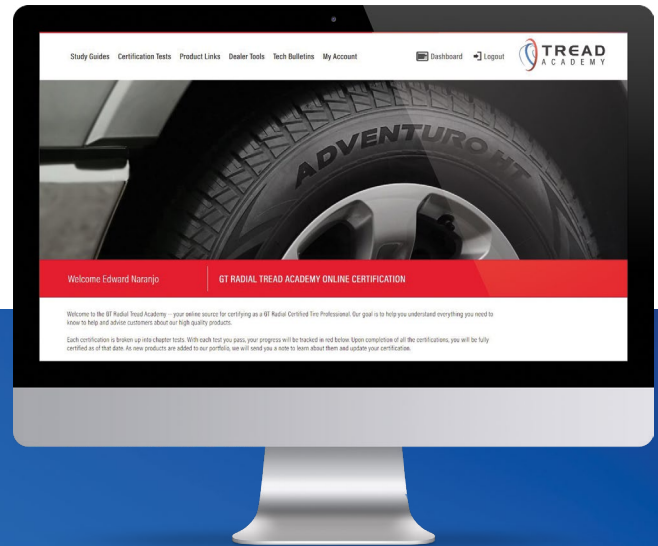

## GT RADIAL CERTIFIED PROFESSIONAL


Designed for tire dealers and technicians, our GT Radial Certified Professional program is a quick and straight forward way to learn the specifics about our products and take your certification test right here. Certification will help prepare your team with tools to sell and support GT Radial products with confidence.

## PASSENGER AND LIGHT TRUCK CERTIFICATION

Passenger and Light Truck tire certification starts with an introductory module that covers the basics, and includes product modules for just about every product we sell.

## DEALER TOOLS AND MORE



Product guides and catalogs are just a click away... including tech bulletins for passenger and light truck tires.

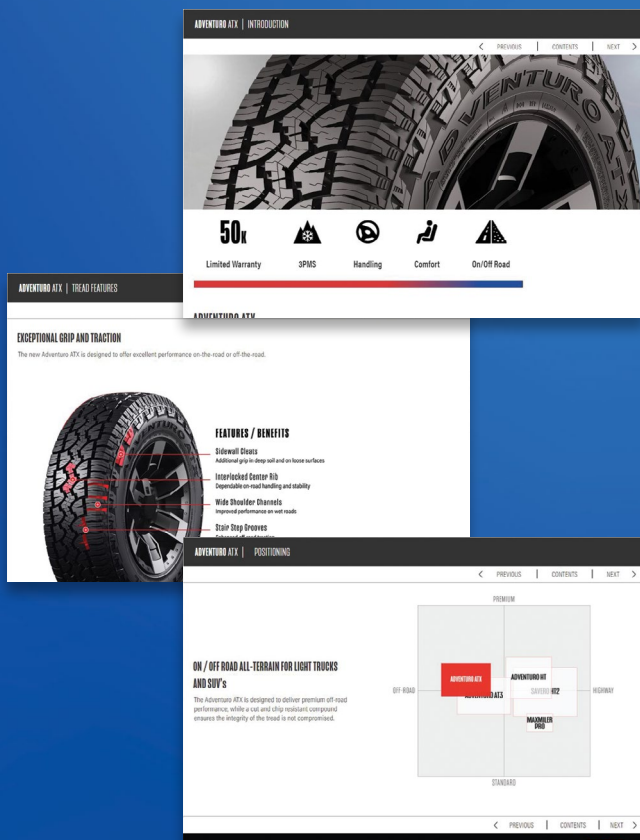


# TREADACADEMY.COM



# Positioning Charts

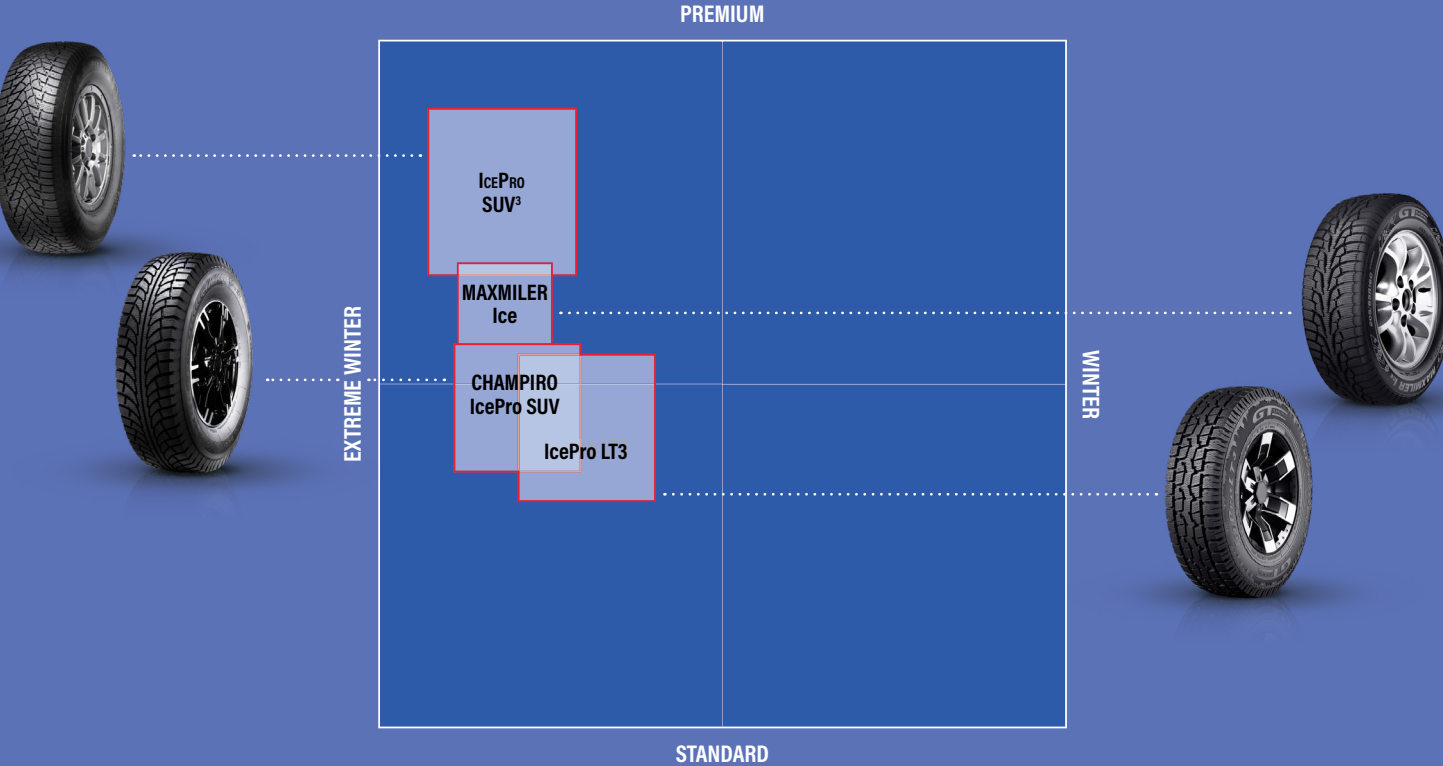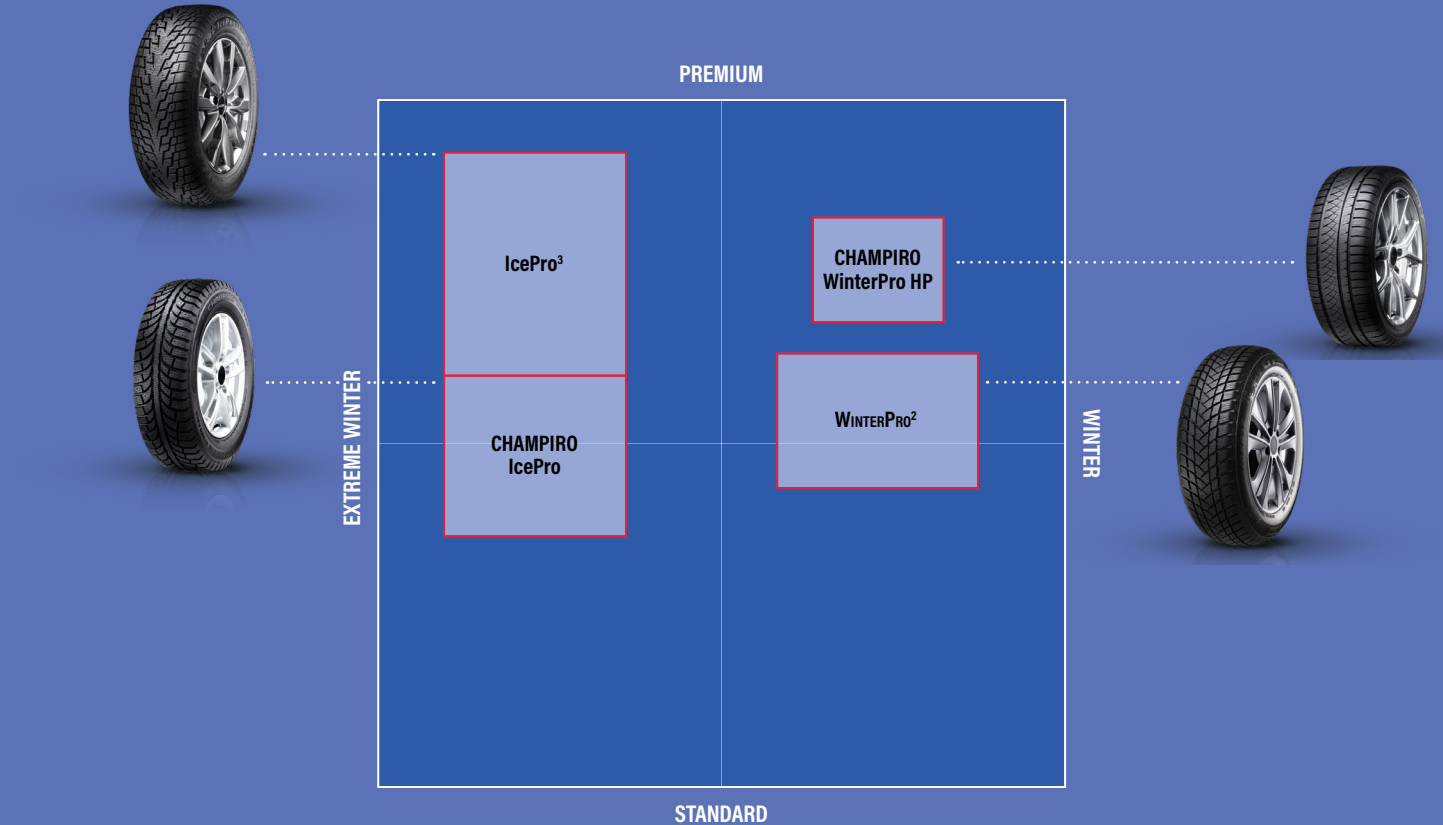

# Designations, Load Index & Speed Rating

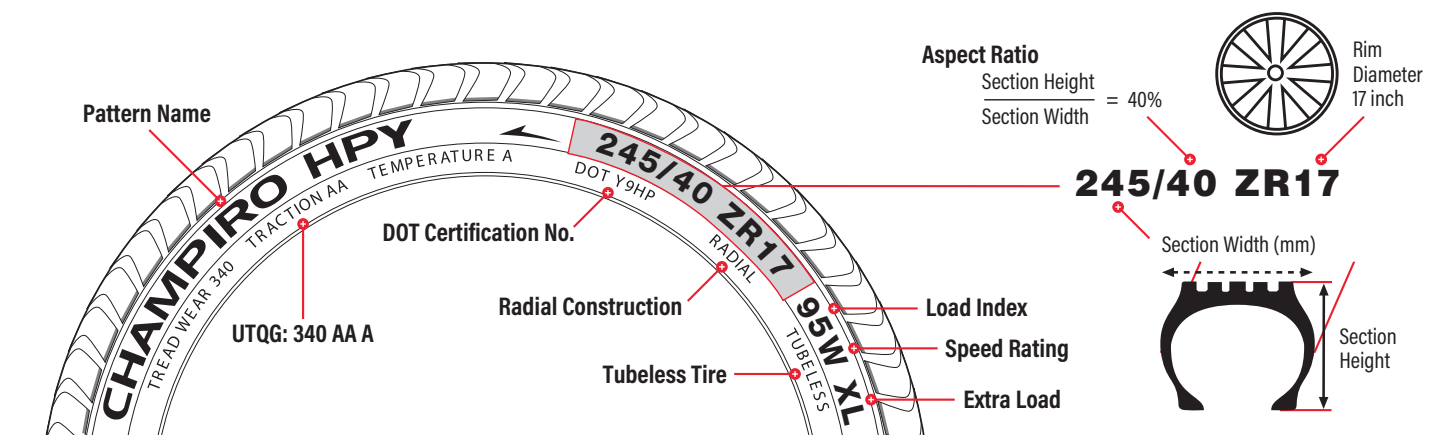

Before fitting, it is essential to check the different markings to ensure that the tire meets the maximum load and speed possibilities and/or the regulations in force.

## SAFETY WARNING

1. Never inflate beyond 40PSI (275kPa) to seat beads.
2. Tires should always be installed by qualified technicians following USTMA (formerly RMA) installation procedures.
3. Never mount tires on rims which are damaged or not smooth and clean.
4. Never mount a tire with a torn bead.
5. Never inflate a tire that is lying on the floor or other flat surface.
6. Always use a tire mounting machine with hold-down device or safety cage, or bolt to vehicle axle.

**MOUNT ONLY ON A RIM OF EXACT SAME DIAMETER AS THE TIRE.**

## Speed Rating System

| SR  | MPH       | KM/H      |
|-----|-----------|-----------|
| B   | 31        | 50        |
| C   | 37        | 60        |
| D   | 40        | 65        |
| E   | 43        | 70        |
| F   | 50        | 80        |
| G   | 56        | 90        |
| J   | 62        | 100       |
| K   | 68        | 110       |
| L   | 75        | 120       |
| M   | 81        | 130       |
| N   | 87        | 140       |
| P   | 93        | 150       |
| Q   | 100       | 160       |
| R   | 106       | 170       |
| S   | 113       | 180       |
| T   | 118       | 190       |
| U   | 124       | 200       |
| H   | 130       | 210       |
| V   | 149       | 240       |
| W   | 168       | 270       |
| Y   | 186       | 300       |
| (Y) | Above 186 | Above 300 |

## Load Capacity Index

| LI  | LBS   | KG  | LI  | LBS   | KG    |
|-----|-------|-----|-----|-------|-------|
| 67  | 677   | 307 | 101 | 1,819 | 825   |
| 68  | 694   | 315 | 102 | 1,874 | 850   |
| 69  | 716   | 325 | 103 | 1,929 | 875   |
| 70  | 739   | 335 | 104 | 1,984 | 900   |
| 71  | 761   | 345 | 105 | 2,039 | 925   |
| 72  | 783   | 355 | 106 | 2,094 | 950   |
| 73  | 805   | 365 | 107 | 2,150 | 975   |
| 74  | 827   | 375 | 108 | 2,205 | 1,000 |
| 75  | 852   | 387 | 109 | 2,271 | 1,030 |
| 76  | 882   | 400 | 110 | 2,337 | 1,060 |
| 77  | 908   | 412 | 111 | 2,403 | 1,090 |
| 78  | 937   | 425 | 112 | 2,469 | 1,120 |
| 79  | 964   | 437 | 113 | 2,535 | 1,150 |
| 80  | 992   | 450 | 114 | 2,601 | 1,180 |
| 81  | 1,018 | 462 | 115 | 2,679 | 1,215 |
| 82  | 1,047 | 475 | 116 | 2,756 | 1,250 |
| 83  | 1,073 | 487 | 117 | 2,833 | 1,285 |
| 84  | 1,102 | 500 | 118 | 2,910 | 1,320 |
| 85  | 1,135 | 515 | 119 | 2,998 | 1,360 |
| 86  | 1,168 | 530 | 120 | 3,086 | 1,400 |
| 87  | 1,201 | 545 | 121 | 3,197 | 1,450 |
| 88  | 1,235 | 560 | 122 | 3,307 | 1,500 |
| 89  | 1,279 | 580 | 123 | 3,417 | 1,550 |
| 90  | 1,323 | 600 | 124 | 3,527 | 1,600 |
| 91  | 1,356 | 615 | 125 | 3,658 | 1,650 |
| 92  | 1,389 | 630 | 126 | 3,748 | 1,700 |
| 93  | 1,433 | 650 | 127 | 3,858 | 1,750 |
| 94  | 1,477 | 670 | 128 | 3,968 | 1,800 |
| 95  | 1,521 | 690 | 129 | 4,079 | 1,850 |
| 96  | 1,565 | 710 | 130 | 4,189 | 1,900 |
| 97  | 1,609 | 730 | 131 | 4,299 | 1,950 |
| 98  | 1,653 | 750 | 132 | 4,409 | 2,000 |
| 99  | 1,764 | 775 | 133 | 4,542 | 2,060 |
| 100 | 1,819 | 800 | 134 | 4,674 | 2,120 |

## Load Capacity Index

| Load Range | Ply Rating | Load Range | Ply Rating |
|------------|------------|------------|------------|
| A          | 2          | G          | 14         |
| B          | 4          | H          | 16         |
| C          | 6          | J          | 18         |
| D          | 8          | L          | 20         |
| E          | 10         | M          | 22         |
| F          | 12         | N          | 24         |



# Warranty & Owner's Obligation

5yr

## 5 Year Limited Warranty

This Standard Limited Warranty Policy and Procedures ("Standard Limited Warranty") applies to all new Consumer tires (PCR/LTR) purchased on or after January 1, 2018, sold or distributed under the GT Radial brand bearing the corresponding D.O.T. tire identification number.

To be eligible, the following criteria must be met:

- Purchased in the United States or Canada;
- The tires were operated under normal service conditions and used on the same vehicle on which they were originally installed and according to the vehicle manufacturer's recommendations;
- The consumer is the original purchaser of the tire;
- The tires are of correct size, load and speed rating for the make and type of vehicle;
- The tires were used on the proper road surfaces for which they were designed;
- The tires are not subject to an exclusion (see "What is not covered by the Standard Limited Warranty");
- The warranty claim procedure found under "Owners Obligation" is completed in full.

### What Is Covered by the Standard Limited Warranty

Upon examination by the GT Radial representative, any eligible GT Radial tire that has become unusable due to a condition attributable to materials and/or workmanship within 60 months from the date of manufacturing of the tire (DOT), and before the tire wears down to 2/32 inch (1.6 mm), and not subject to the exclusions in section "What is not covered by the Standard Limited Warranty", will be replaced with an equivalent new GT Radial product on the basis set forth in this Limited Warranty.

Adjustment on ride comfort or out-of-round is allowed only during the first 2/32 inch of the original tread depth and within 12 months from the date of purchase (whichever comes first) supported with proof of purchase.

Any GT Radial tire that satisfies the above conditions which has become unusable due to conditions attributable to materials and/or workmanship will be replaced free of charge through a GT Radial Authorized Dealer. The cost of mounting and balancing and other service charges, disposal fees, or applicable taxes are payable by the consumer (i.e. vehicle owner / end user).

Any GT Radial tire that has been worn beyond the first 2/32 inch of the original usable tread depth which is adjusted under this Standard Limited Warranty due to workmanship and/or materials will be replaced with an equivalent new GT Radial product subject to a pro-rated charge through a GT Radial Authorized Dealer. The cost of mounting, balancing, and other service charges, disposal fees, or applicable taxes are payable by the consumer.

### What Is not Covered by the Standard Limited Warranty

This Standard Limited Warranty does not apply to consumer (PCR/LTR) tires which have become unserviceable under (but not limited to) the following conditions:

- Incorrect size or load rating for the vehicle;
- Road hazard injury (e.g., a cut, snag, bruise, impact damage or puncture). For selected products covered by the Road Hazard Warranty, please visit: <https://www.gtrradial-us.com/customer-information/warranty/>
- Improper use or operation, including improper inflation pressure, overloading, curbing, use of improper rim or wheel, improper mounting or demounting, tire/wheel spinning, misuse, misapplication, negligence, tire alteration, or use in competition or racing;
- Use in commercial applications for tread wear;
- Improper maintenance of tire, wheel, or vehicle components: misalignment, imbalance, worn components, or other vehicle conditions, characteristics or defects;
- Highway tires that are operated in on-off highway applications;
- Tires subjected to severe under-inflated or run-flat conditions;
- Improperly repaired tire;
- Uneven or rapid wear which is caused by mechanical irregularity in the vehicle such as wheel misalignment, (measured tread difference of 2/32 inch or more across the tread on the same tire);
- Accident, fire, chemical corrosion, or vandalism;
- Flat spotting caused by improper storage or brake lock;
- Contamination or degradation by petroleum products or other chemicals, solid or gaseous materials other than air, nitrogen or carbon dioxide (for example, water-based sealers or balancing substances);
- Ozone or weather cracking after 48 months from manufacturing date;
- With the serial number buffed, cut or illegible;
- Purchased or used outside the United States or Canada;
- With less than 2/32nds of an inch remaining tread in any groove;
- With a ride disturbance complaint that occurs after the first 2/32nds of tread wear;
- Damaged through use of any tube or flap;
- Damaged through improper use of tire chains;
- Use of Run Flat technology tires without a properly operating low air pressure warning system (TPMS - Tire Pressure Monitoring System).

See Owner's Obligation section for claim eligibility.

## Owner's Obligation

To make an eligible claim under this 5 Year Limited Warranty and/or Mileage Warranty:

- Owner is responsible for proper maintenance of tire and vehicle, and maintaining proper tire air pressure;
- Owner is responsible to have the tires rotated every 5,000 to 6,000 miles in accordance with prescribed rotation patterns as recommended by either the vehicle manufacturer or GT Radial. Owner must keep rotation records and present proof of such rotations for eventual warranty adjustments;
- When making a claim, the owner must present the tire(s) to be adjusted, with an original sales invoice showing the tire description, mounting mileage, and the date the tire(s) were installed, to an authorized GT Radial retailer. Once replaced, the tire(s) adjusted become property of GT Radial;
- Owner is responsible for paying all applicable taxes set forth under this Limited Warranty;
- Owner is also responsible for paying local tire-disposal fees and any parts or service, regardless of mileage or months of service. This includes payment for tire rotation, alignment, towing, road service, valve stems and tire repairs;
- The mounting, balancing, alignment, or any other services rendered to the vehicle shall be made by a service provider authorized to perform such services;
- No claim will be recognized unless submitted on a GT Radial claim form.

## Tire Registration

The registration of a consumer (PCR/LTR) tire is a very important safety precaution required by Federal law.

Tire registration will allow GT Radial to notify the owner in the unlikely event of a product return program. The Authorized Dealer will provide a tire registration card to record the D.O.T. tire identification number, along with the dealer's name and address.

The Owner is required to fill in his or her name and address, and mail to the address printed on the card or make the tire registration online at: <https://www.gtrradial-us.com/customer-information/tire-registration/>



## Limitations & Disclaimer

This Limited Warranty is not a warranty that a tire failure will not occur or become unserviceable.

THIS LIMITED WARRANTY IS IN LIEU OF, AND GITI TIRE (USA) HEREBY DISCLAIMS, TO THE EXTENT PERMITTED BY LAW, ANY AND ALL OTHER WARRANTIES AND REPRESENTATIONS, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE AND NON-INFRINGEMENT, AND NO OTHER WARRANTY OR REPRESENTATION OF ANY KIND IS MADE BY GITI TIRE (USA) OR WILL BE IMPLIED BY LAW. THE REMEDIES SET FORTH IN THIS LIMITED WARRANTY ARE THE SOLE AND EXCLUSIVE REMEDIES FOR BREACH OF WARRANTY. FURTHER, TO THE EXTENT PERMITTED BY LAW, GITI TIRE (USA) DISCLAIMS ANY LIABILITY FOR ANY INDIRECT DAMAGES, SPECIAL DAMAGES, PUNITIVE DAMAGES, INCIDENTAL DAMAGES, CONSEQUENTIAL DAMAGES, LOSS OF PROFITS, LOSS OF REVENUES, LOSS OF BUSINESS, LOSS OF GOODWILL OR REPUTATION, LOSS OF TIME, LOSS OF 4 VEHICLE USE, LOSS OF TIRE USE, INCONVENIENCE, OR OTHER COSTS, EXPENSES OR LOSSES OF ANY KIND.

Some states and provinces do not allow limitations on the duration of an implied warranty and/or the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you.

This Limited Warranty is the only express warranty applicable to GT Radial Brand tires and supersedes the terms of any previous warranty. GITI Tire (USA) does not authorize anyone to assume for it any warranty.

# WINTER



IcePro<sup>3</sup>



IcePro SUV<sup>3</sup>



WinterPro<sup>2</sup>



IcePro LT<sup>3</sup>





**CHAMPIRO IcePro**



**CHAMPIRO IcePro SUV**



**CHAMPIRO WinterPro HP**



**MAXMILER Ice**



# 2023



/GTRadialUSA



@gtradialusa



/GTRadialNorthAmerica

[WWW.GTRADIAL.COM](http://WWW.GTRADIAL.COM)

[contact@gtradial-us.com](mailto:contact@gtradial-us.com)