

**PASSENGER  
LIGHT TRUCK**

**PRODUCT GUIDE**

***EXPERIENCE  
THE PERFORMANCE***





# ***EXPERIENCE THE PERFORMANCE***









30 DAY TEST DRIVE . . . . .	6
-----------------------------	---

## SPORT

CHAMPIRO SX2 RS   EXTREME PERFORMANCE SUMMER . . . . .	10
CHAMPIRO SX2   EXTREME PERFORMANCE SUMMER . . . . .	12
CHAMPIRO HPY   MAX PERFORMANCE SUMMER . . . . .	14
CHAMPIRO UHP <sup>AS</sup>   ULTRA HIGH PERFORMANCE ALL-SEASON . . . . .	16

## COMFORT

MAXTOUR LX   GRAND TOURING & CUV ALL-SEASON . . . . .	18
MAXTOUR ALL SEASON   PASSENGER ALL-SEASON . . . . .	22
CHAMPIRO TOURING A/S   TOURING & CUV ALL-SEASON . . . . .	24

## SUV / PICKUP

ADVENTURO HT   HIGHWAY ALL-SEASON . . . . .	26
SAVERO HT2   HIGHWAY ALL-SEASON . . . . .	28
ADVENTURO ATX   ON / OFF ROAD ALL-TERRAIN . . . . .	30
ADVENTURO AT <sup>3</sup>   ON / OFF ROAD ALL-TERRAIN . . . . .	32

## PRO

MAXMILER PRO   COMMERCIAL VAN ALL-SEASON . . . . .	34
MAXMILER ST   TRAILER SERVICE . . . . .	36

TREAD ACADEMY . . . . .	38
-------------------------	----

DESIGNATIONS, LOAD INDEX & SPEED RATING . . . . .	39
---	----

WARRANTIES . . . . .	40
----------------------	----



**It's your call.**

**30<sub>DAY</sub>**  
Test Drive

**EXPERIENCE THE PERFORMANCE**

# 30 DAY TEST DRIVE

**UP TO 500 MILES OR 30 DAYS, WHICHEVER COMES FIRST.**

Buy a set of GT Radial tires and try them on your car or light truck.

Experience the performance of GT Radial tires for yourself. If you're not completely satisfied, just return them to the dealer where you bought them. Your GT Radial dealer will refund the purchase price—it's your call.

Visit [www.GTRadial-US.com/30daytestdrive](http://www.GTRadial-US.com/30daytestdrive) for more information.

**SATISFACTION  
GUARANTEED**



CHAMPRO HPY



CHAMPRO UHP<sup>AS</sup>



MAXTOUR LX



MAXTOUR ALL SEASON



CHAMPRO TOURING A/S



ADVENTURO HT



SAVERO HT2



ADVENTURO ATX



ADVENTURO AT<sup>3</sup>



# CHAMPIRO SX2 RS

SEE PAGE 10 EXTREME PERFORMANCE SUMMER



**FD** TIRE CUP  
CHAMPION





***COMING SOON***

GRAND TOURING & CUV ALL-WEATHER

**MAXCLIMATE**

# CHAMPIRO SX2 RS

EXTREME PERFORMANCE SUMMER

18 Inch 

Speed Rating: W 

35 - 40 Series 

UTQG: 200 A A UTQG



Extreme Grip



Dry



Wet



Handling

Champro SX2 RS is an evolution of the previous SX2 design. Utilizing all the strong points of the original SX2, the SX2 RS applies an all-new tread compound to refine the tire's performance. Keeping the extremely aggressive and proven asymmetric tread design, it offers increased cornering stability and grip in dry and wet conditions. Whether it's track days or professional drifting competition, the SX2 RS delivers the consistent traction and precise control you need.

## FEATURES / BENEFITS

### Dual Shoulder Blocks

Extra large shoulder blocks improve cornering stability and grip

### Wide Center Rib

Stable handling along with improved traction and braking performance

### Advanced Construction

Engineered to limit sidewall flex and enhance predictable handling

### Asymmetric Tread Pattern

Proven to deliver optimal performance on track and street

### High Performance Tread Compound

Race inspired compound formulated for both street and track

### Rim Flange Protector

Protects wheel against light curbing





EXTREME PERFORMANCE SUMMER **CHAMPIRO SX2 RS**

Tire Size	LI / SR	UTQG	Item Number	Measuring Rim inch	Rim Width Range inch	Max. Load lbs	Max. Pressure psi	Tread Depth 32nd	Overall Diameter inch	Section Width inch	Weight lbs	Side Wall
255/35R18	94W XL	200 A A	100UA3685	9.0	8.5 - 10.0	1,477	50	7	25.0	10.4	24.7	BSW
245/40ZR18	93W	200 A A	100UA3683	8.5	8.0 - 9.5	1,433	51	7	25.7	9.7	25.4	BSW
295/40ZR18	103W	200 A A	100UA3680	10.5	10.0 - 11.5	1,930	51	7	27.4	11.8	31.1	BSW

LI Load Index SR Speed Rating UTQG Uniform Tire Quality Grade BSW Black Side Wall



**FD** TIRE CUP  
CHAMPION

AN **OFFICIAL** TIRE OF **FORMULA DRIFT**

THE **OFFICIAL** TIRE OF **FD** | **PROSPEC**

# CHAMPIRO SX2

EXTREME PERFORMANCE SUMMER

15 / 17 / 18 Inch 

Speed Rating: W 

35 - 50 Series 

UTQG: 200 A A - 260 A A UTQG



Extreme Grip



Dry



Wet



Handling

Champro SX2 is for drivers who need higher levels of grip, traction, response and control in dry and wet conditions. With an extremely aggressive asymmetric tread design for increased cornering stability and high-grip silica compound that gives consistent performance, it is suitable for track days, spirited driving and normal street use. When you're an enthusiast, traction and control is the name of the game.

## FEATURES / BENEFITS

### Dual Shoulder Blocks

Extra large shoulder blocks increase cornering stability and grip

### Wide Center Rib

Improved handling, traction and braking performance

### Gradient Step

Reduced heat generation in central tread ribs

### Asymmetric Tread Pattern

Tuned for optimal performance on track and street

### Silica Compound

Increased traction and grip in both dry and wet



EXTREME PERFORMANCE SUMMER **CHAMPIRO SX2**

Tire Size	LI / SR	UTQG	Item Number	Measuring Rim inch	Rim Width Range inch	Max. Load lbs	Max. Pressure psi	Tread Depth 32nd	Overall Diameter inch	Section Width inch	Weight lbs	Side Wall
195/50ZR15	82W	200 A A	A129	6.0	5.5 - 7.0	1,047	51	8	22.6	7.9	18.7	BSW
235/40ZR17	90W	200 A A	A326	8.5	8.0 - 9.5	1,323	51	8	24.4	9.5	24.7	BSW
245/40ZR17	91W	260 A A	B612	8.5	8.0 - 9.5	1,356	51	8	24.7	9.8	26.2	BSW
215/45ZR17	87W	260 A A	B610	7.0	7.0 - 8.0	1,201	51	8	24.6	8.4	23.0	BSW
225/45ZR17	91W	260 A A	B611	7.5	7.0 - 8.5	1,356	51	8	25.0	8.9	24.6	BSW
235/45ZR17	94W	200 A A	A227	8.0	7.5 - 9.0	1,477	51	8	25.4	9.3	26.1	BSW
265/35ZR18	97W XL	260 A A	B602	9.5	9.0 - 10.5	1,609	49	8	25.3	10.7	27.4	BSW
235/40ZR18	91W	200 A A	B603	8.5	8.0 - 9.5	1,356	51	8	25.4	9.5	26.7	BSW
245/40ZR18	93W	200 A A	A328	8.5	8.0 - 9.5	1433	51	8	25.7	9.8	27.7	BSW

**LI** Load Index **SR** Speed Rating **XL** Extra Load **UTQG** Uniform Tire Quality Grade **BSW** Black Side Wall





# CHAMPIRO HPY

MAX PERFORMANCE SUMMER

30<sup>DAY</sup>

Test Drive

17 - 20 Inch 

Speed Rating: V / W / Y 

35 - 65 Series 

UTQG: 300 AA A UTQG



Dry



Wet



Handling



Noise

Champiro HPY is a proven ultra high performance summer tire that provides excellent control, turn-in and grip in the curves. With an asymmetric tread design, it also has great straight-line stability and a silica tread compound that performs in both wet and dry conditions. Champiro HPY is a great choice to step up the capability of any high performance sports car, sedan or SUV.

## FEATURES / BENEFITS

### Asymmetric Tread Pattern

Provides outstanding wet and dry cornering and low noise

### Solid Center Rib

Improved straight line stability and steering response

### Stiff Tread Blocks

Excellent cornering stability at high speeds

### Additional Shoulder Channels

Evacuates water to reduce hydroplaning

### Silica Compound

Enhanced grip on wet surfaces



Tire Size	LI / SR	UTQG	Item Number	Measuring Rim inch	Rim Width Range inch	Max. Load lbs	Max. Pressure psi	Tread Depth 32nd	Overall Diameter inch	Section Width inch	Weight lbs	Side Wall
245/40ZR17	95Y XL	300 AA A	B059	8.5	8.0 - 9.5	1,521	49	10	24.7	9.8	25.5	BSW
255/40ZR17	98Y XL	300 AA A	B026	9.0	8.5 - 10.0	1,653	49	10	25.0	10.2	26.3	BSW
205/45ZR17	88W XL	300 AA A	B349	7.0	6.5 - 7.5	1,235	49	10	24.3	8.1	20.2	BSW
215/45ZR17	91Y XL	300 AA A	B058	7.0	7.0 - 8.0	1,356	49	10	24.6	8.4	22.2	BSW
225/45ZR17	94Y XL	300 AA A	B057	7.5	7.0 - 8.5	1,477	49	10	25.0	8.9	23.4	BSW
235/45ZR17	97Y XL	300 AA A	B046	8.0	7.5 - 9.0	1,609	49	10	25.4	9.3	24.8	BSW
245/45ZR17	99Y XL	300 AA A	B045	8.0	7.5 - 9.0	1,709	49	10	25.7	9.6	26.4	BSW
205/50ZR17	93W XL	300 AA A	B350	6.5	5.5 - 7.5	1,433	49	10	25.1	8.4	21.8	BSW
225/50ZR17	98Y XL	300 AA A	B027	7.0	6.0 - 8.0	1,653	49	10	25.9	9.2	26.1	BSW
235/50ZR17	100W XL	300 AA A	B028	7.5	6.5 - 8.5	1,764	49	10	26.3	9.5	26.2	BSW
215/55ZR17	94W	300 AA A	B109	7.0	6.0 - 7.5	1,477	44	10	26.3	8.9	23.6	BSW
225/65R17	102V	300 AA A	B347	6.5	6.0 - 8.0	1,874	44	10	28.5	9.0	28.8	BSW
235/65R17	108V XL	300 AA A	B344	7.0	6.5 - 8.5	2,205	49	10	29.1	9.4	30.7	BSW
255/35ZR18	94Y XL	300 AA A	B030	9.0	8.5 - 10.0	1,477	49	10	25.0	10.2	24.3	BSW
265/35ZR18	97Y XL	300 AA A	B048	9.5	9.0 - 10.5	1,609	49	10	25.7	10.7	27.7	BSW
205/40ZR18	86Y XL	300 AA A	B352	7.5	7.0 - 8.0	1,168	49	10	24.4	8.3	20.3	BSW
225/40ZR18	92Y XL	300 AA A	B023	8.0	7.5 - 9.0	1,389	49	10	25.1	9.1	23.7	BSW
235/40ZR18	95Y XL	300 AA A	B022	8.5	8.0 - 9.5	1,521	49	10	25.4	9.5	24.9	BSW
245/40ZR18	97Y XL	300 AA A	B024	8.5	8.0 - 9.5	1,609	49	10	25.7	9.8	24.4	BSW
225/45ZR18	91Y	300 AA A	B054	7.5	7.0 - 8.5	1,356	51	10	25.9	8.9	24.8	BSW
245/45ZR18	100Y XL	300 AA A	B029	8.0	7.5 - 9.0	1,764	49	10	26.7	9.6	27.8	BSW
255/45ZR18	103Y XL	300 AA A	B055	8.5	8.0 - 9.5	1,929	49	10	27.0	10.0	28.8	BSW
235/50ZR18	101Y XL	300 AA A	B056	7.5	6.5 - 8.5	1,819	49	10	27.4	9.4	27.7	BSW
235/55ZR18	104W XL	300 AA A	B346	7.5	6.5 - 8.5	1,984	49	10	28.1	9.6	29.3	BSW
255/55ZR18	109Y XL	300 AA A	B342	8.0	7.0 - 9.0	2,271	49	10	29.0	10.4	32.9	BSW
235/60R18	107V XL	300 AA A	B345	7.0	6.5 - 8.5	2,149	49	10	29.1	9.4	30.4	BSW
225/35ZR19	88Y XL	300 AA A	B049	8.0	7.5 - 9.0	1,235	49	10	25.2	9.1	23.3	BSW
235/35ZR19	91Y XL	300 AA A	B050	8.5	8.0 - 9.5	1,356	49	10	25.5	9.5	24.2	BSW
255/35ZR19	96Y XL	300 AA A	B051	9.0	8.5 - 10.0	1,565	49	10	26.0	10.2	27.5	BSW
225/40ZR19	93Y XL	300 AA A	B025	8.0	7.5 - 9.0	1,433	49	10	26.1	9.1	23.0	BSW
255/40ZR19	96Y	300 AA A	B053	9.0	8.5 - 10.0	1,565	51	10	27.0	10.2	29.5	BSW
255/50ZR19	107Y XL	300 AA A	B343	8.0	7.0 - 9.0	2,149	49	10	29.1	10.4	32.8	BSW
255/35ZR20	97Y XL	300 AA A	B052	9.0	8.5 - 10.0	1,609	49	10	27.0	10.2	28.8	BSW
255/45ZR20	101Y	300 AA A	B348	8.5	8.0 - 9.5	1,819	44	10	29.1	10.0	32.0	BSW

**LI** Load Index **SR** Speed Rating **XL** Extra Load **UTQG** Uniform Tire Quality Grade **BSW** Black Side Wall

# CHAMPIRO UHP<sup>AS</sup>

ULTRA HIGH PERFORMANCE ALL-SEASON

15 - 20 Inch 

Speed Rating: V / W / Y 

40 - 55 Series 

UTQG: 500 A A UTQG

M+S Rated M+S

45k

Limited  
Warranty



Wet



Handling



Comfort



Road Hazard  
Warranty

24HR

Roadside  
Assistance

30DAY

Test Drive

Champro UHP<sup>AS</sup> is for drivers who are looking for an ultra high performance tire and also need the practicality of all-season performance and better wear life. The advanced and stylish tread design delivers in dry, wet and light snow conditions and is backed by a 45,000 mile tread life warranty. The advanced Nanometer Silica tread compound improves grip and the full depth sipes aid in providing all-season performance.

## FEATURES / BENEFITS

### Variable Pitch Technology

Reduced road noise for a quieter ride

### Rim Protector

Protect wheel from curb damage

### Large Shoulder Blocks

Increased rigidity for precise handling

### Full Depth Sipes

Biting edges for grip throughout the life of the tire

### Nanometer Silica Compound

Improved wet grip and reduced rolling resistance





ULTRA HIGH PERFORMANCE ALL-SEASON **CHAMPIRO UHP<sup>AS</sup>**

Tire Size	LI / SR	UTQG	Item Number	Measuring Rim inch	Rim Width Range inch	Max. Load lbs	Max. Pressure psi	Tread Depth 32nd	Overall Diameter inch	Section Width inch	Weight lbs	Side Wall
195/55R15	85V	500 A A	AS041	6.0	5.5 - 7.0	1,135	44	10	23.4	7.9	18.9	BSW
205/50R16	87V	500 A A	AS039	6.5	5.5 - 7.5	1,201	44	10	24.1	8.4	20.5	BSW
225/50ZR16	92W	500 A A	AS044	7.0	6.0 - 8.0	1,389	51	10	24.9	9.2	25.5	BSW
205/55R16	91V	500 A A	AS032	6.5	5.5 - 7.5	1,356	44	10	24.9	8.4	21.8	BSW
225/55ZR16	95W	500 A A	AS042	7.0	6.0 - 8.0	1,521	51	10	25.7	9.2	26.3	BSW
215/45ZR17	91W XL	500 A A	AS031	7.0	7.0 - 8.0	1,356	50	10	24.6	8.4	21.5	BSW
225/45ZR17	94W XL	500 A A	AS033	7.5	7.0 - 8.5	1,477	50	10	25.0	8.9	23.7	BSW
235/45ZR17	97W XL	500 A A	AS036	8.0	7.5 - 9.0	1,609	50	10	25.4	9.3	25.2	BSW
245/45ZR17	95W	500 A A	AS046	8.0	7.5 - 9.0	1,521	51	10	25.7	9.6	26.2	BSW
205/50ZR17	93W XL	500 A A	AS037	6.5	5.5 - 7.5	1,433	50	10	25.1	8.4	23.5	BSW
215/50ZR17	91W	500 A A	AS035	7.0	6.0 - 7.5	1,356	51	10	25.5	8.9	23.1	BSW
225/50ZR17	94W	500 A A	AS030	7.0	6.0 - 8.0	1,477	51	10	25.9	9.2	26.6	BSW
215/55R17	94V	500 A A	AS029	7.0	6.0 - 7.5	1,477	44	10	26.3	8.9	25.6	BSW
225/55ZR17	97W	500 A A	AS034	7.0	6.0 - 8.0	1,609	51	10	26.8	9.2	27.1	BSW
235/55ZR17	99W	500 A A	AS050	7.5	6.5 - 8.5	1,709	51	10	27.2	9.6	28.4	BSW
225/40ZR18	92Y XL	500 A A	AS040	8.0	7.5 - 9.0	1,389	50	10	25.1	9.1	24.4	BSW
235/40ZR18	95Y XL	500 A A	AS048	8.5	8.0 - 9.5	1,521	50	10	25.4	9.5	26.0	BSW
245/40ZR18	97Y XL	500 A A	AS047	8.5	8.0 - 9.5	1,609	50	10	25.7	9.8	27.5	BSW
215/45ZR18	93Y XL	500 A A	AS057	7.0	7.0 - 8.0	1,433	50	10	25.6	8.4	23.7	BSW
225/45ZR18	91W	500 A A	AS043	7.5	7.0 - 8.5	1,356	51	10	25.9	8.9	24.9	BSW
235/45ZR18	94W	500 A A	AS056	8.0	7.5 - 9.0	1,477	51	10	26.3	9.3	26.0	BSW
245/45ZR18	96Y	500 A A	AS038	8.0	7.5 - 9.0	1,565	51	10	26.7	9.6	28.3	BSW
255/45ZR18	99Y	500 A A	AS053	8.5	8.0 - 9.5	1,709	51	10	27.0	10.0	30.2	BSW
225/50ZR18	95W	500 A A	AS049	7.0	6.0 - 8.0	1,521	51	10	26.9	9.2	27.9	BSW
235/50ZR18	101W XL	500 A A	AS045	7.5	6.5 - 8.5	1,819	50	10	27.3	9.6	29.1	BSW
245/40ZR19	94Y	500 A A	AS052	8.5	8.0 - 9.5	1,477	51	10	26.7	9.8	28.7	BSW
255/40ZR19	100Y XL	500 A A	AS055	9.0	8.5 - 10.0	1,764	50	10	27.0	10.2	30.1	BSW
245/45ZR19	98Y	500 A A	AS054	8.0	7.5 - 9.0	1,653	51	10	27.7	9.6	29.9	BSW
275/40ZR20	106Y XL	500 A A	AS028	9.5	9.0 - 11.0	2,094	50	10	28.7	10.9	33.3	BSW
245/45ZR20	103Y XL	500 A A	AS051	8.0	7.5 - 9.0	1,929	50	10	28.7	9.6	31.2	BSW

**LI** Load Index **SR** Speed Rating **XL** Extra Load **UTQG** Uniform Tire Quality Grade **BSW** Black Side Wall

# MAXTOUR LX

GRAND TOURING & CUV ALL-SEASON

15 - 21 Inch 

Speed Rating: T / H / V / W 

35 - 70 Series 

UTQG: 600 A A UTQG

M+S Rated M+S

**70k**  
Limited  
Warranty

  
Road Hazard  
Warranty

  
Wet

  
Noise

**24HR**  
Roadside  
Assistance

**30DAY**  
Test Drive

Maxtour LX delivers a premium ride and all-season performance with a 70,000 mile tread life warranty. It features full depth sipes for excellent traction in the wet and light snow, and the Harmonically Optimized Pitch Sequencing design limits road noise for the life of the tire. With fitments for popular passenger cars and CUV's and Road Hazard Warranty included, you'll enjoy worry-free luxury performance.



## FEATURES / BENEFITS

### Asymmetric Tread Pattern

Tuned for optimal all-season performance

### Full Depth Sipes

Biting edges for grip throughout the life of the tire

### Stiff Tread Blocks

Precise vehicle handling and steering response

### Additional Shoulder Channels

Evacuates water to reduce hydroplaning

### Independent Shoulder Groove

Improved vehicle handling

### Harmonically Optimized Pitch Sequencing

Reduced road noise generation for a quieter ride

Tire Size	LI / SR	UTQG	Item Number	Measuring Rim inch	Rim Width Range inch	Max. Load lbs	Max. Pressure psi	Tread Depth 32nd	Overall Diameter inch	Section Width inch	Weight lbs	Side Wall
185/60R15	84H	600 A A	AS115	5.5	5.0 - 6.5	1,102	44	10	23.7	7.4	17.2	BSW
195/65R15	91H	600 A A	AS178	6.0	5.5 - 7.0	1,356	44	10	25.0	7.9	19.2	BSW
195/55R16	87V	600 A A	AS116	6.0	5.5 - 7.0	1,201	44	10	24.4	7.9	18.7	BSW
205/55R16	91V	600 A A	100UA3537	6.5	5.5 - 7.5	1,356	44	10	24.9	8.4	19.7	BSW
215/55R16	93H	600 A A	AS119	7.0	6.0 - 7.5	1,433	44	10	25.3	8.9	22.7	BSW
205/60R16	92V	600 A A	AS117	6.0	5.5 - 7.5	1,389	44	10	25.7	8.2	22.3	BSW
215/60R16	95V	600 A A	100UA3536	6.5	6.0 - 7.5	1,521	44	10	26.1	8.6	22.0	BSW
225/60R16	98H	600 A A	100UA3538	6.5	6.0 - 8.0	1,653	44	10	26.6	9.0	23.1	BSW
205/65R16	95H	600 A A	AS118	6.0	5.5 - 7.5	1,521	44	10	26.5	8.2	22.4	BSW
215/65R16	98H	600 A A	100UA3540	6.5	6.0 - 7.5	1,653	44	10	26.9	8.6	22.8	BSW
225/65R16	100H	600 A A	100UA3548	6.5	6.0 - 8.0	1,764	44	10	27.5	8.9	24.4	BSW
235/65R16	103T	600 A A	AS179	7.0	6.5 - 8.5	1,929	44	10	28.0	9.5	27.3	BSW
205/70R16	97H	600 A A	AS180	6.0	5.0 - 7.0	1,609	44	10	27.3	8.2	23.6	BSW
215/45R17	87V	600 A A	100UA3504	7.0	7.0 - 8.0	1,201	44	10	24.7	8.4	19.6	BSW
225/45R17	91V	600 A A	100UA3502	7.5	7.0 - 8.5	1,356	44	10	24.9	8.9	23.1	BSW
205/50R17	93V XL	600 A A	100UA3526	6.5	5.5 - 7.5	1,433	50	10	25.1	8.4	21.2	BSW
215/50R17	95V XL	600 A A	100UA3525	7.0	6.0 - 7.5	1,521	50	10	25.5	8.7	22.4	BSW
225/50R17	94V	600 A A	100UA3524	7.0	6.0 - 8.0	1,477	44	10	26.0	9.0	23.3	BSW
235/50R17	96V	600 A A	AS112	7.5	6.5 - 8.5	1,565	44	10	26.3	9.7	25.6	BSW
215/55R17	94V	600 A A	100UA3521	7.0	6.0 - 7.5	1,477	44	10	26.3	8.8	23.4	BSW
225/55R17	97V	600 A A	100UA3523	7.0	6.0 - 8.0	1,609	44	10	26.9	9.0	24.3	BSW
235/55R17	99H	600 A A	AS120	7.5	6.5 - 8.5	1,709	44	10	27.2	9.6	26.9	BSW
215/60R17	96H	600 A A	100UA3545	6.5	6.0 - 7.5	1,565	44	10	27.1	8.6	23.5	BSW
225/60R17	99H	600 A A	100UA3522	6.5	6.0 - 8.0	1,709	44	10	27.5	8.9	24.2	BSW
235/60R17	102H	600 A A	100UA3546	7.0	6.5 - 8.5	1,874	44	10	28.1	9.4	25.7	BSW
215/65R17	99H	600 A A	100UA3547	6.5	6.0 - 7.5	1,709	44	10	28.0	8.7	24.1	BSW
225/65R17	102H	600 A A	100UA3539	6.5	6.0 - 8.0	1,874	44	10	28.5	9.0	25.3	BSW
235/65R17	104H	600 A A	100UA3542	7.0	6.5 - 8.5	1,984	44	10	29.0	9.4	27.2	BSW
225/40R18	92V XL	600 A A	100UA3532	8.0	7.5 - 9.0	1,389	50	10	25.1	9.1	24.4	BSW
235/40R18	91W											
245/40R18	97V											
225/45R18	95V XL	600 A A	AS107	7.5	7.0 - 8.5	1,521	50	10	26.1	9.0	26.0	BSW
235/45R18	94V	600 A A	AS122	8.0	7.5 - 9.0	1,477	44	10	26.3	9.3	26.5	BSW
235/45R18	98W XL											
235/45R18	94V	600 A A	AS201	8.0	7.5 - 9.0	1,477	44	10	26.3	9.3	23.6	BSW
235/45R18	94V	600 A A	100UA3500	8.0	7.5 - 9.0	1,477	44	10	26.3	9.3	23.3	BSW
245/45R18	96V	600 A A	AS111	8.0	7.5 - 9.0	1,565	44	11	26.7	9.6	26.2	BSW
245/45R18	100V XL											
225/50R18	95V	600 A A	AS113	7.0	6.0 - 8.0	1,521	44	10	26.9	9.2	25.1	BSW
235/50R18	97V	600 A A	AS123	7.5	6.5 - 8.5	1,609	44	10	27.3	9.7	26.7	BSW
235/50R18	97W											
215/55R18	95H	600 A A	100UA3556	7.0	6.0 - 7.5	1,521	44	10	27.3	8.9	25.5	BSW
225/55R18	98V	600 A A	100UA3512	7.0	6.0 - 8.0	1,653	44	10	27.8	9.0	26.3	BSW
235/55R18	100H	600 A A	100UA3527	7.5	6.5 - 8.5	1,764	44	10	28.1	9.7	26.9	BSW
225/60R18	100H	600 A A	AS121	6.5	6.0 - 8.0	1,764	44	10	28.6	9.0	27.3	BSW
235/60R18	103V	600 A A	100UA3552	7.0	6.5 - 8.5	1,929	44	10	29.1	9.3	27.2	BSW
245/60R18	105H	600 A A	100UA3553	7.0	7.0 - 8.5	2,039	44	10	29.6	9.8	29.9	BSW
235/65R18	106H	600 A A	100UA3554	7.0	6.5 - 8.5	2,094	44	10	30.1	9.4	29.1	BSW

LI Load Index SR Speed Rating XL Extra Load UTQG Uniform Tire Quality Grade BSW Black Side Wall

Continued on next page

COMING SOON

Continued from previous page

GRAND TOURING & CUV ALL-SEASON **MAXTOUR LX**

Tire Size	LI / SR	UTQG	Item Number	Measuring Rim inch	Rim Width Range inch	Max. Load lbs	Max. Pressure psi	Tread Depth 32nd	Overall Diameter inch	Section Width inch	Weight lbs	Side Wall
235/40R19	96V XL	600 A A	100UA3506	8.5	8.0 - 9.5	1565	50	10	26.4	9.5	23.0	BSW
235/40R19	96W XL											
245/40R19	98V XL											
245/40R19	94W											
255/40R19	96W											
225/45R19	92W											
235/45R19	95H	600 A A	100UA3557	8.0	7.5 - 9.0	1,521	44	10	27.4	9.3	25.0	BSW
245/45R19	102V XL	600 A A	AS110	8.0	7.5 - 9.0	1,874	50	10	27.7	9.6	27.8	BSW
255/45R19	104W XL											
235/50R19	99H	600 A A	100UA3558	7.5	6.5 - 8.5	1,709	44	10	28.3	9.4	25.0	BSW
255/50R19	107V XL	600 A A	100UA3513	8.0	7.0 - 9.0	2,149	50	10	28.9	10.8	29.3	BSW
225/55R19	99V	600 A A	AS109	7.0	6.0 - 8.0	1,709	44	10	28.8	9.2	28.2	BSW
225/55R19	103V XL											
235/55R19	101V	600 A A	100UA3508	7.5	6.5 - 8.5	1,819	44	10	29.1	9.5	28.4	BSW
245/55R19	103V	600 A A	100UA3560	7.5	7.0 - 8.5	1,929	44	10	28.6	10.3	29.6	BSW
255/40R20	101W XL											
245/45R20	99V	600 A A	AS114	8.0	7.5 - 9.0	1,709	44	10	28.7	9.6	28.4	BSW
245/45R20	103V XL											
255/45R20	105V											
255/45R20	101W											
265/45R20	108V XL											
245/50R20	102V	600 A A	AS108	7.5	7.0 - 8.5	1,874	44	10	29.7	10.0	31.5	BSW
255/50R20	105V	600 A A	100UA3507	8.0	7.0 - 9.0	2,039	44	10	30.1	10.4	31.0	BSW
265/50R20	107V											
235/55R20	102V	600 A A	100UA3515	7.5	6.5 - 8.5	1,874	44	10	30.1	9.5	29.7	BSW
255/55R20	110V XL	600 A A	100UA3562	8.0	7.0 - 9.0	2,337	50	11	30.8	10.8	31.9	BSW
255/35R21	98W XL											
275/35R21	103W XL											
275/45R21	110W XL											

**LI** Load Index **SR** Speed Rating **XL** Extra Load **UTQG** Uniform Tire Quality Grade **BSW** Black Side Wall

COMING SOON







# MAXTOUR All Season

PASSENGER ALL-SEASON

13 - 16 Inch 

Speed Rating: T / H 

60 - 75 Series 

UTQG: 520 A A - 580 A B UTQG

M+S Rated **M+S**

**60k**  
Limited  
Warranty



Comfort

**30**  
DAY

Test Drive

Maxtour All Season offers great mileage, improved all-season performance, a quiet, comfortable ride and represents an outstanding value. Backed by a 60,000 mile tread life warranty and a Road Hazard Warranty, you can drive with ease of mind when you're on Maxtour All Season.

## FEATURES / BENEFITS

### Variable Pitch Technology

Reduced tire noise

### Zig-Zag Sipes

Additional biting edges for improved traction

### Lateral Grooves

Evacuates water and slush to improve wet and light snow traction

### All-Season Compound

Enhanced performance in wet and light snow conditions



PASSENGER ALL-SEASON **MAXTOUR All Season**

Tire Size	LI / SR	UTQG	Item Number	Measuring Rim inch	Rim Width Range inch	Max. Load lbs	Max. Pressure psi	Tread Depth 32nd	Overall Diameter inch	Section Width inch	Weight lbs	Side Wall
175/70R13	82T	580 A B	AS065	5.0	4.5 - 6.0	1,047	44	10	22.7	7.0	14.9	BSW
175/65R14	82T	580 A B	AS064	5.0	5.0 - 6.0	1,047	44	10	23.0	7.0	15.6	BSW
175/70R14	84T	580 A B	AS066	5.0	4.5 - 6.0	1,102	44	10	23.7	7.0	16.1	BSW
185/70R14	88H	520 A A	AS070	5.5	4.5 - 6.0	1,235	44	10	24.3	7.4	17.3	BSW
195/70R14	91T	580 A B	AS071	6.0	5.0 - 6.5	1,356	44	10	24.8	7.9	18.4	BSW
185/60R15	84T	580 A B	AS067	5.5	5.0 - 6.5	1,102	44	10	23.7	7.4	17.4	BSW
195/60R15	88T	580 A B	AS058	6.0	5.5 - 7.0	1,235	44	10	24.2	7.9	18.1	BSW
205/60R15	91H	520 A A	AS072	6.0	5.5 - 7.5	1,356	44	10	24.7	8.2	19.8	BSW
185/65R15	88T	580 A B	AS069	5.5	5.0 - 6.5	1,235	44	10	24.5	7.4	18.0	BSW
185/65R15	88H	520 A A	AS068	5.5	5.0 - 6.5	1,235	44	10	24.5	7.4	18.0	BSW
195/65R15	91T	580 A B	AS059	6.0	5.5 - 7.0	1,356	44	10	25.0	7.9	19.4	BSW
205/65R15	94T	580 A B	AS061	6.0	5.5 - 7.5	1,477	44	10	25.5	8.2	21.7	BSW
215/65R15	96T	580 A B	AS075	6.5	6.0 - 7.5	1,565	44	10	26.0	8.7	23.4	BSW
205/70R15	96T	580 A B	AS073	6.0	5.0 - 7.0	1,565	44	10	26.3	8.2	22.0	BSW
205/75R15	97T	580 A B	AS074	5.5	5.0 - 7.0	1,609	44	10	27.1	8.0	22.8	BSW
215/75R15	100T	580 A B	AS076	6.0	5.5 - 7.0	1,764	44	10	27.7	8.5	24.1	BSW
205/60R16	92T	580 A B	AS060	6.0	5.5 - 7.5	1,389	44	10	25.7	8.2	20.9	BSW
215/60R16	95T	580 A B	AS062	6.5	6.0 - 7.5	1,521	44	10	26.1	8.7	23.3	BSW
225/60R16	98T	580 A B	AS063	6.5	6.0 - 8.0	1,653	44	10	26.6	9.0	24.6	BSW

**LI** Load Index **SR** Speed Rating **UTQG** Uniform Tire Quality Grade **BSW** Black Side Wall

# CHAMPIRO TOURING A/S

TOURING & CUV ALL-SEASON

**30**  
DAY

Test Drive

14 - 20 Inch 

Speed Rating: T / H / V 

45 - 70 Series 

UTQG: 540 A A **UTQG**

M+S Rated **M+S**

**60k**

Limited  
Warranty



Comfort

Champiro Touring A/S is an all season touring tire designed for the latest passenger cars and crossover vehicles. It combines precise handling and control with a quiet and comfortable ride. Backed by a 60,000 mile limited warranty, the Champiro Touring A/S also delivers great mileage for an outstanding value.

## FEATURES / BENEFITS

### Full Depth Sipes

Improved grip and biting edges for all-season performance

### Tread Grooves

Wide circumferential grooves ensure water drainage and improved wet performance

### Large Shoulder Blocks

Increased tread pattern stiffness for improved handling and cornering

### Variable Pitch Tread Blocks

Reduced tread pattern noise for a quiet ride





TOURING & CUV ALL-SEASON **CHAMPIRO TOURING A/S**

Tire Size	LI / SR	UTQG	Item Number	Measuring Rim inch	Rim Width Range inch	Max. Load lbs	Max. Pressure psi	Tread Depth 32nd	Overall Diameter inch	Section Width inch	Weight lbs	Side Wall
185/65R14	86H	540 A A	B513	5.5	5.0 - 6.5	1,168	44	10	23.5	7.4	16.7	BSW
195/60R15	88H	540 A A	B510	6.0	5.5 - 7.0	1,235	44	10	24.2	7.9	18.8	BSW
175/65R15	84H	540 A A	B535	5.0	5.0 - 6.0	1,102	44	10	24.0	7.0	16.9	BSW
195/65R15	91H	540 A A	B506	6.0	5.5 - 7.0	1,356	44	10	25.0	7.9	19.2	BSW
205/65R15	94H	540 A A	B529	6.0	5.5 - 7.5	1,477	44	10	25.5	8.2	21.5	BSW
215/70R15	98H	540 A A	B507	6.5	5.5 - 7.0	1,653	44	10	26.9	8.7	23.9	BSW
205/55R16	91H	540 A A	B508	6.5	5.5 - 7.5	1,356	44	10	24.9	8.4	20.2	BSW
215/55R16	93H	540 A A	B530	7.0	6.0 - 7.5	1,433	44	10	25.3	8.9	22.8	BSW
205/60R16	92V	540 A A	B511	6.0	5.5 - 7.5	1,389	44	10	25.7	8.2	22.3	BSW
215/60R16	95H	540 A A	B509	6.5	6.0 - 7.5	1,521	44	10	26.1	8.7	23.8	BSW
215/60R16	95V	540 A A	B528	6.5	6.0 - 7.5	1,521	44	10	26.1	8.7	23.8	BSW
225/60R16	98H	540 A A	B512	6.5	6.0 - 8.0	1,653	44	10	26.6	9.0	24.6	BSW
235/60R16	100H	540 A A	B519	7.0	6.5 - 8.5	1,764	44	10	27.1	9.4	26.6	BSW
205/65R16	95H	540 A A	B595	6.0	5.5 - 7.5	1,521	44	10	26.5	8.2	22.9	BSW
215/65R16	98H	540 A A	B515	6.5	6.0 - 7.5	1,653	44	10	27.0	8.7	24.7	BSW
225/65R16	100T	540 A A	B534	6.5	6.0 - 8.0	1,764	44	10	27.5	9.0	25.7	BSW
235/65R16	103T	540 A A	B526	7.0	6.5 - 8.5	1,929	44	10	28.0	9.4	27.4	BSW
215/45R17	87V	540 A A	B754	7.0	7.0 - 8.0	1,201	44	10	24.7	8.4	20.8	BSW
225/45R17	91V	540 A A	B755	7.5	7.0 - 8.5	1,356	44	10	25.0	8.9	24.2	BSW
205/50R17	93V XL	540 A A	B596	6.5	5.5 - 7.5	1,433	50	10	25.1	8.4	22.5	BSW
215/50R17	95V XL	540 A A	B597	7.0	6.0 - 7.5	1,521	50	10	25.5	8.9	23.9	BSW
225/50R17	94V	540 A A	B598	7.0	6.0 - 8.0	1,477	44	10	25.9	9.2	24.8	BSW
235/50R17	96V	540 A A	B756	7.5	6.5 - 8.5	1,565	44	10	26.3	9.7	25.1	BSW
215/55R17	94V	540 A A	B514	7.0	6.0 - 7.5	1,477	44	10	26.3	8.9	24.6	BSW
225/55R17	97V	540 A A	B518	7.0	6.0 - 8.0	1,609	44	10	26.8	9.2	25.8	BSW
235/55R17	99H	540 A A	B523	7.5	6.5 - 8.5	1,709	44	10	27.2	9.6	27.3	BSW
215/60R17	96H	540 A A	B521	6.5	6.0 - 7.5	1,565	44	10	27.2	8.7	24.4	BSW
225/60R17	99H	540 A A	B520	6.5	6.0 - 8.0	1,709	44	10	27.6	9.0	26.4	BSW
235/60R17	102T	540 A A	B522	7.0	6.5 - 8.5	1,874	44	10	28.1	9.4	27.3	BSW
215/65R17	99T	540 A A	B525	6.5	6.0 - 7.5	1,709	44	10	28.0	8.7	25.7	BSW
225/65R17	102H	540 A A	B517	6.5	6.0 - 8.0	1,874	44	10	28.5	9.0	26.6	BSW
235/65R17	104H	540 A A	B516	7.0	6.5 - 8.5	1,984	44	10	29.1	9.4	28.4	BSW
225/45R18	95V XL	540 A A	B757	7.5	7.0 - 8.5	1,521	50	10	26.1	9.0	26.0	BSW
235/45R18	94V	540 A A	B665	8.0	7.5 - 9.0	1,477	44	10	26.3	9.3	26.6	BSW
245/45R18	96V	540 A A	B758	8.0	7.5 - 9.0	1,565	44	10	26.7	9.6	26.2	BSW
225/50R18	95T	540 A A	B599	7.0	6.0 - 8.0	1,521	44	10	26.9	9.2	25.3	BSW
235/50R18	97V	540 A A	B759	7.5	6.5 - 8.5	1,609	44	10	27.3	9.7	26.2	BSW
225/55R18	98V	540 A A	B666	7.0	6.0 - 8.0	1,653	44	10	27.8	9.2	27.1	BSW
235/55R18	100H	540 A A	B537	7.5	6.5 - 8.5	1,764	44	10	28.1	9.6	28.3	BSW
225/60R18	100H	540 A A	B524	6.5	6.0 - 8.0	1,764	44	10	28.6	9.0	27.3	BSW
235/60R18	103V	540 A A	B760	7.0	6.5 - 8.5	1,929	44	10	29.1	9.5	29.3	BSW
245/60R18	105H	540 A A	B761	7.0	7.0 - 8.5	2,039	44	10	29.6	9.8	31.3	BSW
235/65R18	106H	540 A A	B762	7.0	6.5 - 8.5	2,094	44	10	30.0	9.5	30.1	BSW
245/45R19	102V XL	540 A A	B763	8.0	7.5 - 9.0	1,874	50	10	27.7	9.6	27.8	BSW
255/50R19	107V XL	540 A A	B764	8.0	7.0 - 9.0	2,149	50	10	29.1	10.4	30.8	BSW
225/55R19	99V	540 A A	B765	7.0	6.0 - 8.0	1,709	44	10	28.8	9.2	28.2	BSW
235/55R19	101V	540 A A	B766	7.5	6.5 - 8.5	1,819	44	10	29.2	9.7	28.0	BSW
245/45R20	99V	540 A A	B767	8.0	7.5 - 9.0	1,709	44	10	28.7	9.6	27.2	BSW
245/50R20	102V	540 A A	B768	7.5	7.0 - 8.5	1,874	44	10	29.7	10.0	29.1	BSW
235/55R20	102V	540 A A	B769	7.5	6.5 - 8.5	1,874	44	10	30.1	9.5	29.7	BSW

LI Load Index SR Speed Rating XL Extra Load UTQG Uniform Tire Quality Grade BSW Black Side Wall

# ADVENTURO HT

HIGHWAY ALL-SEASON

**30**  
DAY

Test Drive

15 - 20 / 22 Inch 

Speed Rating: R / S / T / H / V 

45 - 85 Series 

UTQG: 600 A B UTQG

M+S Rated **M+S**

**65K**  
50k

Limited Warranty  
(60k for LT Sizes)



Handling



Comfort



Noise



Road Hazard  
Warranty

**24**HR

Roadside  
Assistance

Adventuro HT is designed with comfort and control in mind. The advanced tread design and robust 60,000 mile tread life warranty offer drivers the optimal balance of form and function. With features like full depth sipes, chamfered tread edges and a continuous center rib, you can drive with confidence and control. Dual sidewall designs also give you the ability to choose the perfect look for your vehicle.

## FEATURES / BENEFITS

### Full Depth Wave Sipes

Additional biting edges for improved wet and snow traction

### Chamfered Tread Edges

Increased displacement of water to reduce the risk of hydroplaning

### Dual Sidewall Design

Two choices for the perfect look

### Continuous Center Rib

Improved braking performance and excellent stability at highway speeds

### Harmonically Optimized Pitch Sequencing

Reduced road noise generation for a quieter ride



Tire Size	LI / SR	UTQG	Item Number	Measuring Rim inch	Rim Width Range inch	Max. Load lbs	Max. Pressure psi	Tread Depth 32nd	Overall Diameter inch	Section Width inch	Weight lbs	Side Wall
P235/75R15	105T	600 A B	100UA3630	6.5	6.0 - 8.0	2,028	44	11	29.0	9.5	27.5	BSW
P215/70R16	99T	600 A B	100UA3606	6.5	5.5 - 7.0	1,709	44	11	28.0	8.8	23.9	BSW
P235/70R16	104T	600 A B	100UA3622	7.0	6.0 - 8.0	1,984	44	11	29.1	9.5	27.9	BSW
P245/70R16	106T	600 A B	100UA3628	7.0	6.5 - 8.0	2,094	44	11	29.6	9.9	29.4	BSW
P255/70R16	109T	600 A B	100UA3627	7.5	6.5 - 8.5	2,271	44	11	30.2	10.2	30.4	BSW
P265/70R16	111T	600 A B	100UA3624	8.0	7.0 - 9.0	2,403	44	11	30.7	10.7	32.5	BSW
P245/75R16	109T	600 A B	100UA3626	7.0	6.5 - 8.0	2,271	44	11	30.6	9.9	31.2	BSW
P265/75R16	114T	600 A B	100UA3632	7.5	7.0 - 9.0	2,601	44	11	31.7	10.6	33.2	BSW
P245/65R17	105T	600 A B	100UA3623	7.0	7.0 - 8.5	2,039	44	11	29.7	9.7	28.7	BSW
P265/65R17	110T	600 A B	AS124	8.0	7.5 - 9.5	2,337	44	11	30.6	10.7	34.9	OWL
P245/70R17	108T	600 A B	100UA3625	7.0	6.5 - 8.0	2,205	44	11	30.7	9.8	31.1	BSW
255/70R17	112T											
P265/70R17	113T	600 A B	100UA3621	8.0	7.0 - 9.0	2,535	44	11	31.7	10.8	34.2	BSW
255/55R18	109V XL	600 A B	AS125	8.0	7.0 - 9.0	2,271	50	11	29.0	10.4	34.0	BSW
P265/60R18	109T	600 A B	AS126	8.0	7.5 - 9.5	2,271	44	11	30.5	10.7	35.0	BSW
255/65R18	111T	600 A B	100UA3647	7.5	7.0 - 9.0	2403	44	11	31.1	10.0	32.6	BSW
P265/65R18	112T	600 A B	AS127	8.0	7.5 - 9.5	2,469	44	11	31.5	10.7	35.8	OWL
P275/65R18	114T	600 A B	AS128	8.0	7.5 - 9.5	2,601	44	11	32.1	11.0	38.0	BSW
P255/70R18	112T	600 A B	AS129	7.5	6.5 - 8.5	2,469	44	11	32.1	10.2	35.0	BSW
P265/70R18	114T	600 A B	AS130	8.0	7.0 - 9.0	2,601	44	11	32.6	10.7	38.2	OWL
P245/55R19	103T	600 A B	AS131	7.5	7.0 - 8.5	1,929	44	11	29.7	10.0	33.0	BSW
P255/60R19	108H	600 A B	AS132	7.5	7.0 - 9.0	2,205	44	11	31.1	10.2	34.6	BSW
255/50R20	105H	600 A B	AS133	8.0	7.0 - 9.0	2,039	44	11	30.1	10.4	34.4	BSW
265/50R20	107T	600 A B	AS134	8.5	7.5 - 9.5	2,150	44	11	30.5	10.9	36.4	BSW
P255/55R20	107H	600 A B	AS135	8.0	7.0 - 9.0	2,149	44	11	31.0	10.4	36.6	BSW
P275/55R20	111H	600 A B	100UA3601	8.5	7.5 - 9.5	2,403	44	11	31.9	11.2	36.5	BSW
P275/60R20	114H	600 A B	AS136	8.0	7.5 - 9.5	2,601	44	11	33.0	11.0	39.2	BSW
285/45R22	114H											
275/50R22	111H											

Tire Size	LI / SR (s/d)	LR / PR	Item Number	Measuring Rim inch	Rim Width Range inch	Max. Load (s/d) lbs	Max. Pressure psi	Tread Depth 32nd	Overall Diameter inch	Section Width inch	Weight lbs	Side Wall
LT225/75R16	115/112S	E / 10	AS137	6.0	6.0 - 7.0	2,680/2,470	80	13	29.3	8.8	37.3	BSW
LT245/75R16	120/116S	E / 10	AS138	7.0	6.5 - 8.0	3,042/2,778	80	13	30.5	9.8	41.8	BSW
LT265/75R16	123/120S	E / 10	AS139	7.5	7.0 - 8.0	3,415/3,085	80	13	31.7	10.5	47.5	OWL
LT235/85R16	120/116S	E / 10	AS140	6.5	6.0 - 7.5	3,042/2,778	80	13	31.7	9.3	42.9	BSW
LT265/70R17	121/118S	E / 10	AS141	8.0	7.0 - 8.5	3,195/2,910	80	13	31.7	10.7	47.6	OWL
LT245/75R17	121/118S	E / 10	AS142	7.0	6.5 - 7.5	3,195/2,910	80	13	31.5	9.8	44.4	BSW
LT235/80R17	120/117R	E / 10	AS143	6.5	6.0 - 7.5	3,085/2,835	80	13	31.8	9.3	42.8	BSW

LI Load Index SR Speed Rating XL Extra Load UTQG Uniform Tire Quality Grade (s/d) Single/Dual LR Load Range PR Ply Rating BSW Black Side Wall OWL Outline White Letter

COMING SOON

# SAVERO HT2

HIGHWAY ALL-SEASON

30 DAY

Test Drive

15 - 20 Inch 

Speed Rating: R / S / T / H / V 

45 - 85 Series 

UTQG: 520 A B UTQG

M+S Rated **M+S**

50k

Limited  
Warranty



Comfort



Noise

Savero HT2 is an all season highway light truck and SUV tire. Active drivers will benefit from the superior pattern design that brings unparalleled handling and control in wet and dry conditions.

## FEATURES / BENEFITS

### Advanced Tread Design

Excellent handling and ride comfort

### Carcass Tension Technology

Ensures balance of dry and wet handling

### Noise Canceling Tread

Advanced tread block design effectively reduces road noise

### All-Season Compound

Outstanding grip and stability





Tire Size	LI / SR	UTQG	Item Number	Measuring Rim inch	Rim Width Range inch	Max. Load lbs	Max. Pressure psi	Tread Depth 32nd	Overall Diameter inch	Section Width inch	Weight lbs	Side Wall
P215/70R15	97S	520 A B	B452	6.5	5.5 - 7.0	1,620	44	10	26.9	8.7	24.4	BSW
P235/75R15	105T	520 A B	B443	6.5	6.0 - 8.0	2,028	44	10	28.9	9.3	29.0	OWL
P255/65R16	106S	520 A B	B459	7.5	7.0 - 9.0	2,094	44	10	29.1	10.2	31.8	BSW
P215/70R16	99T	520 A B	B448	6.5	5.5 - 7.0	1,709	44	10	27.9	8.7	25.4	BSW
P225/70R16	101T	520 A B	B462	6.5	6.0 - 7.5	1,819	44	10	28.4	9.0	28.0	OWL
P235/70R16	104T	520 A B	B447	7.0	6.0 - 8.0	1,984	44	10	29.0	9.4	29.4	OWL
P245/70R16	106T	520 A B	B445	7.0	6.5 - 8.0	2,094	44	10	29.5	9.8	31.3	OWL
P255/70R16	109T	520 A B	B433	7.5	6.5 - 8.5	2,271	44	10	30.1	10.2	32.8	OWL
P235/70R16	111T	520 A B	B444	8.0	7.0 - 9.0	2,403	44	10	30.6	10.7	34.9	OWL
P225/75R16	106S XL	520 A B	B549	6.0	6.0 - 7.5	2,094	50	10	29.3	8.8	29.7	OWL
P235/75R16	106T	520 A B	B451	6.5	6.5 - 8.0	2,094	44	10	29.8	9.3	31.6	BSW
P245/75R16	109T	520 A B	B461	7.0	6.5 - 8.0	2,271	44	10	30.5	9.8	33.4	OWL
P265/75R16	114T	520 A B	B436	7.5	7.0 - 9.0	2,601	44	10	31.7	10.5	36.4	OWL
P275/60R17	110T	520 A B	B437	8.0	7.5 - 9.5	2,337	44	10	30.0	11.0	34.8	OWL
225/65R17	102H	520 A B	B538	6.5	6.0 - 8.0	1,874	44	10	28.5	9.0	27.7	BSW
P235/65R17	103T	520 A B	B460	7.0	6.5 - 8.5	1,929	44	10	29.1	9.4	28.7	BSW
P245/65R17	105T	520 A B	B455	7.0	7.0 - 8.5	2,039	44	10	29.5	9.8	30.5	BSW
P255/65R17	108S	520 A B	B454	7.5	7.0 - 9.0	2,205	44	10	30.1	10.2	32.0	BSW
P265/65R17	110T	520 A B	B440	8.0	7.5 - 9.5	2,337	44	10	30.6	10.7	34.9	OWL
P235/70R17	108S XL	520 A B	B438	7.0	6.0 - 8.0	2,205	50	10	30.0	9.4	31.5	OWL
P245/70R17	108T	520 A B	B449	7.0	6.5 - 8.0	2,205	44	10	30.6	9.8	32.6	OWL
P265/70R17	113T	520 A B	B430	8.0	7.0 - 9.0	2,535	44	10	31.7	10.7	35.6	OWL
255/55R18	109V XL	520 A B	B543	8.0	7.0 - 9.0	2,271	50	10	29.0	10.4	34.7	BSW
235/60R18	107V XL	520 A B	B540	7.0	6.5 - 8.5	2,149	50	10	29.1	9.4	30.7	BSW
P245/60R18	104T	520 A B	B442	7.0	7.0 - 8.5	1,984	44	10	29.6	9.8	31.4	BSW
P265/60R18	109T	520 A B	B463	8.0	7.5 - 9.5	2,271	44	10	30.5	10.7	35.1	OWL
P235/65R18	104T	520 A B	B435	7.0	6.5 - 8.5	1,984	44	10	30.0	9.4	31.9	OWL
255/65R18	111T	520 A B	B750	7.5	7.0 - 9.0	2,271	44	10	31.1	10.2	33.8	BSW
P265/65R18	112S	520 A B	B548	8.0	7.5 - 9.5	2,469	44	10	31.5	10.7	36.0	OWL
P275/65R18	114T	520 A B	B541	8.0	7.5 - 9.5	2,601	44	10	32.1	11.0	38.1	BSW
P255/70R18	112T	520 A B	B441	7.5	6.5 - 8.5	2,469	44	10	32.1	10.2	35.0	BSW
P265/70R18	114S	520 A B	B545	8.0	7.0 - 9.0	2,601	44	10	32.6	10.7	38.2	OWL
P245/55R19	103S	520 A B	B542	7.5	7.0 - 8.5	1,929	44	10	29.6	10.0	33.0	BSW
P255/60R19	108H	520 A B	B751	7.5	7.0 - 9.0	2,205	44	10	31.1	10.2	33.8	BSW
275/45R20	110V XL	520 A B	B550	9.0	8.5 - 10.5	2,337	50	10	29.8	10.7	35.4	BSW
255/50R20	105H	520 A B	B621	8.0	7.0 - 9.0	2,039	44	10	30.1	10.4	35.0	BSW
265/50R20	107V	520 A B	B752	8.5	8.0 - 9.0	2,150	44	11	30.5	10.9	36.4	BSW
P255/55R20	107H	520 A B	B753	8	7.0 - 9.0	2,419	44	10	31.0	10.4	36.6	BSW
P275/55R20	111H	520 A B	B539	8.5	7.5 - 9.5	2,403	44	10	31.9	11.2	39.3	BSW
P275/60R20	114S	520 A B	B432	8.0	7.5 - 9.5	2,601	44	10	33.0	11.0	39.0	OWL

Tire Size	LI / SR (s/d)	LR / PR	Item Number	Measuring Rim inch	Rim Width Range inch	Max. Load (s/d) lbs	Max. Pressure psi	Tread Depth 32nd	Overall Diameter inch	Section Width inch	Weight lbs	Side Wall
30X9.50R15LT	104R	C / 6	B458	7.5	6.5 - 8.5	1,985	50	13	29.5	9.4	35.9	OWL
31X10.50R15LT	109R	C / 6	B446	8.5	7.0 - 9.0	2,270	50	13	30.5	10.6	40.8	OWL
LT235/75R15	104/101R	C / 6	B453	6.5	6.0 - 7.0	1,985/1,820	50	13	28.9	9.3	35.7	OWL
LT225/75R16	115/112R	E / 10	B457	6.0	6.0 - 7.0	2,680/2,470	80	13	29.3	8.8	37.4	BSW
LT245/75R16	120/116S	E / 10	B456	7.0	6.5 - 8.0	3,042/2,778	80	13	30.5	9.8	42.7	OWL
LT265/75R16	123/120R	E / 10	B434	7.5	7.0 - 8.0	3,415/3,085	80	13	31.7	10.5	47.5	OWL
LT215/85R16	115/112R	E / 10	B544	6.0	5.5 - 7.0	2,680/2,470	80	13	30.4	8.5	38.5	BSW
LT235/85R16	120/116R	E / 10	B450	6.5	6.0 - 7.5	3,042/2,778	80	13	31.7	9.3	42.9	BSW
LT245/70R17	119/116R	E / 10	B439	7.0	6.5 - 8.0	3,000/2,755	80	13	30.6	9.8	41.4	BSW
LT265/70R17	121/118R	E / 10	B431	8.0	7.0 - 8.5	3,195/2,910	80	13	31.7	10.7	46.9	OWL
LT245/75R17	121/118S	E / 10	B547	7.0	6.5 - 7.5	3,195/2,910	80	13	31.5	9.8	44.4	BSW
LT235/80R17	120/117R	E / 10	B546	6.5	6.0 - 7.5	3,085/2,835	80	13	31.8	9.3	42.8	BSW

LI Load Index SR Speed Rating XL Extra Load UTQG Uniform Tire Quality Grade (s/d) Single/Dual LR Load Range PR Ply Rating BSW Black Side Wall OWL Outline White Letter

# ADVENTURO ATX

ON / OFF ROAD ALL-TERRAIN

30 DAY

Test Drive

15 - 18 / 20 Inch



Speed Rating: R / S / T / H



55 - 80 Series



UTQG: 520 A B



M+S Rated



50k

Limited  
Warranty



3PMS



Handling



Comfort



On / Off Road



Road Hazard  
Warranty

24HR

Roadside  
Assistance

The Adventuro ATX offers excellent balance between on and off road performance. With a Three-Peak Mountain Snowflake (3PMS) rating, the ATX is your solution for improved traction in winter conditions. The sidewall cleats and stair step grooves are designed to deliver premium off-road performance, while a cut and chip resistant compound ensures the integrity of the tread is not compromised. The Adventuro ATX—aggressively refined.

## FEATURES / BENEFITS

### Sidewall Cleats

Additional grip in deep soil and on loose surfaces

### Interlocked Center Rib

Dependable on-road handling and stability

### Wide Shoulder Channels

Improved performance on wet roads

### Stair Step Grooves

Enhanced off-road traction

### Three-Peak Mountain Snowflake (3PMS) Rating

Improved snow traction over a standard all-season rated tire



ON / OFF ROAD ALL-TERRAIN **ADVENTURO ATX**

Tire Size	LI / SR	UTQG	Item Number	Measuring Rim inch	Rim Width Range inch	Max. Load lbs	Max. Pressure psi	Tread Depth 32nd	Overall Diameter inch	Section Width inch	Weight lbs	Side Wall
P235/75R15	108S XL	520 A B	100UA3700	6.5	6.0 - 8.0	2,183	50	13	29.1	9.5	30.2	BSW
P235/70R16	104T	520 A B	100UA3723	7.0	6.0 - 8.0	1,984	44	13	29.2	9.6	29.9	BSW
P245/70R16	106T	520 A B	100UA3724	7.0	6.5 - 8.0	2,094	44	13	29.8	9.8	31.8	BSW
P255/70R16	109T	520 A B	100UA3725	7.5	6.5 - 8.5	2,271	44	13	30.3	10.2	34.9	BSW
P265/70R16	111T	520 A B	100UA3702	8.0	7.0 - 9.0	2,403	44	13	30.9	10.7	36.4	BSW
P245/75R16	109T	520 A B	100UA3701	7.0	6.0 - 8.0	2,271	44	13	30.8	10.0	34.1	BSW
P265/75R16	114T	520 A B	100UA3726	7.5	7.0 - 9.0	2,601	44	13	31.9	10.6	37.1	BSW
P245/65R17	105T	520 A B	100UA3704	7.0	7.0 - 8.5	2,039	44	13	29.8	9.6	31.2	BSW
P265/70R17	113T	520 A B	100UA3706	8.0	7.0 - 9.0	2,535	44	13	31.9	10.8	38.3	BSW
265/60R18	110H	520 A B	100UA3707	8.0	7.5 - 9.5	2,337	44	13	30.7	10.7	36.1	BSW
265/65R18	114T	520 A B	100UA3708	8.0	7.5 - 9.5	2,601	44	13	31.8	10.6	38.4	BSW
275/65R18	116T	520 A B	AS151	8.0	7.5 - 9.5	2,756	44	13	32.1	11.0	39.2	BSW
P275/55R20	111H	520 A B	100UA3711	8.5	7.5 - 9.5	2,403	44	13	32.2	11.2	40.0	BSW
P275/60R20	114H	520 A B	100UA3727	8.0	7.5 - 9.5	1,180	44	13	33.0	11.0	40.9	BSW

Tire Size	LI / SR (s/d)	LR / PR	Item Number	Measuring Rim inch	Rim Width Range inch	Max. Load (s/d) lbs	Max. Pressure psi	Tread Depth 32nd	Overall Diameter inch	Section Width inch	Weight lbs	Side Wall
31x10.50R15	109S	C / 6	AS154	8.5	7.0 - 9.0	2,270	50	16	30.5	10.6	40.9	OWL
LT245/75R16	120/116S	E / 10	AS153	7.0	6.5 - 8.0	3,042/2,778	80	16	30.5	9.8	42.7	OWL
LT265/75R16	123/120S	E / 10	AS152	7.5	7.0 - 8.0	3,415/3,085	80	16	31.7	10.5	48.5	OWL
LT285/75R16	126/123R	E / 10	AS155	8.0	7.5 - 9.0	3,750/3,415	80	16	32.8	11.3	51.4	OWL
LT265/70R17	121/118S	E / 10	AS150	8.0	7.0 - 8.5	3,195/2,910	80	16	31.7	10.7	48.1	OWL
LT285/70R17	121/118S	E / 10	AS158	8.5	7.5 - 9.0	3,195/2,910	80	16	32.8	11.5	52.8	OWL
LT245/75R17	121/118S	E / 10	AS156	7.0	6.5 - 7.5	3,195/2,910	80	16	31.5	9.8	46.1	OWL
LT235/80R17	120/117S	E / 10	AS157	6.5	6.0 - 7.5	3,085/2,835	80	16	31.8	9.3	44.0	OWL
LT275/65R18	123/120S	E / 10	AS159	8.0	7.5 - 9.0	3,415/3,085	80	16	32.1	11.0	49.9	OWL
LT265/70R18	124/121S	E / 10	AS160	8.0	7.0 - 9.0	3,525/3,195	80	16	32.6	10.5	52.3	OWL
LT275/70R18	125/122S	E / 10	AS161	8.0	7.0 - 8.5	3,640/3,305	80	16	33.2	11.0	52.0	OWL
LT275/65R20	126/123S	E / 10	AS162	8.0	7.5 - 9.5	3,750/3,415	80	16	34.1	10.5	59.5	OWL
35x12.50R20LT	121R	E / 10	AS163	10.0	8.5 - 11.0	3,195	65	16	34.5	12.5	64.8	OWL

**LI** Load Index **SR** Speed Rating **XL** Extra Load **UTQG** Uniform Tire Quality Grade **(s/d)** Single/Dual **LR** Load Range **PR** Ply Rating **BSW** Black Side Wall **OWL** Outline White Letter

# ADVENTURO AT<sup>3</sup>

ON / OFF ROAD ALL-TERRAIN

**30**<sub>DAY</sub>

Test Drive

15 - 18 / 20 Inch 

Speed Rating: R / S / T / H 

55 - 85 Series 

UTQG: 520 A B 

M+S Rated 

**50k**

Limited Warranty  
(P-Metric Only)



Handling



Comfort



On / Off Road

Adventuro AT<sup>3</sup> is an all-terrain tire for pickup and SUV drivers wanting aggressive looks and civilized on-road manners. The enhanced tread compound and dual-purpose tread design provides excellent handling, wet grip and a comfortable ride and is backed by a 50,000 mile tread life warranty. Superb off-road capabilities are maintained with features that provide stability and grip on soft and loose surfaces as well as a self-cleaning tread design.

## FEATURES / BENEFITS

### Dual-Purpose Tread Design

Balanced on-road and off-road performance

### Interlocked Center Rib

Superior handling, stability and grip on both soft and loose surfaces

### Five-Pitch Technology

Reduced tire noise

### 3D Chamfered-Edge Grooves

Self-cleaning tread design for off-road performance

### Enhanced Compound

Provides wet and dry grip, longer tread life and improved cut/chip resistance





Tire Size	LI / SR	UTQG	Item Number	Measuring Rim inch	Rim Width Range inch	Max. Load lbs	Max. Pressure psi	Tread Depth 32nd	Overall Diameter inch	Section Width inch	Weight lbs	Side Wall
P235/75R15	105S	520 A B	AS087	6.5	6.0 - 8.0	2,028	44	13	28.9	9.3	30.2	OWL
P235/70R16	104T	520 A B	AS081	7.0	6.0 - 8.0	1,984	44	13	29.0	9.5	30.9	OWL
P265/70R16	111T	520 A B	AS079	8.0	7.0 - 9.0	2,403	44	13	30.6	10.7	34.8	OWL
P245/75R16	109T	520 A B	AS083	7.0	6.0 - 8.0	2,271	44	13	30.5	9.8	33.9	OWL
P245/65R17	105T	520 A B	AS082	7.0	7.0 - 8.5	2,039	44	13	29.5	9.8	31.8	OWL
P265/65R17	110T	520 A B	AS085	8.0	7.5 - 9.5	2,337	44	13	30.6	10.7	34.4	OWL
P245/70R17	108T	520 A B	AS084	7.0	6.5 - 8.0	2,205	44	13	30.6	9.8	33.7	OWL
P265/70R17	113T	520 A B	AS077	8.0	7.0 - 9.0	2,535	44	13	31.7	10.7	36.9	OWL
P285/70R17	117T	520 A B	AS091	8.5	7.5 - 9.5	2,833	44	13	32.8	11.5	42.4	OWL
P235/75R17	108S	520 A B	AS089	6.5	6.0 - 8.0	2,205	44	13	30.9	9.3	33.2	OWL
P265/60R18	109T	520 A B	AS088	8.0	7.5 - 9.5	2,271	44	13	30.5	10.7	35.8	OWL
P265/65R18	112S	520 A B	AS086	8.0	7.5 - 9.5	2,469	44	13	31.5	10.7	36.3	OWL
P275/65R18	114T	520 A B	AS078	8.0	7.5 - 9.5	2,601	44	13	32.1	11.0	39.2	OWL
P265/70R18	114S	520 A B	AS090	8.0	7.0 - 9.0	2,601	44	13	32.6	10.7	38.3	OWL
P275/55R20	111H	520 A B	AS080	8.5	7.5 - 9.5	2,403	44	13	31.9	11.2	39.8	BSW

Tire Size	LI / SR (s/d)	LR / PR	Item Number	Measuring Rim inch	Rim Width Range inch	Max. Load (s/d) lbs	Max. Pressure psi	Tread Depth 32nd	Overall Diameter inch	Section Width inch	Weight lbs	Side Wall
31X10.50R15LT	109S	C / 6	AS093	8.5	7.0 - 9.0	2,270	50	16	30.5	10.6	40.9	OWL
LT245/75R16	120/116S	E / 10	AS101	7.0	6.5 - 8.0	3,042/2,778	80	16	30.5	9.8	42.7	OWL
LT265/75R16	123/120S	E / 10	AS092	7.5	7.0 - 8.0	3,415/3,085	80	16	31.7	10.5	48.5	OWL
LT285/75R16	126/123R	E / 10	AS094	8.0	7.5 - 9.0	3,750/3,415	80	16	32.8	11.3	51.4	OWL
LT215/85R16	115/112S	E / 10	AS104	6.0	5.5 - 7.0	2,680/2,470	80	16	30.4	8.5	39.8	OWL
LT235/85R16	120/116S	E / 10	AS099	6.5	6.0 - 7.5	3,042/2,778	80	16	31.7	9.3	44.9	BSW
LT245/70R17	119/116S	E / 10	AS103	7.0	6.5 - 8.0	3,000/2,755	80	16	30.6	9.8	44.0	OWL
LT265/70R17	121/118S	E / 10	AS102	8.0	7.0 - 8.5	3,195/2,910	80	16	31.7	10.7	48.1	OWL
LT285/70R17	121/118S	E / 10	AS095	8.5	7.5 - 9.0	3,195/2,910	80	16	32.8	11.5	52.8	OWL
LT245/75R17	121/118S	E / 10	AS097	7.0	6.5 - 7.5	3,195/2,910	80	16	31.5	9.8	46.1	OWL
LT235/80R17	120/117S	E / 10	AS100	6.5	6.0 - 7.5	3,085/2,835	80	16	31.8	9.3	44.0	OWL
LT275/65R18	123/120S	E / 10	AS098	8.0	7.5 - 9.0	3,415/3,085	80	16	32.1	11.0	49.9	OWL
LT285/65R18	125/122S	E / 10	AS105	8.5	8.0 - 10.0	3,640/3,305	80	16	32.6	11.5	51.4	OWL
LT275/70R18	125/122S	E / 10	AS096	8.0	7.0 - 8.5	3,640/3,305	80	16	33.2	11.0	52.0	OWL

**LI** Load Index **SR** Speed Rating **XL** Extra Load **UTQG** Uniform Tire Quality Grade **(s/d)** Single/Dual **LR** Load Range **PR** Ply Rating **BSW** Black Side Wall **OWL** Outline White Letter

# MAXMILER Pro

COMMERCIAL VAN ALL-SEASON

15 - 17 Inch 

Speed Rating: Q / R / T / H 

55 - 65 / 75 - 85 Series 

UTQG: 700 A A UTQG

M+S Rated **M+S**



Noise



Durability



Stability

Maxmiler Pro is designed for today's light commercial vehicles like Ford Transit, Nissan NV and RAM ProMaster. The durable reinforced sidewall is built to carry the heavy loads of compact and full-size multi-purpose vans. The tread pattern delivers all-season performance for highway use with the toughness needed for some off-road driving near the jobsite. Maxmiler Pro—your partner in business to get the job done.

## FEATURES / BENEFITS

### Square Footprint

Even pressure distribution which resists irregular wear and improves tire mileage

### Large Siped Shoulder Blocks

Improved stability, braking and wet/dry grip

### Wide Tread Grooves

Enhanced water evacuation for excellent hydroplaning resistance

### Reinforced Sidewall

Heavy load carrying capacity for commercial multi-purpose vans

### Low Rolling Resistance

Reduced fuel consumption



COMMERCIAL VAN ALL-SEASON **MAXMILER Pro**

Tire Size	LI / SR	UTQG	Item Number	Measuring Rim inch	Rim Width Range inch	Max. Load lbs	Max. Pressure psi	Tread Depth 32nd	Overall Diameter inch	Section Width inch	Weight lbs	Side Wall
P205/65R15	95T XL	700 A A	B624	6.0	5.5 - 7.5	1,521	50	11	25.5	8.2	24.0	BSW
215/55R16	97H XL	700 A A	B625	7.0	6.0 - 7.5	1,609	50	11	25.3	8.9	24.3	BSW

Tire Size	LI / SR (s/d)	LR / PR	Item Number	Measuring Rim inch	Rim Width Range inch	Max. Load (s/d) lbs	Max. Pressure psi	Tread Depth 32nd	Overall Diameter inch	Section Width inch	Weight lbs	Side Wall
185/60R15C	94/92T	-	B623	5.5	5.5 - 6.0	1,475/1,390	55	12	23.7	7.4	21.4	BSW
235/65R16C	121/119R	-	B626	7.0	6.5 - 7.5	3,195/3,000	85	13	28.0	9.4	38.1	BSW
225/75R16C	121/120R	-	B627	6.0	6.0 - 7.0	3,195/3,085	85	13	29.3	8.8	38.1	BSW
LT245/75R16	120/116Q E	E / 10	B631	7.0	6.5 - 8.0	3,042/2,778	80	14	30.5	9.8	44.3	BSW
LT215/85R16	115/112Q E	E / 10	B628	6.0	5.5 - 7.0	2,680/2,470	80	13	30.4	8.7	39.9	BSW
LT235/85R16	120/116R E	E / 10	B630	6.5	6.0 - 7.5	3,042/2,778	80	13	31.7	9.3	45.0	BSW
LT245/75R17	121/118R E	E / 10	B632	7.0	6.5 - 7.5	3,195/2,910	80	14	31.5	9.8	46.3	BSW
LT235/80R17	120/117R E	E / 10	B629	6.5	6.0 - 7.5	3,085/2,835	80	13	31.8	9.3	44.8	BSW

**LI** Load Index **SR** Speed Rating **XL** Extra Load **UTQG** Uniform Tire Quality Grade **(s/d)** Single/Dual **LR** Load Range **PR** Ply Rating **BSW** Black Side Wall

# MAXMILER ST

TRAILER SERVICE

13 - 16 Inch 

Speed Rating: M 

75 - 85 Series 

M+S Rated 



Durability



Stability

Maxmiler ST is specifically made for trailer applications. It features sturdy sidewall construction to help reduce trailer sway and enhance load carrying capacity for stable and reliable towing. The robust full width tread design increases contact with the road for better braking performance. Dual steel belts in the tread also enhance handling, stability and puncture resistance.

## FEATURES / BENEFITS

### Full Width Tread

Improved road contact, strong grip and better braking performance

### High Modulus Steel Belts

Enhanced handling, stability and puncture resistance

### Robust Shoulder Blocks

Increased traction and stability

### High-Tech Polyester Casing

Greater durability and reduced trailer sway

### Jointless Nylon Edge Plies

Increased strength and treadwear






Tire Size	LI / SR (s/d)	LR / PR	Item Number	Measuring Rim inch	Rim Width Range inch	Max. Load (s/d) lbs	Max. Pressure psi	Tread Depth 32nd	Overall Diameter inch	Section Width inch	Weight lbs	Side Wall
ST175/80R13	91/87M	C / 6	100A2778	5.0	4.5 - 5.5	1,360/1,200	50	10	24.0	7.0	16.6	BSW
ST205/75R14	100/96M	C / 6	100A2779	5.5	5.0 - 6.0	1,760/1,570	50	10	26.1	8.0	22.5	BSW
ST215/75R14	102/98M	C / 6	100A2781	6.0	5.5 - 7.0	1,870/1,650	50	11	26.7	8.5	24.3	BSW
ST205/75R15	107/102M	D / 8	100A2780	5.5	5.0 - 6.5	2,150/1,870	65	10	27.1	8.0	24.8	BSW
ST225/75R15	117/112M	E / 10	100A2782	6.0	6.0 - 7.0	2,830/2,470	80	11	28.3	8.8	31.4	BSW
ST235/80R16	123/119M	E / 10	100A2783	6.5	6.0 - 7.5	3,420/3,000	80	16	30.8	9.3	40.6	BSW
ST235/85R16	125/121M	E / 10	100A2784	6.5	6.0 - 7.0	3,640/3,200	80	16	31.7	9.3	42.7	BSW

**LI** Load Index **SR** Speed Rating **(s/d)** Single/Dual **LR** Load Range **PR** Ply Rating **BSW** Black Side Wall



## EXPERIENCE TREAD ACADEMY!

TreadAcademy.com is a resource for tire professionals to learn about and get certified on GT Radial's product offering.

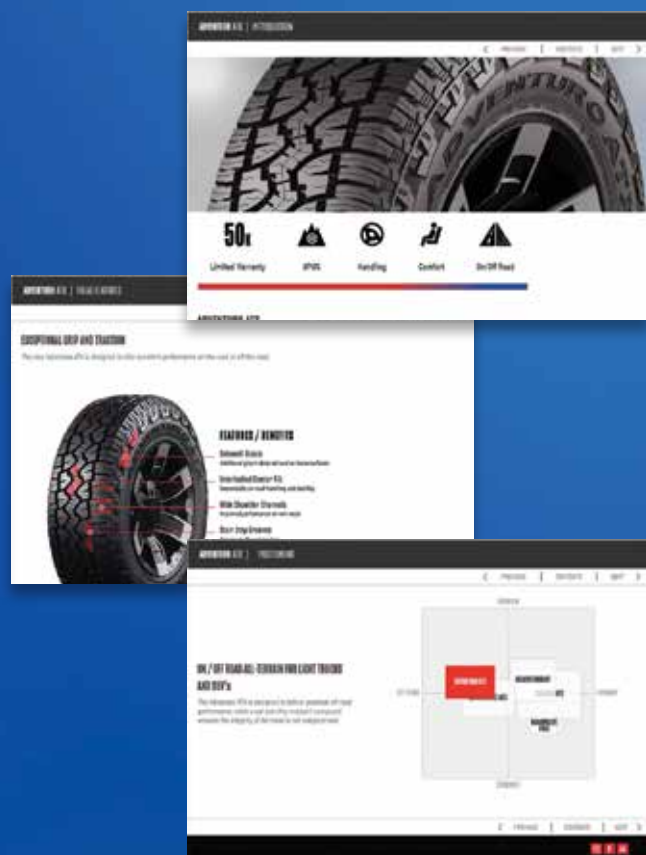

## GT RADIAL CERTIFIED PROFESSIONAL

Designed for tire dealers and technicians, our GT Radial Certified Professional program is a quick and straight forward way to learn the specifics about our products and take your certification test right here. Certification will help prepare your team with tools to sell and support GT Radial products with confidence.

## PASSENGER AND LIGHT TRUCK CERTIFICATION


Passenger and Light Truck tire certification starts with an introductory module that covers the basics, and includes product modules for just about every product we sell.

## DEALER TOOLS AND MORE

Product guides and catalogs are just a click away... including tech bulletins for passenger and light truck tires.

**TREADACADEMY.COM**

# Designations, Load Index & Speed Rating

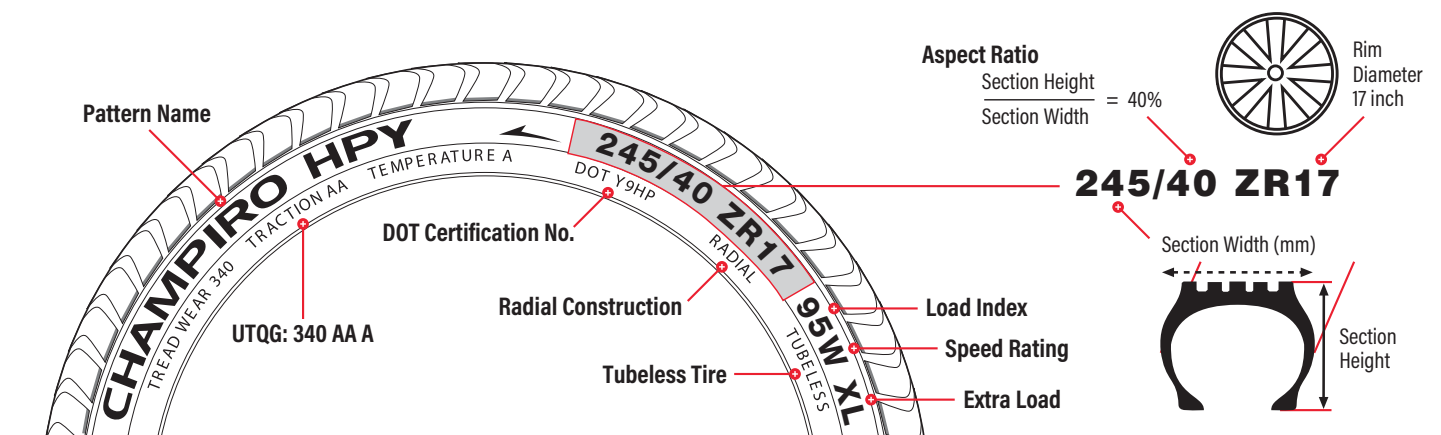

Before fitting, it is essential to check the different markings to ensure that the tire meets the maximum load and speed possibilities and/or the regulations in force.

## SAFETY WARNING

1. Never inflate beyond 40PSI (275kPa) to seat beads.
2. Tires should always be installed by qualified technicians following USTMA (formerly RMA) installation procedures.
3. Never mount tires on rims which are damaged or not smooth and clean.
4. Never mount a tire with a torn bead.
5. Never inflate a tire that is lying on the floor or other flat surface.
6. Always use a tire mounting machine with hold-down device or safety cage, or bolt to vehicle axle.

**MOUNT ONLY ON A RIM OF EXACT SAME DIAMETER AS THE TIRE.**

## Speed Rating System

SR	MPH	KM/H
B	31	50
C	37	60
D	40	65
E	43	70
F	50	80
G	56	90
J	62	100
K	68	110
L	75	120
M	81	130
N	87	140
P	93	150
Q	100	160
R	106	170
S	113	180
T	118	190
U	124	200
H	130	210
V	149	240
W	168	270
Y	186	300
(Y)	Above 186	Above 300

## Load Capacity Index

LI	LBS	KG	LI	LBS	KG
67	677	307	101	1,819	825
68	694	315	102	1,874	850
69	716	325	103	1,929	875
70	739	335	104	1,984	900
71	761	345	105	2,039	925
72	783	355	106	2,094	950
73	805	365	107	2,150	975
74	827	375	108	2,205	1,000
75	852	387	109	2,271	1,030
76	882	400	110	2,337	1,060
77	908	412	111	2,403	1,090
78	937	425	112	2,469	1,120
79	964	437	113	2,535	1,150
80	992	450	114	2,601	1,180
81	1,018	462	115	2,679	1,215
82	1,047	475	116	2,756	1,250
83	1,073	487	117	2,833	1,285
84	1,102	500	118	2,910	1,320
85	1,135	515	119	2,998	1,360
86	1,168	530	120	3,086	1,400
87	1,201	545	121	3,197	1,450
88	1,235	560	122	3,307	1,500
89	1,279	580	123	3,417	1,550
90	1,323	600	124	3,527	1,600
91	1,356	615	125	3,658	1,650
92	1,389	630	126	3,748	1,700
93	1,433	650	127	3,858	1,750
94	1,477	670	128	3,968	1,800
95	1,521	690	129	4,079	1,850
96	1,565	710	130	4,189	1,900
97	1,609	730	131	4,299	1,950
98	1,653	750	132	4,409	2,000
99	1,764	775	133	4,542	2,060
100	1,819	800	134	4,674	2,120

## Load Capacity Index

Load Range	Ply Rating	Load Range	Ply Rating
A	2	G	14
B	4	H	16
C	6	J	18
D	8	L	20
E	10	M	22
F	12	N	24

# Warranties



## 5 Year Limited Warranty

This Standard Limited Warranty Policy and Procedures (“**Standard Limited Warranty**”) applies to all new Consumer tires (PCR/LTR) purchased on or after January 1, 2024, sold or distributed under the GT Radial, brand bearing the corresponding D.O.T. tire identification number.

To be eligible, the following criteria must be met:

- Purchased in the United States or Canada
- The tires were operated under normal service conditions and used on the same vehicle on which they were originally installed and according to the vehicle manufacturer's recommendations
- The consumer is the original purchaser of the tire
- The tires are of correct size, load and speed rating for the make and type of vehicle
- The tires were used on the proper road surfaces for which they were designed
- The tires are not subject to an exclusion (see “What is not covered by the Standard Limited Warranty”)
- The warranty claim procedure found under “Owners obligation”, is completed in full

### What is covered by the Standard Limited Warranty

Upon examination by the GT Radial representative, any eligible GT Radial tire that has become unusable due to a condition attributable to materials and/or workmanship within 60 months from the date of manufacturing of the tire (DOT), and before the tire wears down to 2/32 inch (1.6 mm), and not subject to the exclusions in “What is not covered by the Standard Limited Warranty”, will be replaced with an equivalent new GT Radial product on the basis set forth in this Limited Warranty.

Adjustment on ride comfort or out-of-round is allowed only during the first 2/32 inch of the original tread depth and within 12 months from the date of purchase (whichever comes first) supported with proof of purchase.

Any GT Radial tire that satisfies the above conditions which has become unusable due to conditions attributable to materials and/or workmanship will be replaced free of charge through a GT Radial Authorized Dealer. The cost of mounting and balancing and other service charges, disposal fees, or applicable taxes are payable by the consumer (i.e. vehicle owner / end user).

Any GT Radial tire that has been worn beyond the first 2/32 inch of the original usable tread depth which is adjusted under this Standard Limited Warranty due to workmanship and/or materials will be replaced with an equivalent new GT Radial product subject to a pro-rated charge through a GT Radial Authorized Dealer. The cost of mounting, balancing, and other service charges, disposal fees, or applicable taxes are payable by the consumer.

### What is not covered by the Standard Limited Warranty

This Standard Limited Warranty does not apply to consumer (PCR/LTR) tires which have become unserviceable under (but not limited to) the following conditions:

- Purchased or used outside the United States or Canada
- Incorrect size or load rating for the vehicle
- Road hazard injury (e.g., a cut, snag, bruise, impact damage or puncture).
- Improper use or operation, including improper inflation pressure, overloading, curbing, use of improper rim or wheel, improper mounting or demounting, tire/wheel spinning, misuse, misapplication, negligence, tire alteration, or use in competition or racing
- Use in commercial applications for tread wear
- Improper maintenance of tire, wheel, or vehicle components: misalignment, imbalance, worn components, or other vehicle conditions, characteristics or defects
- Highway tires that are operated in on-off highway applications
- Tires subjected to severe under-inflated or run-flat conditions
- Improperly repaired tire
- Uneven or rapid wear which is caused by mechanical irregularity in the vehicle such as wheel misalignment, (measured tread difference of 2/32 inch or more across the tread on the same tire)
- Accident, fire, chemical corrosion, or vandalism
- Flat spotting caused by improper storage or brake lock
- Contamination or degradation by petroleum products or other chemicals, solid or gaseous materials other than air, nitrogen or carbon dioxide (for example, water-based sealers or balancing substances)
- Ozone or weather cracking after 48 months from manufacturing date
- With the serial number buffed, cut or illegible
- With less than 2/32nds of an inch remaining tread in any groove
- With a ride disturbance complaint that occurs after the first 2/32nds of tread wear
- Damaged through use of any tube or flap
- Damaged through improper use of tire chains
- Use of Run Flat technology tires without a properly operating low air pressure warning system (TPMS – Tire Pressure Monitoring System)

**See Owner's Obligation section for claim eligibility.**



## Limited Mileage Warranty

This Limited Mileage Warranty applies to all new consumer (PCR/LTR) tires purchased on or after January 1, 2024, sold or distributed under the GT Radial brand bearing the corresponding D.O.T. tire identification number. The following GT Radial brand pattern designs are covered by a limited warranty for tread wear as follows:

Tire Pattern	Mileage Warranty*
CHAMPIRO UHP <sup>AS</sup>	45,000 Miles
MAXTOUR LX	70,000 Miles
CHAMPIRO TOURING A/S	60,000 Miles
MAXTOUR ALL SEASON	60,000 Miles
ADVENTURO HT	65,000 Miles (50,000 for LT)
ADVENTURO AT <sup>3</sup>	50,000 Miles (P-Metric Only)
ADVENTURO ATX	50,000 Miles
SAVERO HT <sup>2</sup>	50,000 Miles

\*Half stated mileage warranty for rear of split fitment

### Eligibility

To be eligible, the consumer (PCR/LTR) tire must meet the following criteria:

- Purchased in the United States or Canada
- GT Radial will provide a prorated mileage credit towards the purchase of a comparable GT Radial tire. Vehicles with staggered fitments (e.g. front and rear tire sizes are different) cannot be rotated. Therefore, GT Radial warrants tires mounted in the rear axles of vehicles with staggered fitments only up to 50% of the warranted miles under the Standard GT Radial Mileage warranty
- Is properly serviced and maintained, with periodic rotation, all evidenced by acceptable service records
- Tread is evenly worn down to the top of the treadwear indicator bars
- Was mounted within 60 months from the date of purchase
- The tire is of the correct size and load rating for the make and type of vehicle
- The tire has been used on road surfaces for which the tire has been designed
- Original proof of purchase with installation miles must be provided
- The tire is not subject to exclusion (see “What is not covered by the Limited Mileage Warranty”)

Driving habits, driving conditions, road conditions, and vehicle maintenance all play a part in the tread life of a tire. If a tire does not reach the warranted mileage, and the owner of the tire has complied with the terms and conditions of the Limited Mileage Warranty, GT Radial will replace the tire as follows:

Eligible Mileage Warranty claims are based on the tire being evenly worn down to 2/32” Remaining Tread Depth (RTD). If such point is reached before warranty miles are achieved, GT Radial will make an allowance for the difference of the warranted mileage versus the actual mileage achieved, toward the purchase of a comparable new GT Radial brand tire, prorated on warranted mileage. The mileage shall be measured on the properly functioning odometer of the vehicle under normal passenger car, SUV/CUV, or Light Truck use.

The adjustment allowance for tires submitted with 3/32” or 4/32” RTD will be based on the warranted miles not achieved if the tire had been allowed to run down to 2/32” RTD.

The Authorized Dealer will calculate the replacement allowance by multiplying the percentage of the warranted mileage not received by the retailer's selling price at the time and place of the adjustment.

### What is not covered by the Limited Mileage Warranty

- Tires of incorrect size or load rating for the vehicle
- Tires not rotated in accordance with the prescribed rotation patterns and mileage levels as recommended by either the vehicle manufacturer or GT Radial
- Tires damaged due to road hazard injury (e.g., a cut, snag, bruise, impact damage or puncture)
- Improper use or operation, including improper inflation pressure, overloading, curbing, use of improper rim or wheel, improper mounting or demounting, tire/wheel spinning, misuse, misapplication, negligence, tire alteration, or use in competition or racing
- Tires used in commercial applications including, but not limited to, police, taxi service, national account, government, or contract sales
- Tires installed on any vehicle other than the vehicle on which the tires were originally installed
- Improper maintenance of tire, wheel or vehicle components: misalignment, imbalance, worn components, or other vehicle conditions, characteristics or defects
- Highway tires that are operated in on-off highway applications
- Tires subjected to severe under-inflated or run-flat conditions
- Improperly repaired tire
- Uneven or rapid wear which is caused by mechanical irregularity in the vehicle such as wheel misalignment, (measured tread difference of 2/32 inch or more across the tread on the same tire)
- Tires damaged by an accident, fire, chemical corrosion, tire alteration, or vandalism
- Tires which have flat spotting caused by improper storage or brake lock
- Contamination or degradation by petroleum products or other chemicals, solid or gaseous materials other than air, nitrogen, or carbon dioxide (for example, water-based sealers or balancing substances)
- With the serial number buffed, cut, or illegible
- Purchased or used outside the United States or Canada

**See Owner's Obligation section for claim eligibility.**





## Road Hazard Warranty

This warranty applies to any new GT Radial Maxtour LX, Champiro UHP AS, Adventuro HT, Adventuro ATX brand replacement tire purchased on or after January 1, 2024 used in normal service on the vehicle on which it was originally fitted and in accordance with the maintenance recommendations and safety warning contained in the vehicle's original owner's manual for the first 12,000 Miles / 20,000 Kilometers or 12 months from the date of purchase, whichever comes first.

At that time, all warranties, expressed or implied, expire. If an eligible tire is rendered unserviceable due to a non-repairable road hazard (cut, tear, impact break or puncture) during the first 12,000 Miles / 20,000 Kilometers of original tread life as measured on the properly functioning odometer of the vehicle or twelve (12) months from the date of purchase, whichever comes first, it will be replaced with a comparable new GT Radial Maxtour LX, Champiro UHP AS, Adventuro HT, Adventuro ATX prorated on warranted mileage.

The retailer will calculate the replacement allowance by multiplying the percentage of the warranted mileage not received by the retailer's selling price at the time and place of adjustment.

A comparable new GT Radial Maxtour LX, Champiro UHP AS, Adventuro HT, Adventuro ATX is a tire of the same line, or in the event that a tire of the same line is not available, a tire of the same basic construction and quality which differs only in sidewall or tread design.

If a higher price tire is accepted as a replacement tire or you wish to upgrade to a more expensive tire at the time of adjustment, you will be responsible for any additional costs of the replacement tire versus the original tire.

A \$10 per tire processing fee applies to each replacement transaction. The \$10 per tire processing fee will be deducted from the adjustment credit memo per tire, per transaction. In addition, all service charges (mounting, balancing or new valve) and applicable taxes are not included.

### What is not covered by the Warranty

- Tires purchased before January 1, 2024
- Ozone or weather cracking;
- The addition of liquid, solid or gaseous materials other than air, nitrogen or carbon dioxide (e.g. water-based sealers or balancing substances);
- Flat spotting caused by improper storage;
- Use in commercial applications for tread wear claims;
- Uneven or rapid wear which is caused by mechanical irregularity in the vehicle such as wheel misalignment;
- Tires used in commercial application including but not limited to police, taxi and limousine applications;
- Tire damage of any kind caused by misuse, improper maintenance, overloading, racing, improper inflation, chain damage, high speed spin out(s), or the mechanical condition of the vehicle;
- Purchased or used outside the United States or Canada;
- Continued use while tire is flat or severely under inflated
- Tires with DOT number cut or buffed. Tires must have Department of Transportation identification numbers
- Tire damage due to wreck, collision, chemical contamination, fire or vandalism
- Any GT Radial Maxtour LX, Champiro UHP AS, Adventuro HT, Adventuro ATX tire altered to change its appearance after date of purchase
- Tire damage due to improper mounting/tire/wheel unbalancing or demounting
- Any GT Radial Maxtour LX, Champiro UHP AS, Adventuro HT, Adventuro ATX tire that becomes unserviceable due to workmanship or material defects covered by the GT Radial Tire Limited Warranty

See Owner's Obligation section for claim eligibility.



## 24 Hour Roadside Assistance

days a year, anywhere in the United States and Canada, for 2 years from the date of purchase of your GT Radial Maxtour LX, Champiro UHP AS, Adventuro HT, Adventuro ATX tires. In the event of a flat tire, you must call the toll-free number below and a qualified service provider will replace the flat tire with your inflated spare. If you do not carry an inflated spare and a tow or other services are necessary, you will be solely responsible for any charges incurred.

Services exclude RV's, fleet vehicles, off-road vehicles, or vehicles off the road (winch-out), trailers, any vehicles in tow, vehicle over one ton capacity, commercial vehicles, vehicles already at a repair facility or any vehicle which at the sole determination of the service provider, is in such condition that service is likely to result in damage to the vehicle. Theft, vandalism and accident related incidents are not covered. Service may not be available in areas where state/provincial providers are exclusively utilized.

To ensure prompt dispatch of service, please have the following information available:

1. Your VIN (Vehicle Identification Number)
2. Description of Vehicle - license plate #, make, model & year
3. Your name and number you are calling from
4. Location of vehicle - street address and/or nearest cross street

### For Dispatch Only: 1-800-999-9460

Pattern	Account Numbers
MAXTOUR LX	690063
CHAMPIRO UHP AS	690945
ADVENTURO HT	690946
ADVENTURO ATX	690947

## Tire Registration

The registration of a consumer (PCR/LTR) tire is a very important safety precaution required by Federal law.

Tire registration will allow GT Radial to notify the owner in the unlikely event of a product return program. The Authorized Dealer will provide a tire registration card to record the D.O.T. tire identification number, along with the dealer's name and address.

The Owner is required to fill in his or her name and address, and mail to the address printed on the card or make the tire registration online at: <http://gtradial-us.com/en/tire-registration.asp>



## Limitations & Disclaimer

This Limited Warranty is not a warranty that a tire failure will not occur or become unserviceable.

THIS LIMITED WARRANTY IS IN LIEU OF, AND GITI TIRE (USA) HEREBY DISCLAIMS, TO THE EXTENT PERMITTED BY LAW, ANY AND ALL OTHER WARRANTIES AND REPRESENTATIONS, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE AND NON-INFRINGEMENT, AND NO OTHER WARRANTY OR REPRESENTATION OF ANY KIND IS MADE BY GITI TIRE (USA) OR WILL BE IMPLIED BY LAW. THE REMEDIES SET FORTH IN THIS LIMITED WARRANTY ARE THE SOLE AND EXCLUSIVE REMEDIES FOR BREACH OF WARRANTY. FURTHER, TO THE EXTENT PERMITTED BY LAW, GITI TIRE (USA) DISCLAIMS ANY LIABILITY FOR ANY INDIRECT DAMAGES, SPECIAL DAMAGES, PUNITIVE DAMAGES, INCIDENTAL DAMAGES, CONSEQUENTIAL DAMAGES, LOSS OF PROFITS, LOSS OF REVENUES, LOSS OF BUSINESS, LOSS OF GOODWILL OR REPUTATION, LOSS OF TIME, LOSS OF VEHICLE USE, LOSS OF TIRE USE, INCONVENIENCE, OR OTHER COSTS, EXPENSES OR LOSSES OF ANY KIND.

Some states and provinces do not allow limitations on the duration of an implied warranty and/or the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you.

This Limited Warranty is the only express warranty applicable to GT Radial Brand tires and supersedes the terms of any previous warranty. GITI Tire (USA) does not authorize anyone to assume for it any warranty.

## Owner's Obligation

To make an eligible claim under this 5 Year Limited Warranty and/or Mileage Warranty:

- Owner is responsible for proper maintenance of tire and vehicle, and maintaining proper tire air pressure
- Owner is responsible to have the tires rotated every 5,000 to 6,000 miles in accordance with prescribed rotation patterns as recommended by either the vehicle manufacturer or GT Radial. Owner must keep rotation records and present proof of such rotations for eventual warranty adjustments
- When making a claim, the owner must present the tire(s) to be adjusted, with an original sales invoice showing the tire description, mounting mileage, and the date the tire(s) were installed, to an authorized GT Radial retailer. Once replaced, the tire(s) adjusted become property of GT Radial
- Owner is responsible for paying all applicable taxes set forth under this Limited Warranty
- Owner is also responsible for paying local tire-disposal fees and any parts or service, regardless of mileage or months of service. This includes payment for tire rotation, alignment, towing, road service, valve stems and tire repairs
- The mounting, balancing, alignment, or any other services rendered to the vehicle shall be made by a service provider authorized to perform such services
- No claim will be recognized unless submitted on a GT Radial claim form

## Notes

[illegible]





/GTRadialUSA



@GTRadialUSA



/GTRadialNorthAmerica

**WWW.GTRADIAL.COM**

contact@gtradial-us.com

5144039-01-24