

WORLD CLASS TECHNOLOGY & QUALITY

2020 PRODUCT GUIDE

WINTER

EXPERIENCE THE PERFORMANCE



**EXPERIENCE THE
PERFORMANCE**





WINTER

ICEPRO³		STUDDABLE WINTER	4
CHAMPIRO ICEPRO		STUDDABLE WINTER	6
ICEPRO SUV³		STUDDABLE WINTER SUV & PICKUP	8
CHAMPIRO ICEPRO SUV		STUDDABLE WINTER SUV	10
CHAMPIRO ICEPRO 2		STUDDABLE WINTER LIGHT TRUCK	12
CHAMPIRO WINTERPRO HP		STUDLESS WINTER PERFORMANCE	14
WINTERPRO²		STUDLESS WINTER	16
SAVERO WT		STUDLESS WINTER SUV	18
		POSITIONING CHARTS	20
		DESIGNATIONS, LOAD INDEX & SPEED RATING	21
		WARRANTY & OWNER'S OBLIGATION	22

IcePro³

STUDDABLE WINTER

14 - 18 Inch 

Speed Rating: T / H 

40 - 70 Series 

M+S Rated 



IcePro³ is the next generation of studdable winter tire with coverage for a wide range of passenger and crossover vehicles. Improvements in stud pin hole design and distribution maximize ice traction while an optimized tread pattern enhances grip and reduces noise generation. Designed to handle the harshest ice and snow conditions, the IcePro³ can be used with or without studs.



FEATURES / BENEFITS

Directional Tread Pattern

Exceptional grip and traction in deep snow and reduced road noise generation

Optimal Stud Distribution

Optimized distribution of up to 140 stud pin holes improve traction and braking on ice when studs are used

Wide Tread Grooves

Effectively removes slush and ice from tread contact area

High Silica Compound

Delivers excellent mileage and enhanced ice and snow performance in low temperatures

Tire Size	LI / SR	Item Number	Factory Studded Item #	Measuring Rim inch	Rim Width Range inch	Max. Load lbs	Max. Pressure psi	Tread Depth 32nd	Overall Diameter inch	Section Width inch	Weight lbs	Side Wall	Stud Type
175/65R14	86T XL	100A3139	100A3139S	5.0	5.0 - 6.0	1,168	50	11	23.0	7.0	17.6	BSW	TIKKA A8-10
185/65R14	90T XL	100A3142	100A3142S	5.5	5.0 - 6.5	1,323	50	11	23.5	7.4	18.8	BSW	TIKKA A8-10
175/70R14	88T XL	100A3140	100A3140S	5.0	4.5 - 6.0	1,235	50	11	23.7	7.0	18.5	BSW	TIKKA A8-10
185/70R14	92T XL	100A3144	100A3144S	5.5	4.5 - 6.0	1,389	50	11	24.3	7.4	20.4	BSW	TIKKA A8-10
185/60R15	88T XL	100A3141	100A3141S	5.5	5.0 - 6.5	1,235	50	11	23.7	7.4	19.6	BSW	TIKKA A8-10
195/60R15	92T XL	100A3145	100A3145S	6.0	5.5 - 7.0	1,389	50	11	24.2	7.9	20.5	BSW	TIKKA A8-10
175/65R15	84T	100A3966	100A3966S	5.0	5.0 - 6.0	1,102	44	11	24.0	7.0	18.4	BSW	TIKKA A8-10
185/65R15	88T	100A3143	100A3143S	5.5	5.0 - 6.5	1,235	44	11	24.5	7.4	18.5	BSW	TIKKA A8-10
195/65R15	95T XL	100A3146	100A3146S	6.0	5.5 - 7.0	1,521	50	11	25.0	7.9	21.0	BSW	TIKKA A8-10
205/55R16	94T XL	100A3138	100A3138S	6.5	5.5 - 7.5	1,477	50	11	24.9	8.4	21.8	BSW	TIKKA A8-10
215/55R16	97T XL	100A3149	100A3149S	7.0	6.0 - 7.5	1,609	50	11	25.3	8.9	24.5	BSW	TIKKA A8-10
205/60R16	96T XL	100A3147	100A3147S	6.0	5.5 - 7.5	1,565	50	11	25.7	8.2	23.4	BSW	TIKKA A8-10
215/60R16	99T XL	100A3151	100A3151S	6.5	6.0 - 7.5	1,709	50	11	26.1	8.7	25.7	BSW	TIKKA A8-10
225/60R16	98T	100A3158	100A3158S	6.5	6.0 - 8.0	1,653	44	11	26.6	9.0	25.2	BSW	TIKKA A8-10
205/65R16	95T	100A3159	100A3159S	6.0	5.5 - 7.5	1,521	44	11	26.5	8.2	23.9	BSW	TIKKA A8-10
215/65R16	98T	100A3153	100A3153S	6.5	6.0 - 7.5	1,653	44	11	27.0	8.7	25.2	BSW	TIKKA A8-10
205/70R16	97H	100A3963	100A3963S	6.0	5.0 - 7.0	1,609	44	11	27.3	8.2	25.9	BSW	TIKKA A8-10
215/45R17	91T XL	100A3959	100A3959S	7.0	7.0 - 8.0	1,356	50	11	24.6	8.4	24.3	BSW	TIKKA A8-10
225/45R17	94T XL	100A3154	100A3154S	7.5	7.0 - 8.5	1,477	50	11	25.0	8.9	24.1	BSW	TIKKA A8-10
205/50R17	93H XL	100A3961	100A3961S	6.5	5.5 - 7.5	1,433	50	11	25.1	8.4	24.4	BSW	TIKKA A8-10
215/50R17	95T XL	100A3148	100A3148S	7.0	6.0 - 7.5	1,521	50	11	25.5	8.9	23.8	BSW	TIKKA A8-10
225/50R17	98T XL	100A3155	100A3155S	7.0	6.0 - 8.0	1,653	50	11	25.9	9.2	25.0	BSW	TIKKA A8-10
215/55R17	98T XL	100A3150	100A3150S	7.0	6.0 - 7.5	1,653	50	11	26.3	8.9	26.1	BSW	TIKKA A8-10
225/55R17	101T XL	100A3156	100A3156S	7.0	6.0 - 8.0	1,819	50	11	26.8	9.2	27.4	BSW	TIKKA A8-10
235/55R17	99H	100A3957	100A3957S	7.5	6.5 - 8.5	1,709	44	11	27.2	9.6	29.5	BSW	TIKKA A8-10
215/60R17	96T	100A3152	100A3152S	6.5	6.0 - 7.5	1,565	44	11	27.2	8.7	25.3	BSW	TIKKA A8-10
225/60R17	99T	100A3157	100A3157S	6.5	6.0 - 8.0	1,709	44	11	27.6	9.0	26.5	BSW	TIKKA A8-10
225/40R18	92H XL	100A3728	100A3728S	8.0	7.5 - 9.0	1,389	50	11	25.1	9.0	25.0	BSW	TIKKA A8-10
225/45R18	95T XL	100A3960	100A3960S	7.5	7.0 - 8.5	1,521	50	11	25.9	8.9	26.9	BSW	TIKKA A8-10
235/45R18	94T	100A3805	100A3805S	8.0	7.5 - 9.0	1,477	44	12	26.3	9.3	27.1	BSW	TIKKA A8-10
245/45R18	100T XL	100A3965	100A3965S	8.0	7.5 - 9.0	1,764	50	11	26.7	9.6	29.8	BSW	TIKKA A8-10
225/50R18	95T	100A3962	100A3962S	7.0	6.0 - 8.0	1,521	44	11	26.9	9.2	26.7	BSW	TIKKA A8-10
235/50R18	101T XL	100A3729	100A3729S	7.5	6.5 - 8.5	1,819	50	11	27.3	9.6	27.6	BSW	TIKKA A8-10
215/55R18	95T	100A3964	100A3964S	7.0	6.0 - 7.5	1,521	44	11	27.3	8.9	26.1	BSW	TIKKA A8-10
235/55R18	100H	100A3958	100A3958S	7.5	6.5 - 8.5	1,764	44	11	28.1	9.6	36.8	BSW	TIKKA A8-10

LI Load Index SR Speed Rating XL Extra Load BSW Black Side Wall

CHAMPIRO IcePro

STUDDABLE WINTER

13 - 17 Inch 

Speed Rating: T 

45 / 55 - 75 Series 

M+S Rated 



CHAMPIRO IcePro is a studdable winter tire with sizes for passenger and crossover vehicles. Designed to handle the harshest ice and snow conditions, it can be used with or without studs, depending on the level of traction required.

FEATURES / BENEFITS

Studdable Design

Delivers reliability in extreme weather conditions

Special Stud Distribution

Enhanced grip when studs are installed and reduced noise levels

Wide Tread Grooves

Effectively removes slush and ice from tread contact area

Silica Compound

Improved ice performance and snow traction



STUDDABLE WINTER **CHAMPIRO IcePro**

Tire Size	LI / SR	Item Number	Factory Studded Item #	Measuring Rim inch	Rim Width Range inch	Max. Load lbs	Max. Pressure psi	Tread Depth 32nd	Overall Diameter inch	Section Width inch	Weight lbs	Side Wall	Stud Type
175/70R13	82T	100A1664	100A1664S	5.0	4.5 - 6.0	1,047	44	12	22.7	7.0	15.9	BSW	TIKKA A8-10
185/60R14	82T	100A1983	100A1983S	5.5	5.0 - 6.5	1,047	44	12	22.8	7.4	17.2	BSW	TIKKA A8-11
185/55R15	86T XL	100A1984	100A1984S	6.0	5.0 - 6.5	1,168	50	12	23.0	7.6	19.0	BSW	TIKKA A8-10
195/55R15	89T XL	100A1985	100A1985S	6.0	5.5 - 7.0	1,279	50	12	23.4	7.9	20.4	BSW	TIKKA A8-11
205/65R15	94T	100A195	100A195S	6.0	5.5 - 7.0	1,477	44	12	25.5	8.2	23.4	BSW	TIKKA A8-11
205/70R15	96T	100A198	100A198S	6.0	5.5 - 7.0	1,565	44	12	26.3	8.2	24.2	BSW	TIKKA A8-11
205/75R15	97T	100A1986	100A1986S	5.5	5.0 - 7.0	1,609	44	12	27.1	8.0	23.9	BSW	TIKKA A8-11
225/55R16	99T XL	100A1987	100A1987S	7.0	6.0 - 8.0	1,709	50	13	25.7	9.2	25.3	BSW	TIKKA A8-11
225/65R16	100T	100A1670	100A1670S	6.5	6.0 - 8.0	1,764	44	13	27.5	9.0	27.9	BSW	TIKKA A8-11
235/45R17	97T XL	100A1989	100A1989S	8.0	7.5 - 9.0	1,609	50	12	25.4	9.3	25.9	BSW	TIKKA A8-11

LI Load Index SR Speed Rating XL Extra Load BSW Black Side Wall



IcePro SUV³

STUDDABLE WINTER SUV & PICKUP

16 - 20 Inch 

Speed Rating: S / T 

55 - 70 Series 

M+S Rated 



IcePro SUV³ is the next generation of studdable winter tire with sizes for pickup trucks and SUVs. It features high-volume pin hole distribution throughout the tread to maximize ice traction and braking performance. The IcePro SUV³ can be used with or without studs and is designed to provide excellent grip and handling in extreme winter conditions while reducing on road noise.

FEATURES / BENEFITS

Directional Tread Pattern

Pickup and SUV-specific pattern design delivers exceptional grip and traction in deep snow and reduced road noise generation

Optimal Stud Distribution

Optimized distribution of up to 156 stud pin holes improve traction and braking on ice when studs are used

Wide Tread Grooves

Effectively removes slush and ice from tread contact area

High Silica Compound

Delivers excellent mileage and enhanced ice and snow performance in low temperatures



Tire Size	LI / SR	Item Number	Factory Studded Item #	Measuring Rim inch	Rim Width Range inch	Max. Load lbs	Max. Pressure psi	Tread Depth 32nd	Overall Diameter inch	Section Width inch	Weight lbs	Side Wall	Stud Type
215/70R16	100T	100A3160	100A3160S	6.5	5.5 - 7.0	1,764	44	12	27.9	8.7	27.5	BSW	TIKKA A8-10
235/70R16	109T XL	100A3165	100A3165S	7.0	6.0 - 8.0	2,271	50	12	29.0	9.5	32.4	BSW	TIKKA A8-10
235/60R17	106T XL	100A3973	100A3973S	7.0	6.5 - 8.5	2,094	50	12	28.1	9.4	29.2	BSW	TIKKA A8-10
215/65R17	99T	100A3725	100A3725S	6.5	6.0 - 8.0	1,709	44	12	28.0	8.7	27.5	BSW	TIKKA A8-10
225/65R17	102T	100A3161	100A3161S	6.5	6.0 - 8.0	1,874	44	12	28.5	9.0	29.0	BSW	TIKKA A8-10
235/65R17	108T XL	100A3163	100A3163S	7.0	6.5 - 8.5	2,205	50	12	29.1	9.5	32.2	BSW	TIKKA A8-10
265/70R17	115T	100A3670	100A3670S	8.0	7.0 - 9.0	2,679	44	12	31.7	10.7	40.4	BSW	TIKKA A8-10
225/55R18	102T XL	100A3974	100A3974S	7.0	6.0 - 8.0	1,874	50	12	27.8	9.2	27.5	BSW	TIKKA A8-10
225/60R18	104T XL	100A3972	100A3972S	6.5	6.0 - 8.0	1,984	50	12	28.6	9.0	30.2	BSW	TIKKA A8-10
235/60R18	107T XL	100A3162	100A3162S	7.0	6.5 - 8.5	2,149	50	12	29.1	9.5	31.8	BSW	TIKKA A8-10
245/60R18	105T	100A3167	100A3167S	7.0	7.0 - 8.5	2,039	44	12	29.6	9.8	32.1	BSW	TIKKA A8-10
265/60R18	110T	100A3726	100A3726S	8.0	7.5 - 9.0	2,337	44	12	30.1	10.7	36.1	BSW	TIKKA A8-10
235/65R18	106T	100A3164	100A3164S	7.0	6.5 - 8.5	2,094	44	12	30.0	9.5	32.3	BSW	TIKKA A8-10
255/65R18	115T XL	100A3976	100A3976S	7.5	7.0 - 9.0	2,679	50	12	31.1	10.2	37.9	BSW	TIKKA A8-10
265/65R18	116T XL	100A3969	100A3969S	8.0	7.5 - 9.5	2,756	50	12	31.5	10.7	40.1	BSW	TIKKA A8-10
275/65R18	116T	100A3971	100A3971S	8.0	7.5 - 9.5	2,756	44	12	32.1	11.0	42.5	BSW	TIKKA A8-10
255/70R18	113T	100A3968	100A3968S	7.5	6.5 - 8.5	2,535	44	12	32.1	10.2	38.1	BSW	TIKKA A8-10
265/70R18	116T	100A3975	100A3975S	8.0	7.0 - 9.0	2,756	44	12	32.6	10.7	41.5	BSW	TIKKA A8-10
235/55R19	101T	100A3804	100A3804S	7.5	6.5 - 8.5	1,819	44	12	29.2	9.6	30.9	BSW	TIKKA A8-10
245/50R20	102T	100A3970	100A3970S	7.5	7.0 - 8.5	1,874	44	12	29.7	10.0	31.9	BSW	TIKKA A8-10
275/55R20	117S XL	100A3727	100A3727S	8.5	8.0 - 9.5	2,833	50	12	31.9	11.2	41.7	BSW	TIKKA A8-10
275/60R20	116T XL	100A3967	100A3967S	8.0	7.5 - 9.5	2,756	50	12	33.0	11.0	43.2	BSW	TIKKA A8-10

LI Load Index SR Speed Rating XL Extra Load BSW Black Side Wall

CHAMPIRO IcePro SUV

STUDDABLE WINTER SUV

15 - 19 Inch 

Speed Rating: T / H 

50 / 55 / 65 - 75 Series 

M+S Rated 



CHAMPIRO IcePro SUV is a studdable winter tire offering sizes for SUVs. It can be used with or without studs, depending on how much traction is required and is designed to provide excellent grip and handling in extreme winter weather conditions.



FEATURES / BENEFITS

Studdable Design

Delivers reliability in extreme weather conditions

Special Stud Distribution

Enhanced grip when studs are installed and reduced noise levels

Wide Tread Grooves

Effectively removes slush and ice from tread contact area

Silica Compound

Improved ice performance and snow traction

STUDDABLE WINTER SUV **CHAMPIRO IcePro SUV**

Tire Size	LI / SR	Item Number	Factory Studded Item #	Measuring Rim inch	Rim Width Range inch	Max. Load lbs	Max. Pressure psi	Tread Depth 32nd	Overall Diameter inch	Section Width inch	Weight lbs	Side Wall	Stud Type
215/70R15	98T	100A183	100A183S	6.5	6.0 - 7.0	1,653	44	13	26.9	8.7	28.9	BSW	TIKKA A8-11
235/65R16	103T	100A1671	100A1671S	7.0	6.5 - 8.5	1,929	44	13	28.0	9.4	29.8	BSW	TIKKA A8-11
225/70R16	103T	100A176	100A176S	6.5	6.0 - 7.0	1,929	44	13	28.4	9.0	32.2	BSW	TIKKA A8-11
245/70R16	107H	100A1783	100A1783S	7.0	6.5 - 8.0	2,149	44	13	29.5	9.8	31.8	BSW	TIKKA A8-11
265/70R16	112T	100A1991	100A1991S	8.0	7.0 - 9.0	2,469	44	13	30.6	10.7	36.5	BSW	TIKKA A8-11
225/75R16	108H XL	100A1784	100A1784S	6.0	6.0 - 7.5	2,205	50	13	29.3	8.8	29.1	BSW	TIKKA A8-11
245/75R16	111T	100A1785	100A1785S	7.0	6.5 - 8.0	2,403	44	13	30.5	9.8	33.9	BSW	TIKKA A8-11
245/65R17	107T	100A1674	100A1674S	7.0	6.5 - 8.5	2,149	44	13	29.5	9.8	33.1	BSW	TIKKA A8-11
265/65R17	112T	100A1993	100A1993S	8.0	7.5 - 9.5	2,469	44	13	30.6	10.7	37.2	BSW	TIKKA A8-11
245/70R17	110T	100A179	100A179S	7.0	6.5 - 7.5	2,337	44	13	30.6	9.8	37.1	BSW	TIKKA A8-11
255/55R18	109T XL	100A1672	100A1672S	8.0	7.0 - 9.0	2,271	50	13	29.0	10.4	33.8	BSW	TIKKA A8-11
255/50R19	103T	100A1994	100A1994S	8.0	7.0 - 9.0	1,929	44	13	29.1	10.4	33.3	BSW	TIKKA A8-11

LI Load Index SR Speed Rating XL Extra Load BSW Black Side Wall

CHAMPIRO IcePro 2

STUDDABLE WINTER LIGHT TRUCK

16 - 18 

Speed Rating: Q 

65 - 75 Series 

M+S Rated **M+S**



CHAMPIRO IcePro 2 is a studdable winter tire offered in heavy duty 10-ply LT specification sizes. It can be used with or without studs and gives you control in extreme winter conditions where an all-season highway or all-terrain light truck tire just won't do.



FEATURES / BENEFITS

Studdable Design

Delivers reliable traction and performance in extreme winter conditions

Special Stud Distribution

Enhanced grip when studs are installed and reduced noise levels

Wide Tread Grooves

Effectively removes slush and ice from tread contact area

Silica Compound

Improved ice performance and snow traction

Heavy Duty Casing

10-ply construction increases load carrying capacity and durability

STUDDABLE WINTER LIGHT TRUCK **CHAMPIRO IcePro 2**

Tire Size	LI/SR (s/d)	LR/PR	Item Number	Measuring Rim inch	Rim Width Range inch	Max. Load (s/d)	Max. Pressure psi	Tread Depth 32nd	Overall Diameter inch	Section Width inch	Weight lbs	Side Wall	Stud Type
LT225/75R16	115/112Q	E / 10	100A1012	6.0	6.0 - 7.0	2,680/2,470	80	17	29.3	8.8	39.2	BSW	TSMI 15#
LT245/75R16	120/116Q	E / 10	100A214	7.0	6.5 - 7.5	3,042/2,778	80	17	30.7	9.8	43.8	BSW	TSMI 15#
LT245/70R17	119/116Q	E / 10	100A1013	7.0	6.5 - 8.0	3,000/2,755	80	17	30.6	9.8	44.4	BSW	TSMI 15#
LT265/70R17	121/118Q	E / 10	100A1014	8.0	7.5 - 8.5	3,195/2,910	80	17	31.7	10.7	48.1	BSW	TSMI 15#
LT275/65R18	123/120Q	E / 10	100A1015	8.0	7.5 - 9.0	3,415/3,085	80	17	32.1	11.0	50.3	BSW	TSMI 15#

LI Load Index SR Speed Rating (s/d) Single/Dual LR Load Range PR Ply Rating BSW Black Side Wall



CHAMPIRO WinterPro HP

STUDLESS WINTER PERFORMANCE

16 - 19 Inch 

Speed Rating: H / V 

40 - 65 Series 

M+S Rated 



CHAMPIRO WinterPro HP is a studless performance winter tire developed to retain the handling and precision of performance sports cars, sedans and coupes in varied winter conditions. It features an asymmetric tread pattern that disperses water and slush, and a sunflower oil enriched tread compound for excellent traction and braking on snow and ice.

FEATURES / BENEFITS

High Performance Design

Built on a high performance tire platform for handling and precision in winter conditions

Asymmetric Tread Pattern

Provides excellent performance in varied winter conditions

Wide Tread Grooves

Evacuates water, slush and packed snow while maintaining maximum contact with the road

Lateral Cross-Cut Grooves

Disperses water and slush and provides more biting angles for improved snow and ice grip

Sunflower Oil Compound

Tread compound enriched with sunflower oil improves wet braking, handling and snow performance



STUDLESS WINTER PERFORMANCE **CHAMPIRO WinterPro HP**

Tire Size	LI / SR	Item Number	Measuring Rim inch	Rim Width Range inch	Max. Load lbs	Max. Pressure psi	Tread Depth 32nd	Overall Diameter inch	Section Width inch	Weight lbs	Side Wall
205/55R16	94V XL	100A2714	6.5	5.5 - 7.5	1,477	49	11	24.9	8.5	24.7	BSW
205/45R17	88V XL	100A2720	7.0	6.5 - 7.5	1,235	50	11	24.3	8.1	21.8	BSW
225/45R17	94V XL	100A2727	7.5	7.0 - 8.5	1,477	49	11	25.0	8.9	23.0	BSW
235/45R17	97V XL	100A2730	8.0	7.5 - 9.0	1,609	49	11	25.4	9.3	25.2	BSW
245/45R17	99V XL	100A2731	8.0	7.5 - 9.0	1,709	49	11	25.7	9.6	26.8	BSW
205/50R17	93V XL	100A2719	6.5	5.5 - 7.5	1,433	49	11	25.1	8.4	23.3	BSW
225/50R17	98V XL	100A2726	7.0	6.0 - 8.0	1,653	49	11	25.9	9.2	25.5	BSW
225/55R17	101V XL	100A2725	7.0	6.0 - 8.0	1,819	49	11	26.8	9.2	26.8	BSW
235/55R17	103V XL	100A2729	7.5	6.5 - 8.5	1,929	49	11	27.2	9.6	27.4	BSW
215/60R17	96H	100A2721	6.5	6.0 - 7.5	1,565	44	11	27.2	8.7	26.3	BSW
225/60R17	99H	100A2724	6.5	6.0 - 8.0	1,709	44	11	27.6	9.0	27.6	BSW
225/65R17	102H	100A2723	6.5	6.0 - 8.0	1,874	44	11	28.5	9.0	28.8	BSW
225/40R18	92V XL	100A2733	8.0	7.5 - 9.0	1,389	49	11	25.1	9.1	24.6	BSW
245/40R18	97V XL	100A2738	8.5	8.0 - 9.5	1,609	49	11	25.7	9.8	26.7	BSW
225/45R18	95V XL	100A2732	7.5	7.0 - 8.5	1,521	49	11	25.9	8.9	24.9	BSW
245/45R18	100V XL	100A2737	8.0	7.5 - 9.0	1,764	49	11	26.7	9.6	28.0	BSW
235/50R18	101V XL	100A2736	7.5	6.5 - 8.5	1,819	49	11	27.3	9.6	27.9	BSW
235/55R18	104V XL	100A2735	7.5	6.5 - 8.5	1,984	49	11	28.1	9.6	28.8	BSW
255/55R18	109V XL	100A2739	8.0	7.0 - 9.0	2,271	49	11	29.0	10.4	30.9	BSW
235/60R18	107H XL	100A2734	7.0	6.5 - 8.5	2,149	49	11	29.1	9.4	30.5	BSW
255/50R19	107V XL	100A2740	8.0	7.0 - 9.0	2,149	49	11	29.1	10.4	32.2	BSW

LI Load Index SR Speed Rating XL Extra Load BSW Black Side Wall

WINTERPRO²

STUDLESS WINTER

16 - 19 Inch 

Speed Rating: H / V 

40 - 60 Series 

M+S Rated **M+S**



Wet



Handling



Comfort



Winter

WINTERPRO² is the latest studless winter tire with fitments for a wide range of passenger and crossover vehicles. It features a directional pattern design for enhanced traction and stability and an innovative tread compound that delivers lower rolling resistance and better wear life. WINTERPRO² provides optimal wet, ice and snow performance and also excels on dry roads.

FEATURES / BENEFITS

Variable Pitch Technology

Reduced road noise for a quieter ride

Unique Sipe Design

Two types of tread sipe styles and alternating sipe depths for improved snow performance and durability

Directional Tread Pattern

Enhanced traction, stability and directional control

Large Contact Patch

Improved grip, handling and control

Innovative Compound

Silica and Nanoscopic carbon black tread compound improves winter performance, lowers rolling resistance and increases wear life



Tire Size	LI / SR	Item Number	Measuring Rim inch	Rim Width Range inch	Max. Load lbs	Max. Pressure psi	Tread Depth 32nd	Overall Diameter inch	Section Width inch	Weight lbs	Side Wall
155/70R13	75T	100A3186	4.5	4.0 - 5.0	853	44	11	21.6	6.2	12.9	BSW
165/70R13	79T	100A3189	5.0	4.0 - 5.5	963	44	11	22.1	6.7	14.1	BSW
175/70R13	82T	100A3192	5.0	4.5 - 5.5	1,047	44	11	22.7	7.0	15.1	BSW
155/80R13	79T	100A3193	4.5	4.0 - 5.0	963	44	11	22.8	6.2	13.8	BSW
185/60R14	82T	100A3179	5.5	5.0 - 6.5	1,047	44	11	22.8	7.4	16.1	BSW
155/65R14	75T	100A3188	4.5	4.5 - 5.5	853	44	11	22.0	6.2	13.7	BSW
165/65R14	79T	100A3191	5.0	4.5 - 6.0	963	44	11	22.4	6.7	14.7	BSW
175/65R14	82T	100A3170	5.0	5.0 - 6.0	1,047	44	11	23.0	7.0	15.6	BSW
175/65R14	86T XL	100A3203	5.0	5.0 - 6.0	1,168	50	11	23.0	7.0	16.4	BSW
185/65R14	86T	100A3182	5.5	5.0 - 6.5	1,168	44	11	23.5	7.4	17.7	BSW
165/70R14	81T	100A3172	5.0	4.0 - 5.5	1,019	44	11	23.1	6.7	15.0	BSW
175/70R14	84T	100A3178	5.0	4.5 - 5.5	1,102	44	11	23.7	7.0	16.5	BSW
185/70R14	88T	100A3199	5.5	4.5 - 6.0	1,235	44	11	24.3	7.4	17.9	BSW
195/50R15	82H	100A3201	6.0	5.5 - 7.0	1,047	44	11	22.7	7.9	17.5	BSW
185/55R15	82T	100A3190	6.0	5.0 - 6.5	1,047	44	11	23.0	7.6	17.2	BSW
195/55R15	85H	100A3195	6.0	5.5 - 7.0	1,135	44	11	23.4	7.9	18.3	BSW
185/60R15	84T	100A3177	5.5	5.0 - 6.5	1,102	44	11	23.7	7.4	17.1	BSW
185/60R15	88T XL	100A3173	5.5	5.0 - 6.5	1,235	50	11	23.7	7.4	17.3	BSW
195/60R15	88T	100A3185	6.0	5.5 - 7.0	1,235	44	11	24.2	7.9	18.8	BSW
175/65R15	84T	100A3181	5.0	5.0 - 6.0	1,102	44	11	24.0	7.0	16.8	BSW
185/65R15	88T	100A3169	5.5	5.0 - 6.5	1,235	44	11	24.4	7.4	18.7	BSW
195/65R15	95T XL	100A3180	6.0	5.5 - 7.0	1,521	50	11	25.0	7.9	18.9	BSW
195/65R15	91T	100A3183	6.0	5.5 - 7.0	1,356	44	11	25.0	7.9	18.8	BSW
195/65R15	91H	100A3109	6.0	5.5 - 7.0	1,356	44	11	25.0	7.9	19.9	BSW
205/65R15	94T	100A3198	6.0	5.5 - 7.5	1,477	44	11	25.5	8.2	22.3	BSW
195/55R16	91H XL	100A3477	6.0	5.5 - 7.0	1,356	50	11	24.4	7.9	18.8	BSW
205/55R16	91T	100A3171	6.5	5.5 - 7.5	1,356	44	11	24.9	8.4	19.1	BSW
205/55R16	91H	100A3168	6.5	5.5 - 7.5	1,356	44	11	24.9	8.4	21.9	BSW
215/55R16	93H	100A3187	7.0	6.0 - 7.5	1,433	44	11	25.3	8.9	23.2	BSW
215/55R16	97H XL	100A3194	7.0	6.0 - 7.5	1,609	50	11	25.3	8.9	23.6	BSW
225/55R16	99H XL	100A3196	7.0	6.0 - 8.0	1,790	50	11	25.7	9.2	24.7	BSW
195/60R16	89H	100A3476	6.0	5.5 - 7.0	1,279	44	11	25.2	7.9	19.1	BSW
205/60R16	92H	100A3174	6.0	5.5 - 7.5	1,389	44	11	25.7	8.2	20.6	BSW
205/60R16	96H XL	100A3176	6.0	5.5 - 7.5	1,565	50	11	25.7	8.2	20.9	BSW
215/60R16	99H XL	100A3175	6.5	6.0 - 7.5	1,709	50	11	26.1	8.7	22.6	BSW
215/65R16	98H	100A3184	6.5	6.0 - 7.5	1,653	44	11	27.0	8.7	25.0	BSW
215/70R16	100T	100A3204	6.5	5.5 - 7.0	1,764	44	11	27.9	8.7	25.0	BSW
215/70R16	100H	100A3205	6.5	5.5 - 7.0	1,764	44	11	27.9	8.7	25.7	BSW
215/50R17	95V XL	100A3200	7.0	6.0 - 7.5	1,521	50	11	25.5	8.9	23.8	BSW
205/55R17	95H XL	100A3202	6.5	5.5 - 7.5	1,521	50	11	25.9	8.4	22.0	BSW
215/55R17	98V XL	100A3197	7.0	6.0 - 7.5	1,653	50	11	26.3	8.9	23.5	BSW
235/60R17	106H XL	100A3479	7.0	6.5 - 8.5	2,094	50	11	28.1	9.4	29.1	BSW
235/65R17	108H XL	100A3478	7.0	6.5 - 8.5	2,205	50	11	29.1	9.5	30.2	BSW
245/65R17	111H XL	100A3110	7.0	7.0 - 8.5	2,403	50	11	29.5	9.8	32.6	BSW

LI Load Index SR Speed Rating XL Extra Load BSW Black Side Wall

SAVERO WT

STUDLESS WINTER SUV

15 - 17 Inch 

Speed Rating: T 

60 - 75 Series 

M+S Rated 



SAVERO WT is a studless winter tire made specifically for SUVs and crossover vehicles so they can handle challenging winter conditions. It features a directional tread pattern with aggressive grooving and low temperature compound to enhance ice and snow performance.



FEATURES / BENEFITS

Directional Tread Pattern

Improved wet handling and reduced tire noise

Tread Grooving

Aggressive circumferential and slanted lateral tread grooves provide self-cleaning function

Wave-Shaped Sipes

Improved traction on slippery surfaces

Continuous Center Rib

Provides good stability and steering response



Low Temperature Compound

Tread compound formulated to operate in low temperature enhances ice and snow driving performance


Tire Size	LI / SR	Item Number	Measuring Rim inch	Rim Width Range inch	Max. Load lbs	Max. Pressure psi	Tread Depth 32nd	Overall Diameter inch	Section Width inch	Weight lbs	Side Wall
235/75R15	105T	100A341	6.5	6.0 - 8.0	2,039	35	14	28.9	9.3	31.5	BSW
255/65R16	109T	100A358	7.5	7.0 - 9.0	2,271	35	14	29.1	10.2	35.3	BSW
225/70R16	103T	100A1051	6.5	6.0 - 7.5	1,929	36	14	28.4	9.0	30.7	BSW
235/70R16	106T	100A1052	7.0	6.0 - 8.0	2,094	36	14	29.0	9.4	33.6	BSW
245/70R16	107T	100A348	7.0	6.5 - 8.0	2,149	35	14	29.5	9.8	37.3	BSW
255/70R16	111T	100A349	7.5	6.5 - 8.5	2,403	35	14	30.1	10.2	39.4	BSW
265/70R16	112T	100A353	8.0	7.0 - 9.0	2,469	35	14	30.6	10.7	40.8	BSW
225/75R16	104T	100A342	6.0	6.0 - 7.5	1,984	35	14	29.3	9.0	31.1	BSW
245/75R16	111T	100A343	7.0	6.5 - 8.0	2,403	35	14	30.5	9.8	37.9	BSW
275/60R17	111T	100A359	8.0	7.5 - 9.5	2,409	35	14	30.0	11.0	42.4	BSW
265/70R17	115T	100A354	8.0	7.0 - 9.0	2,679	35	14	31.7	10.7	43.5	BSW

LI Load Index **SR** Speed Rating **XL** Extra Load **BSW** Black Side Wall

Positioning Charts

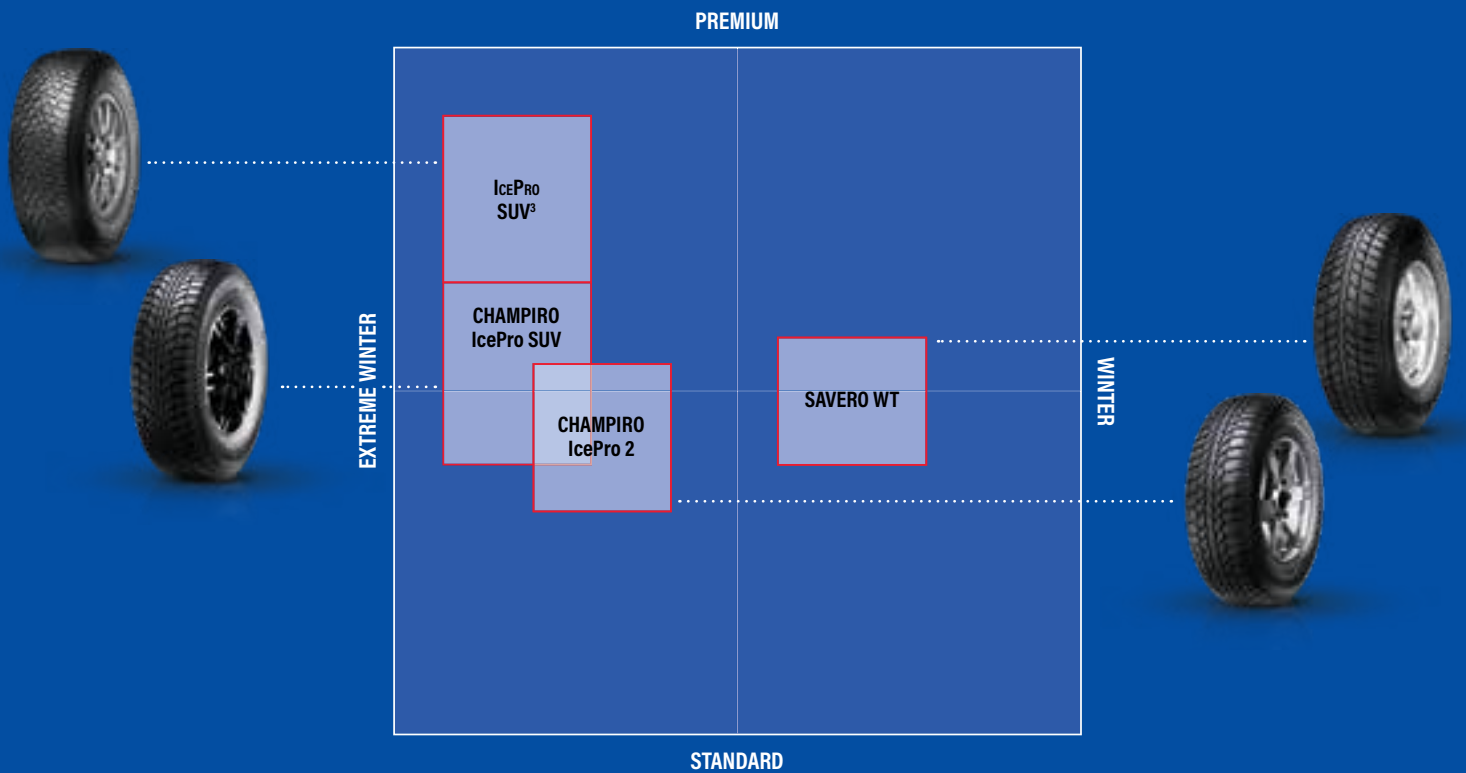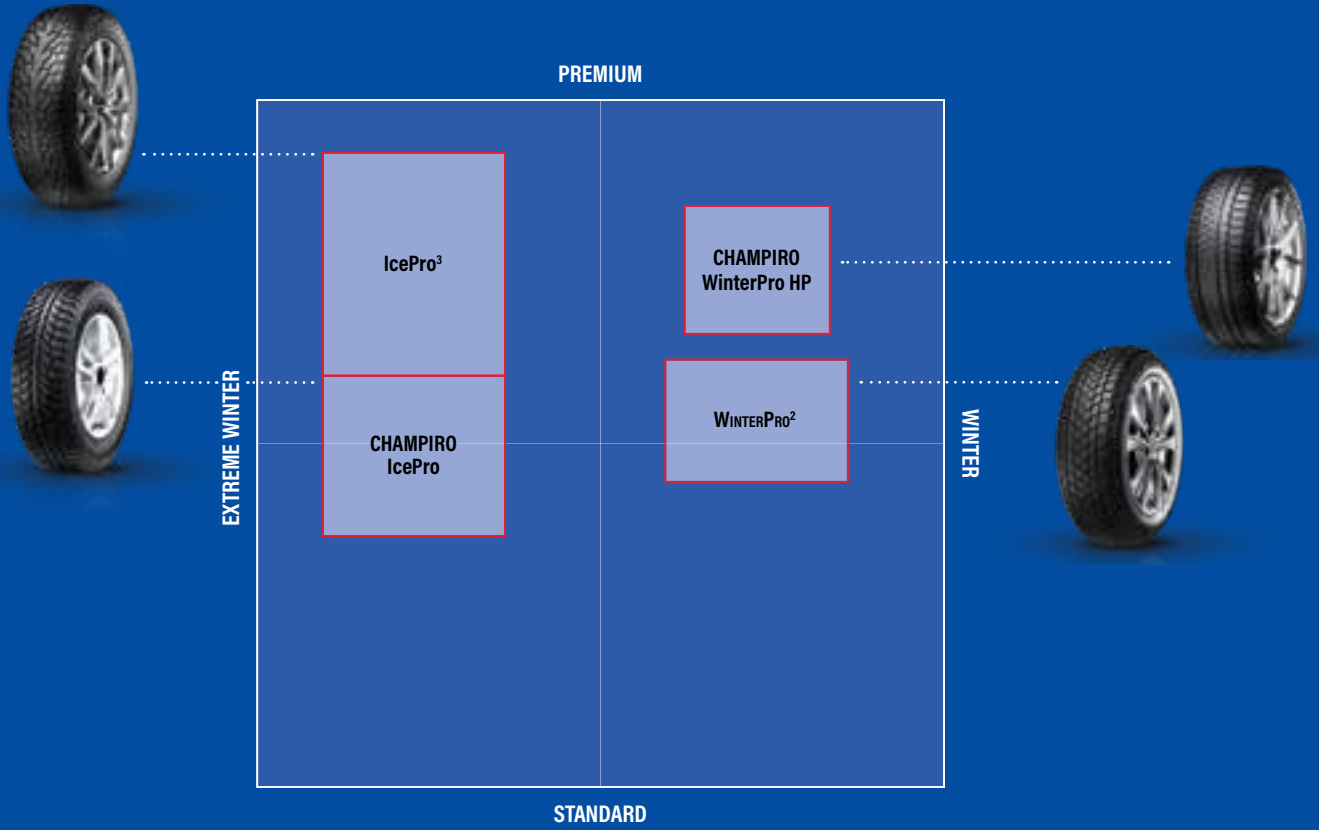

Designations, Load Index & Speed Rating

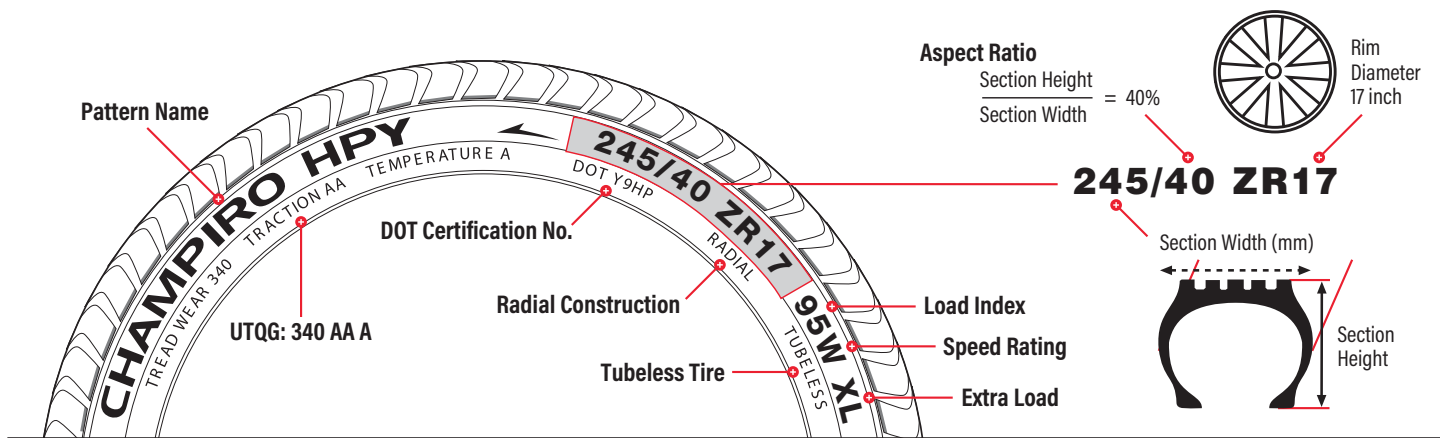

Before fitting, it is essential to check the different markings to ensure that the tire meets the maximum load and speed possibilities and/or the regulations in force.

SAFETY WARNING

1. Never inflate beyond 40PSI (275kPa) to seat beads.
2. Tires should always be installed by qualified technicians following USTMA (formerly RMA) installation procedures.
3. Never mount tires on rims which are damaged or not smooth and clean.
4. Never mount a tire with a torn bead.
5. Never inflate a tire that is lying on the floor or other flat surface.
6. Always use a tire mounting machine with hold-down device or safety cage, or bolt to vehicle axle.

MOUNT ONLY ON A RIM OF EXACT SAME DIAMETER AS THE TIRE.

Speed Rating System

SR	MPH	KM/H
B	31	50
C	37	60
D	40	65
E	43	70
F	50	80
G	56	90
J	62	100
K	68	110
L	75	120
M	81	130
N	87	140
P	93	150
Q	100	160
R	106	170
S	113	180
T	118	190
U	124	200
H	130	210
V	149	240
W	168	270
Y	186	300
(Y)	Above 186	Above 300

Load Capacity Index

LI	LBS	KG	LI	LBS	KG
67	677	307	101	1,819	825
68	694	315	102	1,874	850
69	716	325	103	1,929	875
70	739	335	104	1,984	900
71	761	345	105	2,039	925
72	783	355	106	2,094	950
73	805	365	107	2,150	975
74	827	375	108	2,205	1,000
75	852	387	109	2,271	1,030
76	882	400	110	2,337	1,060
77	908	412	111	2,403	1,090
78	937	425	112	2,469	1,120
79	964	437	113	2,535	1,150
80	992	450	114	2,601	1,180
81	1,018	462	115	2,679	1,215
82	1,047	475	116	2,756	1,250
83	1,073	487	117	2,833	1,285
84	1,102	500	118	2,910	1,320
85	1,135	515	119	2,998	1,360
86	1,168	530	120	3,086	1,400
87	1,201	545	121	3,197	1,450
88	1,235	560	122	3,307	1,500
89	1,279	580	123	3,417	1,550
90	1,323	600	124	3,527	1,600
91	1,356	615	125	3,658	1,650
92	1,389	630	126	3,748	1,700
93	1,433	650	127	3,858	1,750
94	1,477	670	128	3,968	1,800
95	1,521	690	129	4,079	1,850
96	1,565	710	130	4,189	1,900
97	1,609	730	131	4,299	1,950
98	1,653	750	132	4,409	2,000
99	1,764	775	133	4,542	2,060
100	1,819	800	134	4,674	2,120

Load Capacity Index

Load Range	Ply Rating	Load Range	Ply Rating
A	2	G	14
B	4	H	16
C	6	J	18
D	8	L	20
E	10	M	22
F	12	N	24

Warranty & Owner's Obligation

5YR

5 Year Limited Warranty

This Standard Limited Warranty Policy and Procedures ("Standard Limited Warranty") applies to all new consumer (PCR/LTR) tires purchased on or after January 1, 2018, sold or distributed under the GT Radial brand bearing the corresponding D.O.T. tire identification number.

To be eligible, the tire must meet the following criteria:

- Purchased in the United States or Canada
- The tires were operated under normal service conditions and used on the same vehicle on which they were originally installed and according to the vehicle manufacturer's recommendations
- The consumer is the original purchaser of the tire
- The tires are of correct size, load and speed rating for the make and type of vehicle
- The tires were used on the proper road surfaces for which they were designed
- The tires are not subject to an exclusion (see "What is not covered by the Standard Limited Warranty")
- The warranty claim procedure, found under "Owner's Obligation," is completed in full

What is covered by the Standard Limited Warranty

Upon examination by the GT Radial representative, any eligible GT Radial tire that has become unusable due to a condition attributable to materials and/or workmanship within 60 months from the date of manufacturing of the tire (DOT), and before the tire wears down to 2/32 inch (1.6 mm), and not subject to the exclusions in section "What is not covered by the Standard Limited Warranty," will be replaced with an equivalent new GT Radial product on the basis set forth in this Limited Warranty.

Adjustment on ride comfort or out-of-round is allowed only during the first 2/32 inch of the original tread depth and within 12 months from the date of purchase (whichever comes first) supported with proof of purchase.

Any GT Radial tire that satisfies the above conditions which has become unusable due to conditions attributable to materials and/or workmanship will be replaced free of charge through a GT Radial Authorized Dealer. The cost of mounting and balancing and other service charges, disposal fees, or applicable taxes are payable by the consumer (i.e. vehicle owner / end user).

Any GT Radial tire that has been worn beyond the first 2/32 inch of the original usable tread depth which is adjusted under this Standard Limited Warranty due to materials and/or workmanship will be replaced with an equivalent new GT Radial product subject to a pro-rated charge through a GT Radial Authorized Dealer. The cost of mounting, balancing, and other service charges, disposal fees, or applicable taxes are payable by the consumer.

What is not covered by the Standard Limited Warranty

This Standard Limited Warranty does not apply to consumer (PCR/LTR) tires which have become unserviceable under (but not limited to) the following conditions:

- Incorrect size or load rating for the vehicle
- Road hazard injury (e.g., a cut, snag, bruise, impact damage or puncture).
For selected products covered by the Road Hazard Warranty, please visit:
<https://www.gtradial-us.com/customer-information/warranty/>
- Improper use or operation, including: improper inflation pressure, overloading, curbing, use of improper rim or wheel, improper mounting or demounting, tire/wheel spinning, misuse, misapplication, negligence, tire alteration, or use in competition or racing
- Use in commercial applications for tread wear
- Improper maintenance of tire, wheel, or vehicle components: misalignment, imbalance, worn components, or other vehicle conditions, characteristics or defects
- Highway tires that are operated in on-off highway applications
- Tires subjected to severe under-inflated or run-flat conditions
- Improperly repaired tire
- Uneven or rapid wear which is caused by mechanical irregularity in the vehicle such as wheel misalignment, (measured tread difference of 2/32 inch or more across the tread on the same tire)
- Accident, fire, chemical corrosion, or vandalism
- Flat spotting caused by improper storage or brake lock
- Contamination or degradation by petroleum products or other chemicals, solid or gaseous materials other than air, nitrogen or carbon dioxide (for example, water based sealers or balancing substances)
- Ozone or weather cracking after 48 months from manufacturing date
- With the serial number buffed, cut or illegible
- Purchased or used outside the United States or Canada
- With less than 2/32nds of an inch remaining tread in any groove
- With a ride disturbance complaint that occurs after the first 2/32nds of tread wear
- Damaged through use of any tube or flap
- Damaged through improper use of tire chains
- Use of Run Flat technology tires without a properly operating low air pressure warning system (TPMS - Tire Pressure Monitoring System)

See *Owner's Obligation* section for claim eligibility.

Owner's Obligation

To make an eligible claim for the 5 Year Limited Warranty:

- The owner must rotate the tires in accordance with prescribed rotation patterns as recommended by either the vehicle manufacturer or GT Radial
- Owner is responsible for proper maintenance of tire and vehicle, and maintaining proper tire pressure
- When making a claim, the owner must present the tire(s) to be adjusted, with an original sales invoice showing the tire description, mounting mileage, and the date the tire(s) were installed, to an authorized GT Radial retailer. Once replaced, the tire(s) adjusted become property of GT Radial
- Owner is responsible for paying all applicable taxes
- Owner is also responsible for paying local tire-disposal fees and any parts or service, regardless of mileage or months of service. This includes payment for tire rotation, alignment, towing, road service, valve stems and tire repairs
- No claim will be recognized unless submitted on a GT Radial claim form





IcePro³



IcePro SUV¹



WinterPro²



SAVERO WT



CHAMPRO IcePro



CHAMPRO IcePro SUV



CHAMPRO IcePro 2



CHAMPRO WinterPro HP

WORLD CLASS TECHNOLOGY & QUALITY

2020



/GTRadialUSA



@gtradialusa



@GTRadialUSA

WWW.GTRADIAL.COM/WINTER

contact@gtradial-us.com